



COMPLETE PRODUCT LINE

Manufacturer of Pumps, Tanks, Heat Exchangers & Accessories



PUMPS



PACKAGES




ACCESSORIES

HISTORY

Flo Fab was established in 1981 by Denis Gauvreau who created and developed the product line, which is constantly being perfected by Marc Gauvreau and a team of professional engineers and designers. It is a combination of existing designs from several renowned products and the innovative ideas of a new generation professionals.

Founder 1981

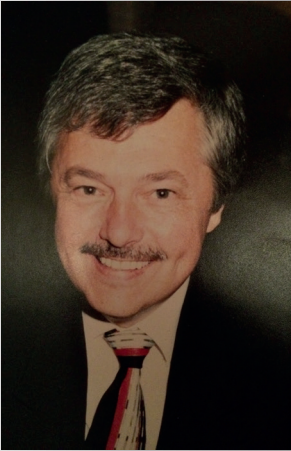

Through the years, Flo Fab has acquired several companies and service entities including: AQUA-PROFAB (ASME Tanks manufacturer), MÉNARD, LÉONARD ÉLECTRIQUE, PMA. Moreover, Flo Fab also purchased equipment, fabrication designs and patterns from IDEALCO, a manufacturer of shell and tube type heat exchangers.

The after-sales services, sales, engineering, R&D, production, quality control, accounting and administration departments of all the above companies share the same location.





In December 2014, Marc Gauvreau, son of the founder, acquired all of the company's shares. Flo Fab and is constantly investing in new state-of-the-art innovations, new products like the XRI series and Prefab Skid for Hydronic Heating & cooling system and pumping systems. This has allowed Flo Fab to retain our competent and qualified staff of professionals with a variety of specialized skills that continually work on improving our existing products and adding new engineered solutions that exceed customers' expectations .


Flo Fab has grown quite rapidly and now proudly offers of a wide range of products available directly from one manufacturer. This includes pumps and pump packages, tanks, heat exchangers and hydronic accessories. This allows each project's stakeholders to enjoy economical savings, peace of mind, best value for their investment and optimized total cost of ownership.

A stylized signature of 'MG' in a cursive font.

TABLE OF CONTENTS


| | |
|--|-----------------|
| VERTICAL IN-LINE PUMPS..... | 3 |
| FEATURE PRODUCT..... | 3 |
| SERIES XRI VARIOUS CONFIGURATIONS..... | 4 |
| HORIZONTAL BASE MOUNTED & CLOSE COUPLED END SUCTION PUMPS..... | 5 |
| SPLIT CASE DOUBLE SUCTION / MULTISTAGE / CLOSE COUPLED STAINLESS PUMPS... | 5 |
| CONDENSATE & TURBINE PUMPS..... | 6 |
| ASME TANKS & AIR SEPARATORS..... | 7 |
| HEAT EXCHANGERS..... | 6 |
| HOW TO PRICE A PACKAGE..... | 7 |
| TYPICAL MECHANICAL ROOM..... | 8 |
| HYDRONIC ACCESSORIES..... | 9 |
| SUBMERSIBLE PUMPS (PLUMBING)..... | 10 |
| PACKAGED SYSTEMS..... | 11-12-13 |
| DIFFERENT SYSTEMS..... | 14-15 |
| COMPLETED AND ONGOING PROJECTS..... | 16 |

| | | | | |
|------------------------------|---|---|---|---|
| |  |  |  |  |
| SERIES | 500 | 600 | 840SC | 880RI |
| SIMILAR TO | Magna / Astro / UP / PL / 00 | 2400 / 1900 / 1600 / S / H / 90 / 60 | | 4300 / 80SC / VLI / KS |
| TYPE | Circulating Pump | In-Line Circulator | Vertical In-Line Centrifugal Split Coupling | Vertical In-Line Centrifugal Split Coupling |
| CAPACITIES | up to 234 USGPM (54 m ³ /hr) | up to 290 USGPM (61 m ³ /hr) | 454 to 8000 USGPM (1816 m ³ /hr) | Up to 3000 USGPM (680 m ³ /hr) |
| HEAD | up to 43 ft. (14 m) | up to 120 ft. (37 m) | up to 410 ft. (125 m) | up to 650 ft. (198 m) |
| PRESSURE | up to 145 PSI (999 kPa) | up to 250 PSI (1724 kPa) | up to 600 PSI (4136 kPa) | up to 250 PSI (1724 kPa) |
| HORSEPOWER | up to 2/5 HP (280 kW) | up to 10 HP (7.5 kW) | up to 400 HP (298 kW) | up to 200 HP (149kW) |
| DRIVES | ECM Motor ERP Ready | 56C Electric Motors | TC Electric Motors | TC Electric Motors |
| APPLICATIONS | Water / Glycol | Water / Glycol | Water / Glycol | Water / Glycol |
| TEMPERATURE | up to 220°F (104°C) | up to 250°F (121°C) | up to 300°F (149°C) | up to 300°F (149 °C) |
| CONSTRUCTION MATERIAL | Cast Iron, Stainless, Bronze | Cast Iron, Bronze Fitted or All Bronze | Cast Iron, Bronze Fitted as Standard. Other materials also available | Cast Iron, Bronze Fitted as Standard. Other materials also available |

| | |
|------------------------------|---|
| |  |
| SERIES | XRI |
| SIMILAR TO | 4300 / 80SC / VSX / VLI / VSM / VSMS |
| TYPE | Universal 10 positions Vertical / Horizontal Centrifugal Pump with removable Impeller |
| CAPACITIES | up to 15850 USGPM 3600 m ³ /hr |
| HEAD | up to 655ft (200m) |
| PRESSURE | up to 600 PSI (4136 kPa) |
| HORSEPOWER | up to 1000 HP (746 kW) |
| DRIVES | TC Electric Motors |
| APPLICATIONS | Water / Glycol |
| TEMPERATURE | up to 300°F (149°C) |
| CONSTRUCTION MATERIAL | Cast Iron, Bronze Fitted as Standard. Other materials also available |

- FEATURE PRODUCT -

VERTICAL POSITION

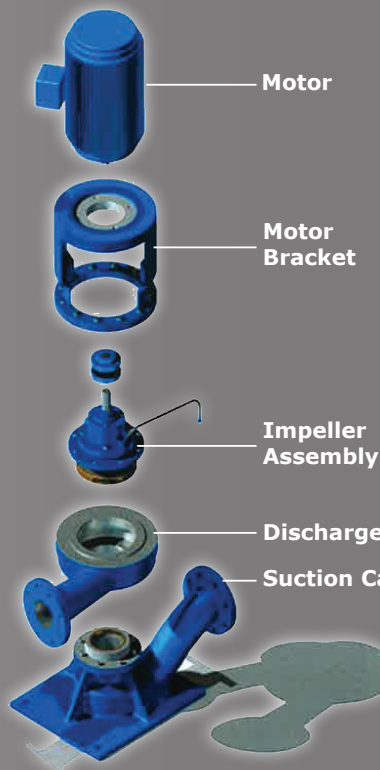


Series XRI construction


Grout not required



Alignment not required

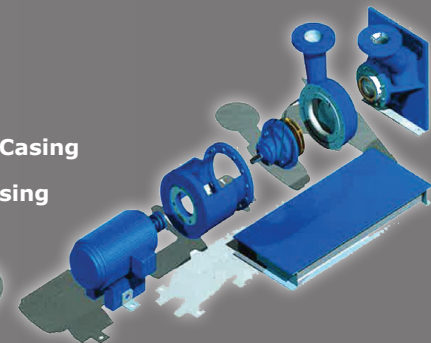


HORIZONTAL POSITION

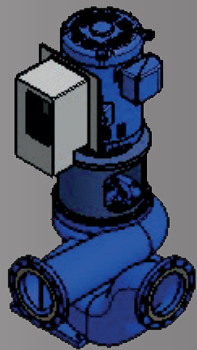


CV

CROSSED VERTICAL

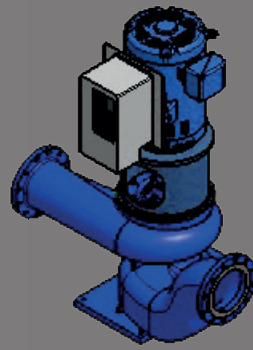


IV

IN-LINE VERTICAL

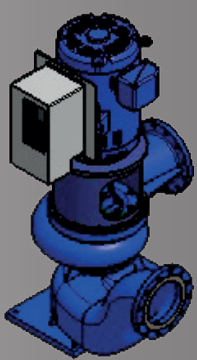


LV

L-SHAPED VERTICAL

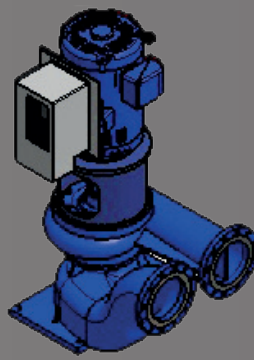


UV

U-SHAPED VERTICAL

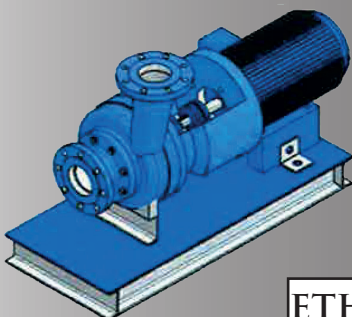


ETH

END SUCTION TOP HORIZONTAL




IH

IN-LINE HORIZONTAL




CH

CROSSED HORIZONTAL




ESH

END SUCTION HORIZONTAL

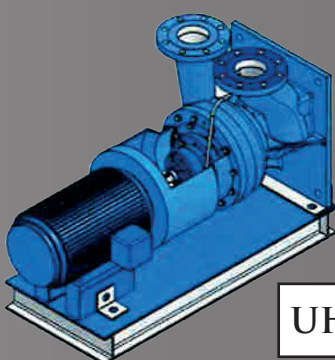

UH

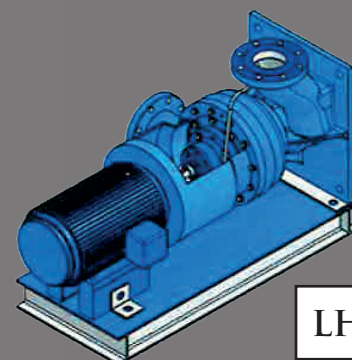


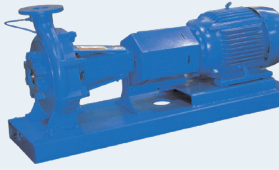
U-SHAPED HORIZONTAL







LH





L-SHAPED HORIZONTAL





VERTICAL IN-LINE, HORIZONTAL BASE MOUNTED, CLOSED COUPLED, AND SPLIT CASE DOUBLE SUCTION TYPE PUMPS



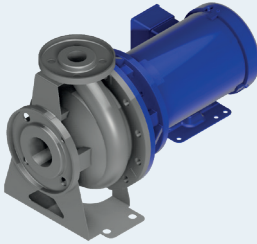

| | | | | |
|------------------------------|---|--|--|--|
| |  |  |  |  |
| SERIES | 880 | 1000/1004 | 2000 | 2300 / 2600 |
| SIMILAR TO | 80 / VL / 4380 | 1530 / 1532 / CM / C LCS / 4280 | LF / F / 4030 / 1510 / FM | LF / F / 4030 / 1510 / FM |
| TYPE | Compact In-Line Centrifugal | End Suction, Close Coupled | Radially Split Bearing Frame Pump Mounted With Flexible Coupling Back PULL-OUT Design | Radially Split Bearing Frame Pump Mounted With Flexible Coupling Back PULL-OUT Design |
| CAPACITIES | up to 3000 USGPM (680 m ³ /hr) | up to 1900 USGPM (431 m ³ /hr) | up to 1900 USGPM (431 m ³ /hr) | from 1900 to 6500 USGPM (432 to 1476 m ³ /hr) |
| HEAD | up to 650 ft. (198 m) | up to 43 ft. (14 m) | up to 120 ft. (37 m) | up to 410 ft. (125 m) |
| PRESSURE | up to 250 PSI (1724 kPa) | up to 175 PSI (1206 kPa) | up to 175 PSI (1206 kPa) with 125# flanges | up to 400 PSI (1206 kPa) with 400# flanges |
| HORSEPOWER | up to 200 HP (149 kW) | up to 200 HP (149 kW) | up to 200 HP (149 kW) | up to 500 HP (373 kW) |
| DRIVES | JM Electric Motors | JM Electric Motors | T Frame Electric Mo- tors or Diesel Engines | T Frame Electric Motors or Diesel Engines |
| APPLICATIONS | Water / Glycol | Water / Glycol | Water / Glycol | Water / Glycol |
| TEMPERATURE | up to 300°F (149 °C) | up to 300°F (149 °C) | up to 300°F (149 °C) | up to 300°F (149 °C) |
| CONSTRUCTION MATERIAL | Cast Iron, Bronze Fitted as Standard. Other mate- rials also available | Cast Iron, Bronze Fitted as Standard. Other mate- rials also available | Cast Iron, Bronze Fitted as Standard. Other mate- rials also available | Cast Iron, Bronze Fitted as Standard. Other mate- rials also available |

| | | | | |
|------------------------------|---|---|--|---|
| |  |  |  |  |
| SERIES | 4800L | 4800U | 4800/4800H/4900 | 4800V |
| SIMILAR TO | VSX / TS | VSX | HSC / 4600 / KPQT / HS | KPV |
| TYPE | Single Stage, Double Suction Split Case | Single Stage, Double Suction Split Case | Horizontally Mounted, Single Stage, Double Suction Split Case | Vertically Mounted, Single Stage, Double Suction Split Case |
| CAPACITIES | up to 12000 USGPM (2725 m ³ /hr) | up to 12000 USGPM (2725 m ³ /hr) | up to 12700 USGPM (2884 m ³ /hr) | up to 12700 USGPM (2884 m ³ /hr) |
| HEAD | up to 750 ft. (227 m) | up to 750 ft. (227 m) | up to 625 ft. (190 m) | up to 625 ft. (190 m) |
| PRESSURE | up to 600 PSI (4136 kPa) | up to 600 PSI (4136 kPa) | up to 600 PSI (4136 kPa) | up to 600 PSI (4136 kPa) |
| HORSEPOWER | up to 800 HP (597 kW) | up to 800 HP (597 kW) | up to 1750 HP (1305 kW) | up to 1750 HP (1305 kW) |
| DRIVES | Electric Motors, Diesel Engines, Steam Turbines | Electric Motors, Diesel Engines, Steam Turbines | Electric Motors, Diesel Engines, Steam Turbines | Electric Motors, Diesel Engines, R.A.G.D |
| APPLICATIONS | Water / Glycol | Water / Glycol | Water / Glycol | Water / Glycol |
| TEMPERATURE | up to 300°F (149°C) | up to 300°F (149°C) | up to 300°F (149°C) | up to 300°F (149°C) |
| CONSTRUCTION MATERIAL | Cast Iron, Bronze Fitted as Standard. Other materials also available | Cast Iron, Bronze Fitted as Standard. Other materials also available | Cast Iron, Bronze Fitted as Standard. Other materials also available | Cast Iron, Bronze Fitted as Standard. Other ma- terials also available |

**MULTISTAGE AND CLOSED COUPLED STAINLESS STEEL TYPE PUMPS
SHELL AND TUBE, PLATE AND FRAME, BRAZED TYPE HEAT EXCHANGERS**

| | | | | |
|------------------------------|---|---|--|---|
| |  |  |  |  |
| SERIES | PSMCF | PSM | PSF | PST |
| SIMILAR TO | | 1535 / 4700 / CR | | SCX / 1700 |
| TYPE | Vertical Multistage | Vertical Multistage | Flanged Close Coupled Centrifugal | NPT Close Coupled Centrifugal |
| CAPACITIES | up to 250 USGPM (56 m ³ /hr) | up to 792 USGPM (180 m ³ /hr) | 13 to 380 USGPM (3 to 86 m ³ /hr) | up to 52 USGPM (12m ³ /hr) |
| HEAD | up to 930 ft. (283 m) | up to 930 ft. (283 m) | up to 150 ft. (46 m) | up to 150 ft. (46 m) |
| PRESSURE | up to 430 PSI (2964 kPa) | up to 430 PSI (2964 kPa) | up to 145 PSI (1000 kPa) | up to 115 PSI (793 kPa) |
| HORSEPOWER | up to 50 HP (37 kW) | up to 100 HP (75 kW) | up to 15 HP (11 kW) | up to 3 HP (2.2 kW) |
| DRIVES | Vertical Electrical Motor | Vertical Electrical Motor | Electric Close Coupled Motors | Vertical Electrical Motor |
| APPLICATIONS | Water and Clear Liquids | Water and Clear Liquids | Water and Clear Liquids | Water and Clear Liquids |
| TEMPERATURE | 5°F (-15°C) to 248°F (120°) | 5°F (-15°C) to 248°F (120°) | up to 225°F (107°C) | up to 225°F (107°C) |
| CONSTRUCTION MATERIAL | #304 Stainless Steel Optional #316 S/S | Cast Iron as Standard, or Stainless Steel #304 & #316 | #304 Stainless Steel | #304 Stainless Steel |

| | | | | | |
|------------------------------|---|----------------|---|---|---|
| |  | |  |  |  |
| | Shell and Tube Heat Exchangers | | Plate and Frame Heat Exchangers | Brazed Heat Exchangers | |
| SERIES | "W" | "S" | "FFW" AHRI | "BR" | IQP1000 / ACH550 |
| TYPE | Water to Water / Glycol to Water | Steam to Water | Steam to Water Water to Water Glycol to Water | Steam to Water Water to Water Glycol to Water | VFD Flo Fab's Preferred* 200-240V / 3-Phase 380-480V / 3-Phase 500-600V / 3-Phase |
| CAPACITIES | up to 3000 USGPM 681 m ³ /hr up to 250 PSI (1724 kPa) Steam | | up to 10000 USGPM 2271 m ³ /hr up to 250 PSI (1724 kPa) Steam | up to 400 USGPM 91 m ³ /hr up to 150 lbs Steam | 150% for 60 sec. (HD), 120% for 60 sec. (ND) |
| PRESSURE | 150 PSI (1034 kPa) 250 PSI (1724 kPa) | | 300 PSI (2068 kPa) | 300 PSI (up to 2068 kPa) | |
| APPLICATIONS | Water, Glycol or Steam | | Water, Glycol or Steam | Water, Glycol or Steam | |
| TEMPERATURE | up to 300°F (144°C) | | up to 300°F (144°C) | up to 300°F (144°C) | |
| CONSTRUCTION MATERIAL | Carbon Steel or Stainless Steel with Stainless Steel Tubes | | Carbon Steel, Titanium and Stainless Steel. Other materials available | Titanium and Stainless Steel. Other materials available | |

| | | | | | |
|------------------------------|---|---|---|---|------------------------|
| |  |  |  |  | |
| SERIES | SEP | ADSR/AD | RDT/BT | RLU / RWU | RSE |
| SIMILAR TO | RL | 4900 | RDT: AX / OT / NTA / CAX / D BT: AL / NLA / CA / B / ST-DHW | | |
| TYPE | Vortex - Tangential Air Separator (With or Without Strainer) | In-Line Air/Dirt Separator (With Strainer) | Non Replaceable Bladder Expansion Tank Replaceable Bladder Exp. Tank (with bottom system connection) | Hot Water Storage Tank with Heater | Hot Water Storage Tank |
| CAPACITIES | 56 to 67000 USGPM (13 to 15217 m³/hr) | 69 to 12100 USGPM (16 to 2748 m³/hr) | 3 to 3962 Gallons (11 to 15000 litres) | 100 to 15000 Gallons (379 to 56781 litres) | |
| CONNECTIONS | 2" to 36" Diameter (50 mm to 914 mm) | 2" to 36" Diameter (50 mm to 914 mm) | 1" to 3" 25 mm to 75 mm | As Requested | |
| PRESSURE | up to 250PSI (1724 kPa) | up to 250PSI (1724 kPa) | up to 250PSI (1724 kPa) | up to 250PSI (1724 kPa) | |
| TEMPERATURE | up to 550°F (288°C) | up to 550°F (288°C) | up to 240°F (115°C) | up to 550°F (288°C) | |
| CONSTRUCTION MATERIAL | Carbon Steel or Stainless Steel | Carbon Steel or Stainless Steel | Carbon Steel EPDM | Carbon Steel or Stainless Steel | |

Quotation Requirement for Skid

What we need?

- 1.1 System PID
- 1.2 Pumps, Tanks and Heat Exchangers Schedule
- 1.3 Cut sheets for non Flo Fab parts such as Boilers, Chillers, etc...
- 1.4 Skids footprint
- 1.5 Mechanical room footprint
- 1.6 Control sequence details




Quality Control

All pumps are factory tested and certified performance test is available when requested by the consultant. Test facilities up to 400 HP with 27,000-gallon test bench with calibrated instruments.

Skid Advantages

- Solution for both: New construction and Retrofit.
- Easily add more modules for future expansion.
- One single point of Responsibility / Contact.
- One single submittal for approval vs. individual submittals for each component.
- Financial: Cost reduction. Effectively reduce total cost of ownership for all project stakeholders (Contractor / Consultant Engineer / End User)
- Financial: Space saving due to optimized space utilisation.
- Financial: Time (Cost) saving : Skid built in parallel during building construction, also.
- Financial: Cash flow
- Management: One single invoice / payment for all works
- Financial: Overhead savings, including project management, logistical coordination, insurance expense, etc.
- Financial: No surplus or extra components left after fabrication by contractor.
- Time (Cost) saving: No construction delay due to tested = site plug & play
- Safety: Avoid unpleasant site safety incidents and lost days as we tremendously minimize job site man-hours.

PID:



Production:



Package:





2.1 Heating and Cooling Systems

2.2 HC Module will be composed of two pumps, control panel VFD, expansion tank, air separator, chemical pot feeder, and glycol fill system (optional), balancing valves, isolation valves, air vents and drain connections, multifunction valves, suction diffusers or Y strainers, interconnecting black steel schedule 40 piping. All package components are mounted on a structural steel base with lifting lugs.

SPECS example:

| Product | Product Type | Section(s) | Date Submitted | Status |
|---------|---|-----------------------|----------------|--|
| XRI | Separately Coupled, Horizontally Mounted, In-Line Centrifugal Pumps | 232123-HYDRONIC PUMPS | 1/5/2016 | Submitted View Details |
| 880RI | Separately Coupled, Vertically Mounted, In-Line Centrifugal Pumps | 232123-HYDRONIC PUMPS | 1/5/2016 | Submitted View Details |
| 2000 | Separately Coupled, Base-Mounted, End-Suction Centrifugal Pumps | 232123-HYDRONIC PUMPS | 1/5/2016 | Submitted View Details |

Typical Mechanical Room

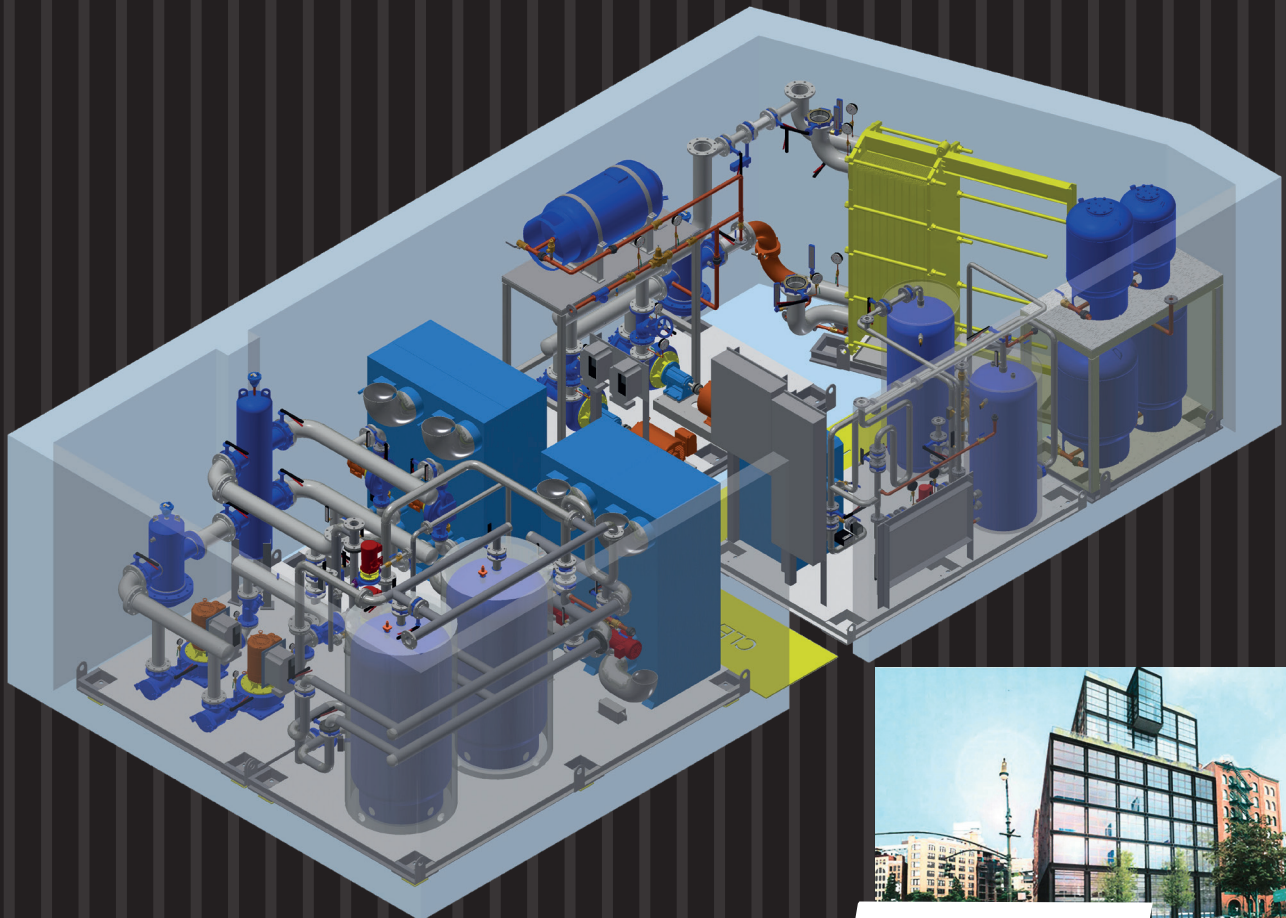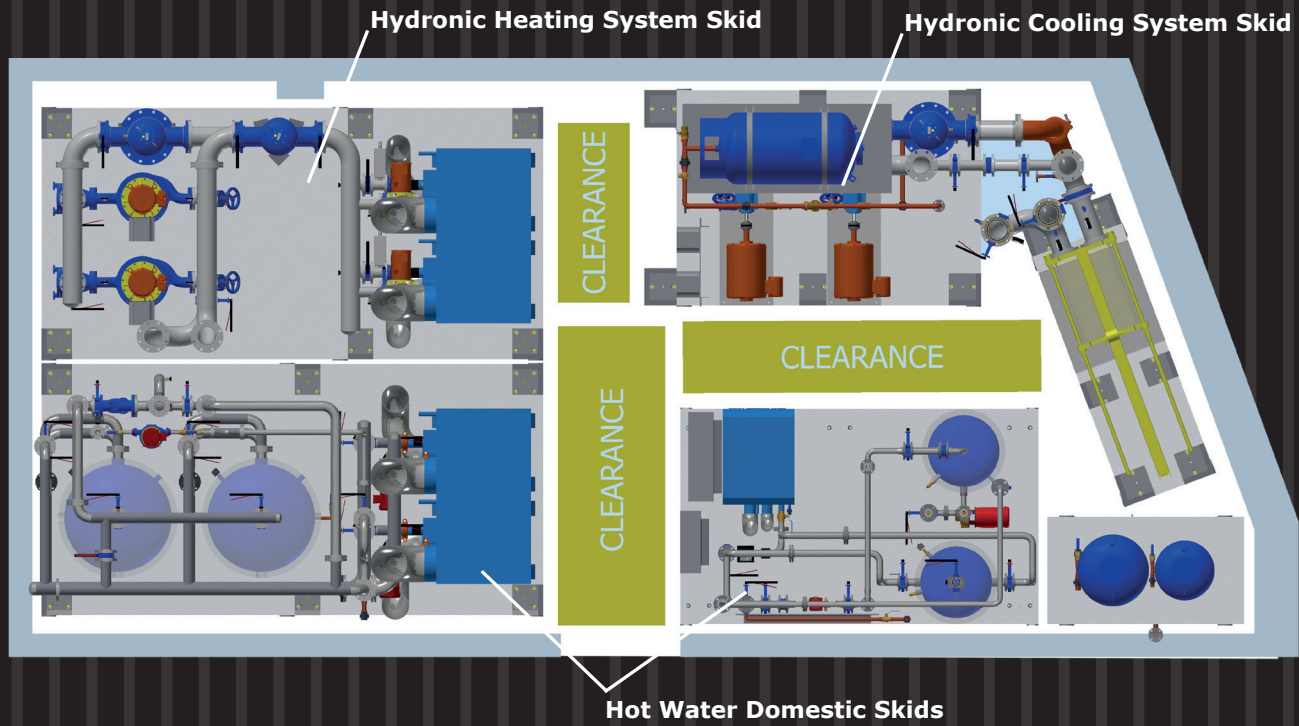

FLEXIBLE - ST

Material: Steel and Stainless Steel
 Pressure: 475 PSIG at 850°F with water
 Size Range: 1/2" to 2"
 Connections: Threaded




AIR VENT - MV

Material: Cast Iron
 Pressure: MV15 150 PSIG at 345°F
 MV15 300 PSIG at 400°F
 Size Range: 3/4"
 Connections: Threaded



PRESSURE AND OR TEMPERATURE PORTS

Material: Bronze
 Pressure: 1000 PSIG at 140°F
 Size Range: 1/4"
 Connections: SS2501: Threaded
 SS2511: Threaded Extended



UNION ARCH FLEXIBLE - DUT

Material: Steel Union and EPDM
 Pressure: 214 PSIG at 250°F with water
 Size Range: 1/2" to 12"
 Connections: Threaded Double



AIR VENT - AA

Material: Brass
 Pressure: 150 PSIG at 200°F
 Size Range: 1/8" and 1/4"
 Connections: Threaded



WAFER CHECK VALVE - LSDDB

Material: Cast Iron Body, Stainless Steel
 Disc, EPDM Seat
 Pressure: 175 PSIG at 225°F up to 12"
 150 PSIG at 250°F
 from 14" to 24"
 Size Range: 2" to 24"
 Body Style: Wafer



STANDARD FLANGED CONNECTOR - SM

Material: Steel and Stainless Steel
 Pressure: 125 PSIG at 450°F with water
 Size Range: 2" to 16"
 Body Style: Flanged



BUTTERFLY VALVE - BFVZ - L

Material: Cast Iron Body, Stainless Steel
 Disc, EPDM Seat
 Pressure: 175 PSIG at 225°F up to 12"
 150 PSIG at 250°F
 from 14" to 24"
 Size Range: 2" to 24"
 Body Style: Lug



SUCTION DIFFUSER - ASDFF

Material: Cast Iron Body, Stainless Steel Screen
 Pressure: 175 PSIG at 250°F with water
 200 PSIG at 150°F with steam
 Size Range: 2" to 20"
 Connections: Flanged



SINGLE ARCH FLEXIBLE - SSP & DSP

Material: Steel Flanged and EPDM
 Pressure: 214 PSIG at 240°F with water
 Size Range: 1 1/2" to 14"
 Connections: SSP Flanged Single
 DSP Flanged Double



MULTIFUNCTION VALVE - MFV

Material: Ductile Iron and Stainless Steel Disc
 Pressure: 150 PSIG at 225°F
 Size Range: 2" to 18"
 Connections: MFV-F: Flanged








2000 - FIXED BLADDER EXPANSION TANK

Capacities: 2 to 132 Gallons (8 to 528 liters)
 Pressure: up to 150PSI (1034kpa)
 Temperature: up to 200°F (93°C)
 Materials: Carbon Steel, Butyl




| | | | | | | |
|-------------------------------|---|---|---|------------------------------|---|--------------------------|
| |  |  |  | |  | |
| SERIES | LB-25, 40, 75, 215 & 315 | FS-237, 337 & 437, 475, 675, 4110, 6110, 8110 | LBV-40 | LBV-75, 215 & 315 | LBK-75 | LBK-215 & 315 |
| TYPE | Effluent Pump | Multi-Purpose Drainage Pump | Effluent & Sewage Vortex Pump | | Effluent | Sewage Non Clog Pump |
| CAPACITIES | up to 175 USGPM (40 m ³ /hr) | up to 1400 USGPM (317 m ³ /hr) | up to 159 USGPM (36 m ³ /hr) | | up to 185 USGPM (42 m ³ /hr) | |
| HEAD | 8 to 72 ft. (2.4 to 21.5 m) | 10 to 163 ft. (3 to 49 m) | 4 to 59 ft. (1.2 to 18m) | | 10 to 59 ft. (3 to 18m) | |
| SOLID SIZE | 3/8" (9 mm) | 3/4" (19 mm) | 3/4" (19mm) | 2" (50mm) | 3/4" (19mm) | 2" (50mm) |
| HORSEPOWER | up to 1 HP (0.75 kW) | up to 30 HP (22 kW) | up to 1 HP (0.75 kW) | | up to 1 HP (0.75 kW) | |
| DRIVES | Air Filled Electrical Motors Explosion Proof | Air Filled Electrical Motors Explosion Proof | Air Filled Electrical Motors Explosion Proof | | Air Filled Electrical Motors Explosion Proof | |
| APPLICATIONS | Water | Water | Water, Sewage & Waste Liquids | | Water | Water & Waste Liquids |
| TEMPERATURE | up to 200°F (94 °C) | up to 200°F (94 °C) | up to 200°F (94 °C) | | up to 200°F (94 °C) | |
| CONSTRUCTION MATERIALS | Cast Iron | Cast Iron and Stainless Steel | Cast Iron | | Cast Iron | |

| | | | | |
|------------------------------|---|---|--|---|
| |  |  |  |  |
| SERIES | FBV-332 | FBV-337 & 437 | FGC-015 / FGC-022 FGC-037 / FGC-055 | BAF |
| TYPE | Sewage Non Clog Pump | | Sewage Grinder Pump | Break Away Fitting |
| CAPACITIES | up to 317 USGPM 72 m ³ /hr | | up to 61 USGPM 14 m ³ /hr | |
| HEAD | 8 to 66ft (2.4 to 20 m) | | 17 to 105ft (5.2 to 32 m) | |
| SOLID SIZE | 2" (50 mm) | 3" (80 mm) | 3/4" (19 mm) | |
| HORSEPOWER | up to 5 HP (3.7 kW) | | up to 5 HP (3.7 kW) | |
| DRIVES | Air Filled Electrical Motors Explosion Proof | | Air Filled Electrical Motor Explosion Proof | |
| APPLICATIONS | Water, Sewage & Waste Liquids | | Water, Sewage & Waste Liquids | |
| TEMPERATURE | up to 200°F (94°C) | | up to 200°F (94°C) | |
| CONSTRUCTION MATERIAL | Cast Iron | | Cast Iron | Cast Iron |




| | |
|------------------------------|--|
| CAPACITIES | up to 30 USGPM (3.1 m ³ /hr) |
| HEAD | up to 692 ft. (300 PSI) (211 m) |
| PRESSURE | up to 300 PSI (2069 kPa) |
| HORSEPOWER | up to 10 HP (7.46 kW) |
| DRIVES | Electrical Motors |
| APPLICATIONS | Light Fuel Oil |
| TEMPERATURE | up to 150°F (65°C) |
| CONSTRUCTION MATERIAL | Bronze / Stainless Steel or Cast Iron |

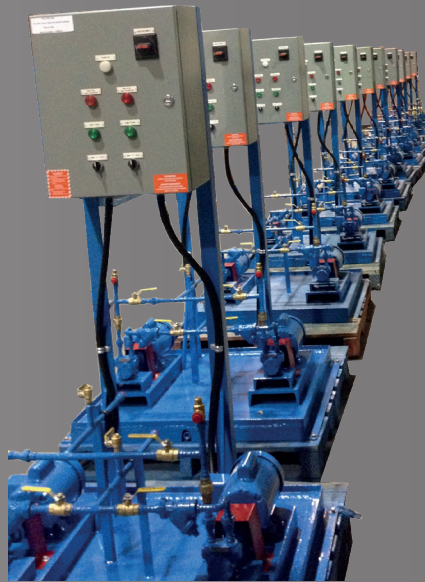

**Type: D-FOM
Duplex
Fuel Oil System**

| | |
|------------------------------|--|
| CAPACITIES | up to 12000 USGPM (2725 m ³ /hr) |
| HEAD | up to 692 ft. (300 PSI) (211 m) |
| PRESSURE | up to 300 PSI (2069 kPa) |
| HORSEPOWER | up to 400 HP (298.3 kW) |
| DRIVES | Electrical Motors |
| APPLICATIONS | Water / Glycol |
| TEMPERATURE | up to 300°F (144°C) |
| CONSTRUCTION MATERIAL | Bronze / Stainless Steel or Cast Iron |

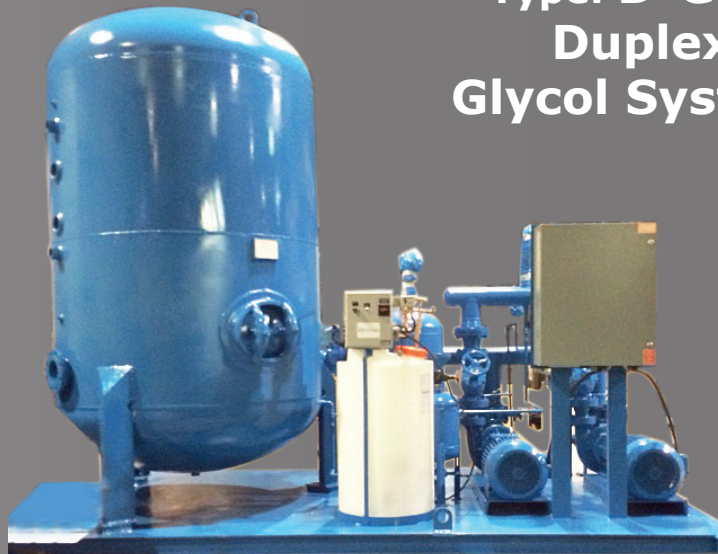


**Type: D-GLY
Duplex
Glycol System**

| | |
|------------------------------|--|
| CAPACITIES | up to 12000 USGPM (2725 m ³ /hr) |
| HEAD | up to 692ft. (300 PSI) (211 m) |
| PRESSURE | up to 300 PSI (2069 kPa) |
| HORSEPOWER | up to 400 HP (298.3 kW) |
| DRIVES | Electrical Motors |
| APPLICATIONS | Water / Glycol |
| TEMPERATURE | up to 300°F (144°C) |
| CONSTRUCTION MATERIAL | Bronze / Stainless Steel or Cast Iron |



**Type: D-HC-XRI
Duplex - Package**
Toronto, Canada

| | |
|------------------------------|--|
| CAPACITIES | up to 12000 USGPM (2725 m ³ /hr) |
| HEAD | up to 692 ft. (300 PSI) (211 m) |
| PRESSURE | up to 300 PSI (2069 kPa) |
| HORSEPOWER | up to 400 HP (298.3 kW) |
| DRIVES | Electrical Motors |
| APPLICATIONS | Water / Glycol |
| TEMPERATURE | up to 300°F (144°C) |
| CONSTRUCTION MATERIAL | Bronze / Stainless Steel or Cast Iron |

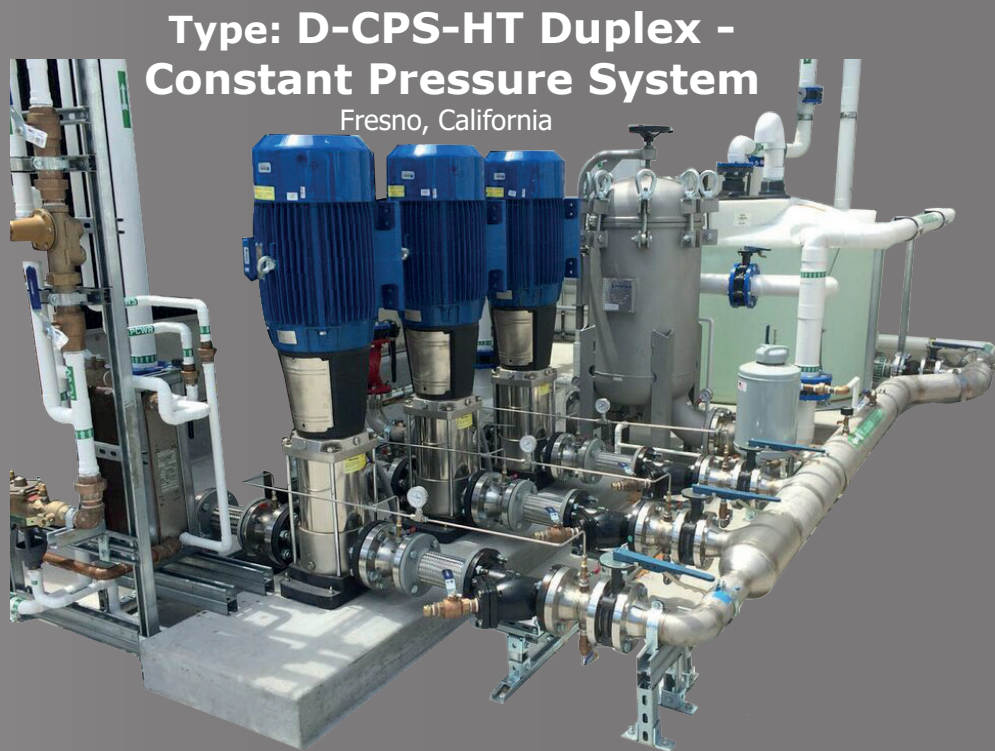

Type: D-CPS-HT Duplex - Constant Pressure System

Fresno, California

| | |
|------------------------------|--|
| CAPACITIES | up to 12000 USGPM (2725 m ³ /hr) |
| HEAD | up to 692 ft. (300 PSI) (211 m) |
| PRESSURE | up to 300 PSI (2069 kPa) |
| HORSEPOWER | up to 400 HP (298.3 kW) |
| DRIVES | Electrical Motors |
| APPLICATIONS | Water / Glycol |
| TEMPERATURE | up to 300°F (144°C) |
| CONSTRUCTION MATERIAL | Bronze / Stainless Steel or Cast Iron |

Type: BOI Boiler Package

San Francisco - California, USA



| | |
|------------------------------|--|
| CAPACITIES | up to 12000 USGPM (2725 m ³ /hr) |
| HEAD | up to 692 ft. (300 PSI) (211 m) |
| PRESSURE | up to 300 PSI (2069 kPa) |
| HORSEPOWER | up to 400 HP (298.3 kW) |
| DRIVES | Electrical Motors |
| APPLICATIONS | Water / Glycol |
| TEMPERATURE | up to 300°F (144°C) |
| CONSTRUCTION MATERIAL | Bronze / Stainless Steel or Cast Iron |

Type: CHI Chiller Package

Garden City - Texas, USA



| | |
|------------------------------|--|
| CAPACITIES | up to 12000 USGPM (2725 m ³ /hr) |
| HEAD | up to 692 ft. (300 PSI) (211 m) |
| PRESSURE | up to 300 PSI (2069 kPa) |
| HORSEPOWER | up to 400 HP (298.3 kW) |
| DRIVES | Electrical Motors |
| APPLICATIONS | Water / Glycol |
| TEMPERATURE | up to 300°F (144°C) |
| CONSTRUCTION MATERIAL | Bronze / Stainless Steel or Cast Iron |



**Type: LCOO
Large Cooling
Package**

Fort Bliss - Texas, USA

| | |
|------------------------------|--|
| CAPACITIES | up to 12000 USGPM (2725 m ³ /hr) |
| HEAD | up to 692 ft. (300PSI) (211 m) |
| PRESSURE | up to 300 PSI (2069 kPa) |
| HORSEPOWER | up to 400 HP (298.3 kW) |
| DRIVES | Electrical Motors |
| APPLICATIONS | Water / Glycol |
| TEMPERATURE | up to 300°F (144°C) |
| CONSTRUCTION MATERIAL | Bronze / Stainless Steel or Cast Iron |

**Type: HCE
Heating
Cooling with
Enclosure**


Michigan, USA



FLO FAB

Booster


Parts and Labour
Packages
8
Year warranty

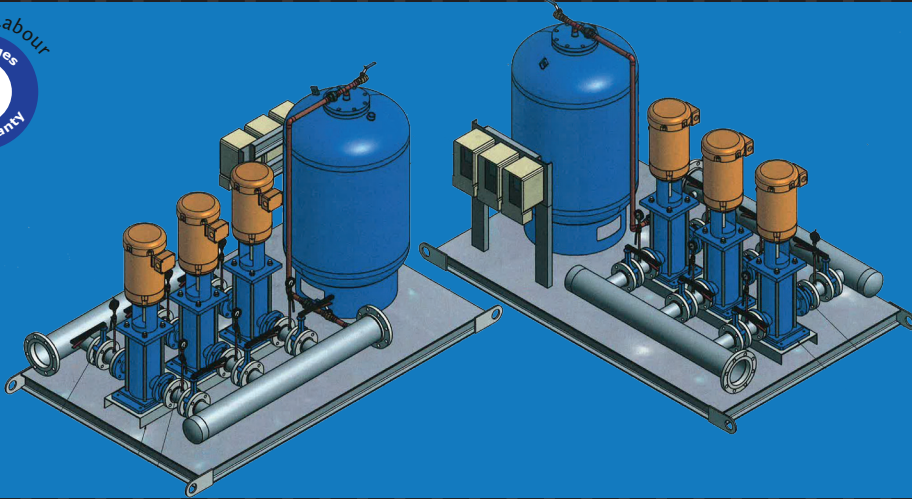

COGIR JAZZ ,
LONGUEIL, MONTREAL,

Heating or Cooling


Parts and Labour
Packages
8
Year warranty

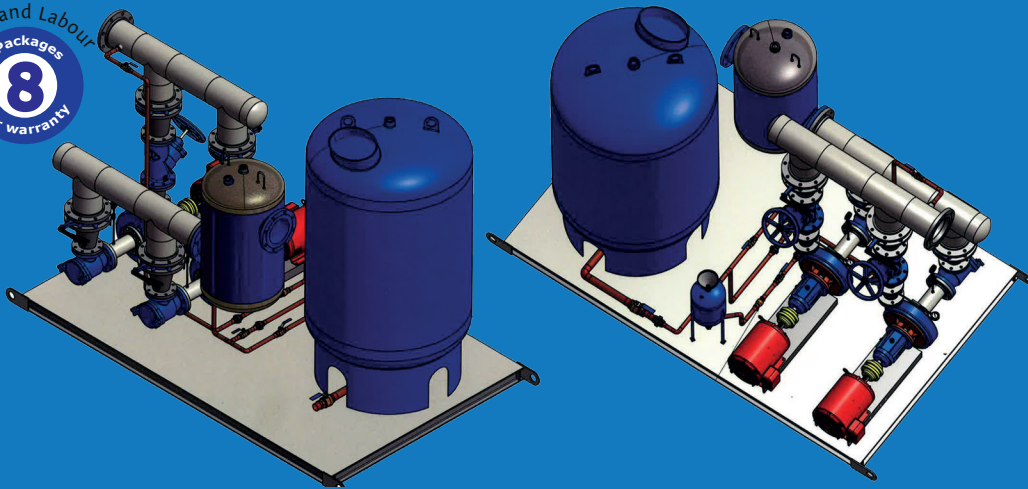

CONCORD GARDEN
RICHMOND, B.C., CA

Large Cooling

Parts and Labour
Packages
8
Year warranty

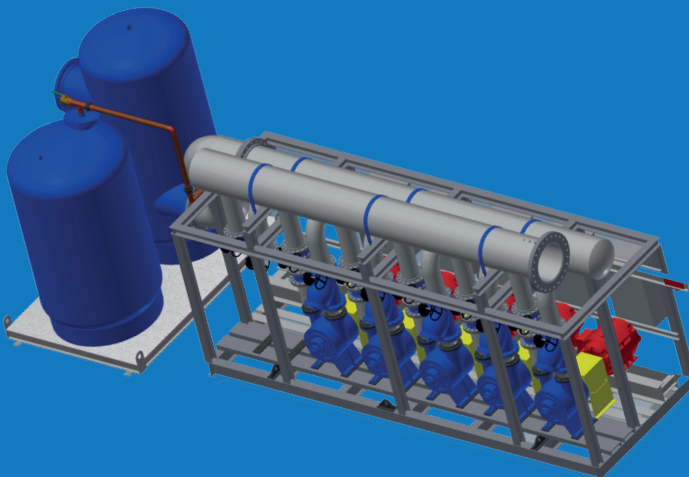


FORT BLISS HOSPITAL
EL PASO, TEXAS,
UNITED-STATES

Proud pump supplier for the New World Trade Center towers in New York


AND MORE

Heat Transfer

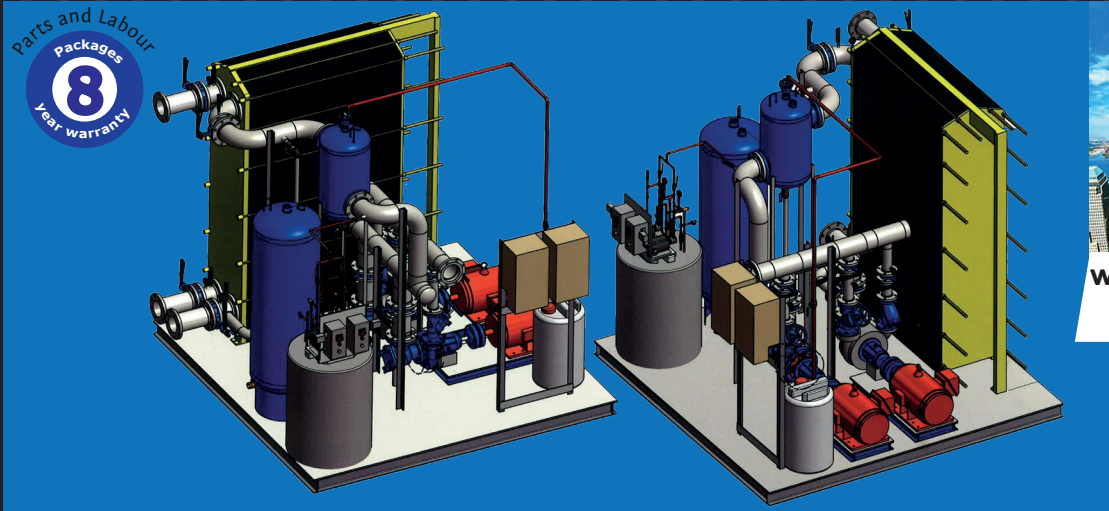


WORLD TRADE CENTER
NEW-YORK, U.S.A.

Duplex Pumps - Heating System

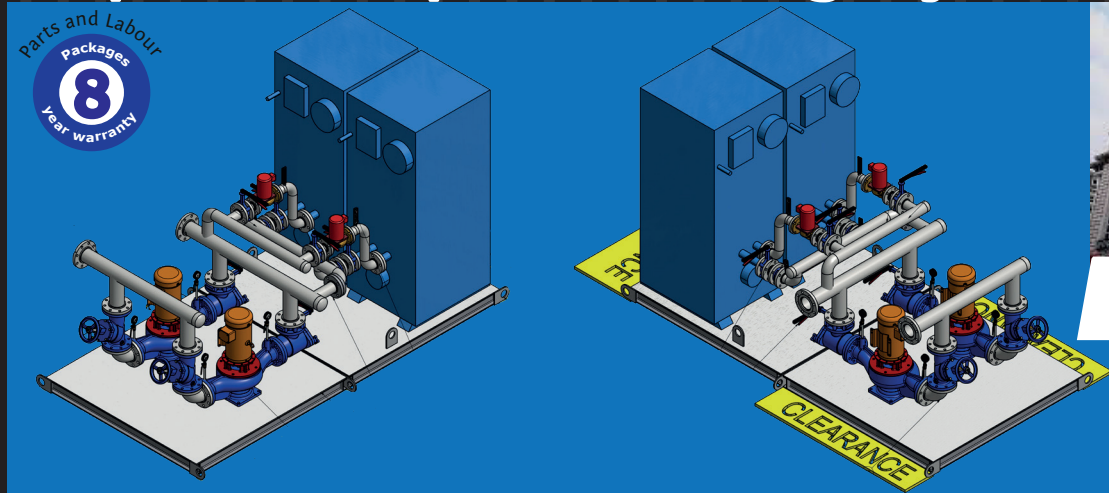

CRITERION HAGUE
NEW-YORK, U.S.A.
PHASE 1

Boiler Pack

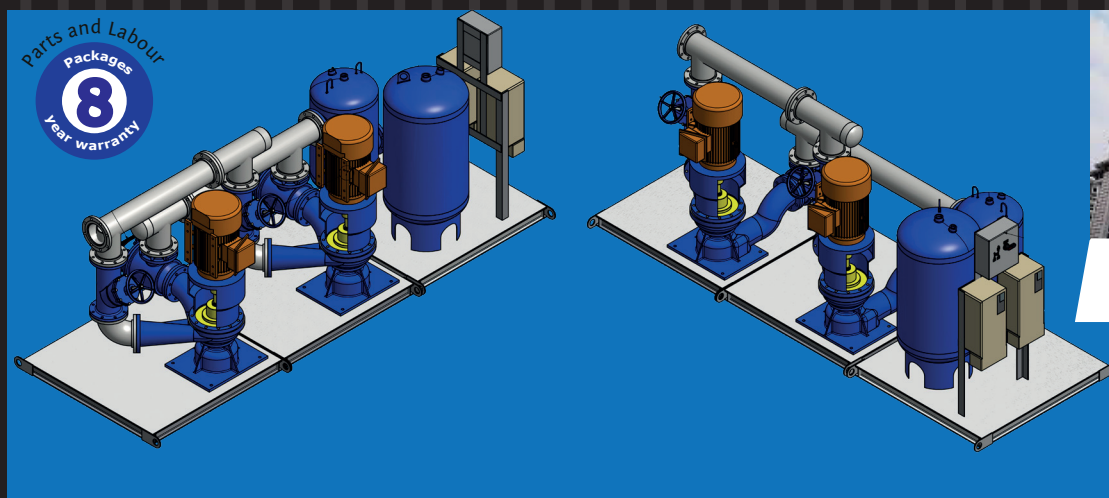

CRITERION
NEW-YORK, U.S.A.
PHASE 2

We are a proud supplier for the following completed and ongoing projects :



Zermatt Lodge

Salt Lake City, UT, U.S.A.
<https://zermattresort.com>



Pier 17 South Street Seaport

South Street, New York, U.S.A
www.southstreetseaport.com



Pearl-Qatar

Doha, Qatar
www.thepearlqatar.com



Museum of Science and Industry

Tampa, Florida
www.mosi.org

Eng : Advance System Engineering




Exchange Tower

Vancouver, B.C., Canada
www.theexchangebuilding.ca



Dar El Salam General Hospital

Cairo Governorate, Egypt




Brock University Center

St. Catharines, Ontario, Canada
<https://www.brocku.ca>



520 Park Avenue

New York, U.S.A
www.520parkavenue.com



Saudi Jeddah Port

Jeddah Saudi, Arabia
www.ports.gov.sa



St-Joseph Women's Hospital

Tampa, Florida
www.sjbhealth.org

Eng : Smith, Seckman,
 Reid Engineering



Millennium Hilton

New-York City, NY, U.S.A
www.hilton.com



Le M Lorraine

Lorraine, Quebec, Canada
www.lemlorraine.com



Morton Plant North Bay Hospital


New Port Richey, Florida
www.mortonplant.com

Eng : IC Thomasson
 Association Incorporated



Lowney

Montréal, Quebec, Canada
<http://lelowney.prevel.ca>



Sheepshead Residential Tower


Brooklyn, New York City, U.S.A.
<http://www.sheepsheadbites.com>

Sales and Service:

Quebec, Canada
 Tel. : 450 621-2995
 Fax : 450 621-4995

Lake Worth
 Florida, USA
 33467-5749

Toronto, Canada
 Tel. : 1 647 544-2995



www.flofab.com

SERVICE 24/7 : parts@flofab.com

