CLOSED COUPLED PUMPS

Series 1000

FLO FAB

Company profile

For the second s





Quebec Canada. It

has a convenient transportation on major highways and is approximately 20 kilometers north of the city of Montreal. Our company pays great attention to product quality and the construction of quality management system. Our factory has been in business for more than 40 years.

Our company has over 50 employees including, engineering, designers, R & D and quality control department. The products manufactured are strictly in accordance to standard and every pump is guaranteed to be tested and quali-

fied before being shipped. All tanks and heat exchangers are ASME certified and also tested before being release for shipment.



Our product range covers more than one thousand types over 15 series such as clear water supply, air conditioning, chemical, drainage, sewage handling, boiler feed, condensing, chilled water, heating pumps for municipal, power stations, chemical industry and new or existing buildings.

Our company is not only on track but finds out and designs with the new technology and new products, we

devote ourselves in

developing new pumping products especially in vertical inline pumps. In recent years we are the first to launch the ZDRI and XRI horizontal, vertical pumps to easy-disassemble these pumps while not removing the pump from the pipeline and also not removing the electric motor.

We will respond to our customers with new and excellent products.





General Data

Features Series 1000		2
reatures series 1000		2

Technical Data

Performance curves Series 1000 ------

3

General Data

Features Series 1000

Casing: Impeller/volute matching minimizes volute losses. The advanced impeller has been carefully matched by computerized design and testing to a volute of superior design. The matching of internal pressures and velocities improves hydraulic efficiency, allowing the impeller to produce its certified design flow and head, thus minimizing wasted horsepower. The volute design has four casing positions available. Gauge tapings make measuring pump pressure differential easy.

Mechanical Seal: Long-life mechanical seal is supplied with Viton elatometer, 303 stainless steel parts, carbon rotating washer and ceramic stationary seat. Pre-assembled on a bronze shaft sleeve to assure correct mechanical seal positioning and ease of servicing.

Shaft: Slip-fitted, pin-locked bronze shaft sleeve extending through seal box prevents shaft wear and corrosion. Elastometer gaskets seal both the shaft sleeve and the impeller cap screw to prevent shaft corrosion and isolate shaft from pumped liquid.

Impeller: New, unique 8-bladed impeller with vastly improved flow hydraulics stabilizes flow and reduces turbulence. Manufactured by Vacuum-cast foundry

Series 1000

Completely Assembled

Application: Heating, Air Conditioning and Industrial applications

Head: Up to 280 ft

Flow: Up to 1900 USGPM

Max. Working Pressure: 175 PSI Max. Working Temperature: 300°F

Construction Features:

 Standard is Cast Iron body, bronze impeller and wearing with steel shaft all pump sizes.

Options:

- Cast Iron body with 304 or 316 stainless steel impeller from 2x1x6 to 4x3x8.
- All 304 Stainless steel from 2x1x6 to 4x3x8.
- All Iron construction all sizes.
- Ductile Iron all sizes.

process that provides smooth waterways and dimensional control not found in sand casting.

Quick disconnect: Back pull-out design allows maintenance without disturbing the piping.

Features: Single stage end suction pump and double suction with a standard, stainless steel impeller making it a cost-effective solution. Stainless steel impellers have a superior efficiency and increased application coverage with larger pump sizes and the tougher, stainless steel impeller will last longer on the job no matter what liquid is applied.

The variety of liquids handled today has increased along with temperatures and pressures, which can add up to a shorter life span for a pump. This new option can withstand the chemicals commonly added to liquids today and the stainless steel is less likely to interact with those chemicals than similar bronze impellers.

Pumps are hydrostatically tested and data reports are recorded prior to shipping.

Technical Data

Flow (L/s) 94.6 100.9 113.6 126.2 50.5 56.8 63.1 18.2 31.5 25.2 37.9 44.2 12.6 0 150 18 110 100 19 20 90 22 80 70

15

Performance curves Series 1000

13


14


56

Head (ft)

60

50

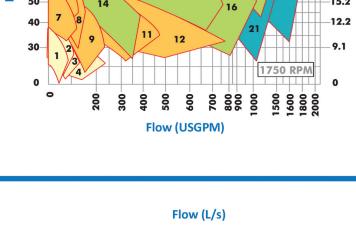

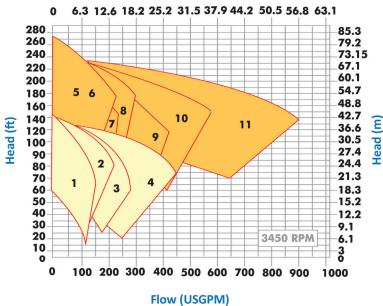

Pump Models and Sizes

45.7

33.5 30.5

27.4


24.4 21.3

15.2

17

<u></u>

Head (18.3

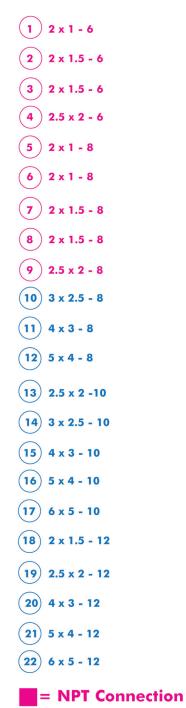


Some of our company's products









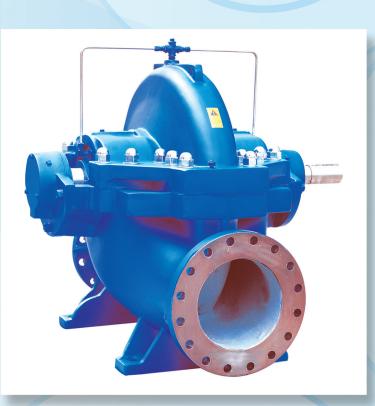



FLO FAB



We are also a proud pumps supplier for the following completed and ongoing projects:



James Haley VA Hospital

Tampa, Florida www.tampa.va.gov Eng: IC Thomasson Association Incorporated

Morton Plant North Bay Hospital

New Port Richey, Florida www.mortonplant.com Eng: IC Thomasson Association Incorporated





Palm Beach Gardens Medical Center - ER Expansion

Plam Beach Gardens, Florida www.pbgmc.com Eng: IC Thomasson Association Incorporated

Museum of Science and Industry

Tampa, Florida www.mosi.org Eng: Advanced Systems Engineering





St-Joseph's Women's Hospital

Tampa, Florida www.sjbhealth.org Eng: Smith, Seckman, Reid Engineering

FLO FAB Inc.

Lake Worth Florida

33467-5749

USA

USA

860 Industriel Blvd Bois-des-Filion, Quebec J6Z 4V7 Canada Tel.: (450) 621-2995 Fax: (450) 621-4995

CANADA

www.flofab.com