

End Suction Centrifugal/ Stainless Steel

> PST & PSF



HISTORY

Flo Fab was established in 1981 by Denis Gauvreau who created and developed the products line and constantly being perfected by Marc Gauvreau, as well as by a team of professional engineers and designers. It's a combination of existing designs from several renowned products and the innovative ideas of a new generation professionals.

Through the years, Flo Fab has acquired several companies and service entities including: AQUA-PROFAB (ASME Tanks manufacturer), MÉNARD, LÉONARD ÉLECTRIQUE, PMA., Furthermore Flo Fab purchased equipment, fabrication designs and patterns from IDEALCO, a manufacturer of shell and tube type heat exchangers.

The after sales services, sales, engineering, R&D, production, quality control, accounting and administration departments of all the above companies share the same location.

In December 2014, Marc Gauvreau, son of the founder, acquired all shares of The company. Flo Fab and is constantly investing in new state of the art innovations new product like the XRI series and Prefab Skid for Hydronic Hearing 8 cooling system, pumping systems. This has allowed Flo Fab to retain competent and experienced staff of professionals with varied and specialized abilities that constantly work on improving our existing products and add new engineered solutions that exceeding customer's expectations .

Flo Fab has grown quite rapidly and now proudly offers of a wide range of products available directly from one manufacturer. This includes pumps & pump packages, tanks, heat exchangers & hydronic accessories. This allows each project stakeholders to enjoy economical savings, peace of mind, best value for their investment and optimized total cost of ownership.





Features

Model **PST / PSF** Close coupled design saves space; simplifies maintenance and installation

- Stainless steel liquid end components high quality; corrosion resistance
- Versatile mounting can be installed horizontally or venically
- Back pullout construction assembly and overhaul of the impeller and seal without distorting suction and discharge connections
- Top centerline discharge and toot support under casing ensures sell-venting and reduces misalignment from pipe loads
- High operating efficiency lowers operating costs
- High quality mechanical shalt seals and o-rings available for standard pumping requirements or optional high temperature and chemical duty operation

Applications

- Plant services
- Water supply systems
- Washing plants
- Cooling water
- Car wash
- Scrubbers
- Ultrapure water systems
- Jockey pump services
- Air conditioning
- Sprinkler/flow irrigation
- OEM equipment application

- Pressure boosting
- Liquid transfer
- Heat exchanger
- Spray systems
- Heating
- Beverage processing
- Pharmaceutical services
- Water reclamation and treatment
- General pump applications




SERIES PS Specifications MODEL - PST

	Standard	Optional
Size		
Suction	PST70: 11/4" NPT thread PST120: 11/4" NPT thread PST200: 11/2" NPT thread	
Discharge	1" NPT thread	
H.P. Range	1/2 H.P. to 3 H.P.	
Performance Range		
Capacity	5.5 to 90 GPM at 3450 R.P.M.	
Head	23 to 144 feet at 3450 R.P.M	
Liquid Handling		
Liquid Type	Various	
Temperature	Dependent on Mechanical Seal Selection	
Working Pressure	Max. 115 P.S.I.G. (8 Bar)	
Materials		
Casing	304 Stainless Steel	
Impeller (Closed Type)	304 Stainless Steel	
Shaft	Stainless Steel	
Bracket	Aluminum	
Mechanical Seal	Carbon vs. Ceramic (Buna Elastomers)	Various material options for high temperature, corrosive, and abrasive services
Direction of Rotation	Clockwise when viewed from motor end	
Motor		
Туре	NEMA 56J Frame	 Explosion Proof
Speed	60Hz 3450 RPM (2 poles)	•1750 RPM for lower flows and
Single Phase	TEFC: ½ H.P. to 3 H.P. ODP: ½ H.P. to 3 H.P. 115/230V	pressures
Three Phase	TEFC: 1/2 H.P. to 3 H.P. ODP: 1/2 H.P. to 3 H.P. 208-230/460V and 575V	
Motor Protection	Single Phase: Built-in overload protection	
	Three Phase: Overload protection must be provided	



SERIES PS Cross Section MODEL - PST Close-coupled

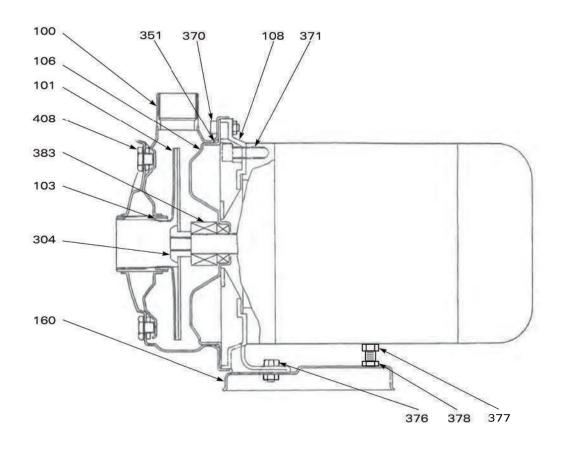


ITEM	QTY REQ'D	DESCRIPTION	MATERIAL
100	1	Casing	304 Stainless steel
101	1	Impeller	304 Stainless steel
103*	1	Casing ring	Viton
106	1	Casing cover	304 Stainless steel
108	1	Adapter	Aluminum
160	1	Motor support	Steel
304	4	Impeller nut	304 Stainless steel
351	1	Casing O-ring	Viton (standard)
370	8	Casing bolt	304 Stainless steel
371	4	Motor bolt	Steel
376	2	Foot bolt	Steel
377	1	Support bolt	Steel
378	1	Support bolt nut	Steel
383	1	Mechanical seal	Various
408	2	Casing plug	304 Stainless steel

^{*} Required on sizes 701, 703 and 705 only.



SERIES PS Cross Section MODEL - PST Frame mounted

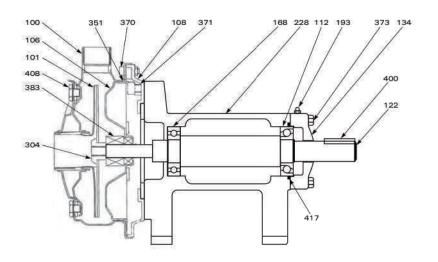


TEM	QTY REQ'D	DESCRIPTION	MATERIAL
100	1	Casing	304 Stainless steel
101	1	Impeller	304 Stainless steel
103*	1	Casing wear ring	Viton
106	71	Casing cover	304 Stainless steel
108	1	Adapter	Aluminum
112	1	Thrust bearing	Steel
122	1	Shaft	Steel
134	1	Outboard brg cap	Cast iron
168	7813	Radial bearing	Steel
178	112	Impeller key	Steel
193	1	Grease fitting	Steel
228	1	Bearing frame	Cast iron
304	1	Impeller nut	304 Stainless steel
351	1	Casing o-ring	Viton (standard)
370	8	Casing bolt	304 Stainless steel
371	4	Frame bolt	Steel
373	4	Bearing cap bolt	Steel
383	1	Mechanical seal	Various
400	1	Shaft key	Steel
408	2	Casing plug	304 Stainless steel
417	1	Retaining ring	Steel

^{*} Required on sizes 701, 703 and 705 only.




SERIES PS Specifications MODEL - PST

Model PST Selection Chart (1725 RPM)

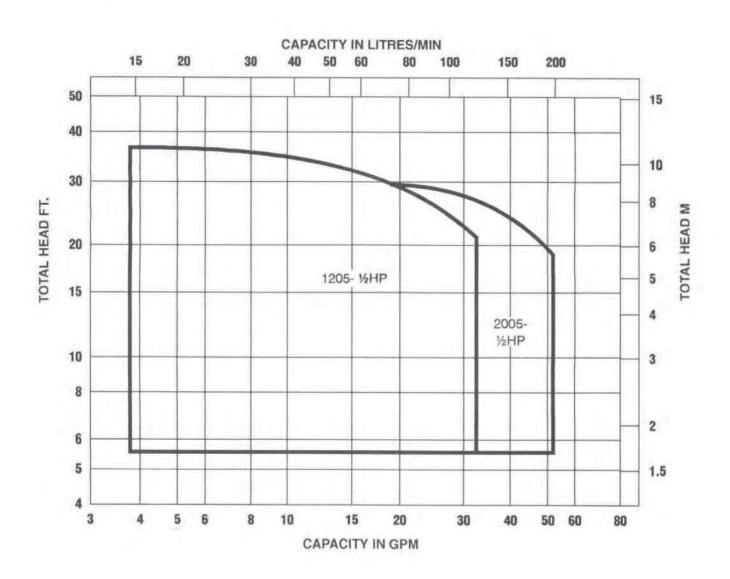




CUSTOMER			REFERENCE _	
FLUID	S.G	TEMP	CAPACITY	TDH
CEPTIEIEN:		DA	TE:	

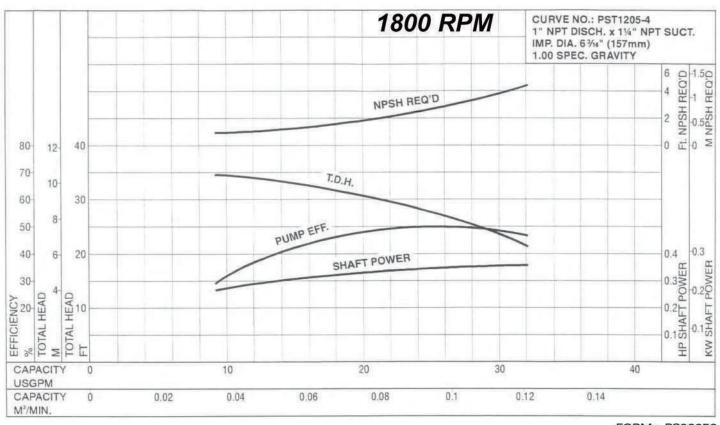

FORM - PS00050 January 03



CUSTOMER			REFERENCE _	
FLUID	s.g	TEMP	CAPACITY	TDH
CERTIFIED:		DA.	TE:	

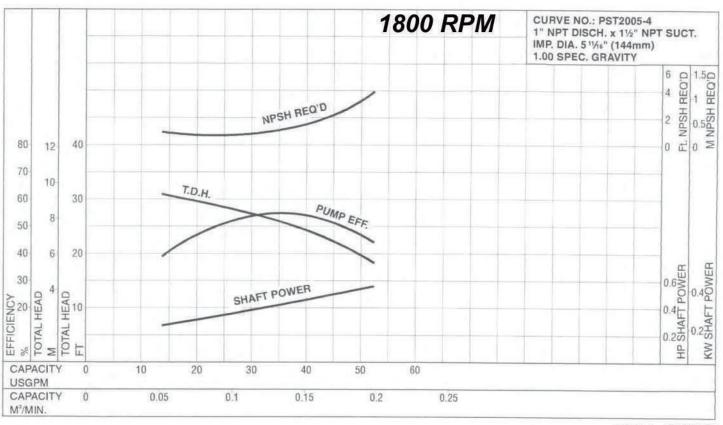


FORM - PS00060 January 03



SERIES PS Specifications MODEL - PST



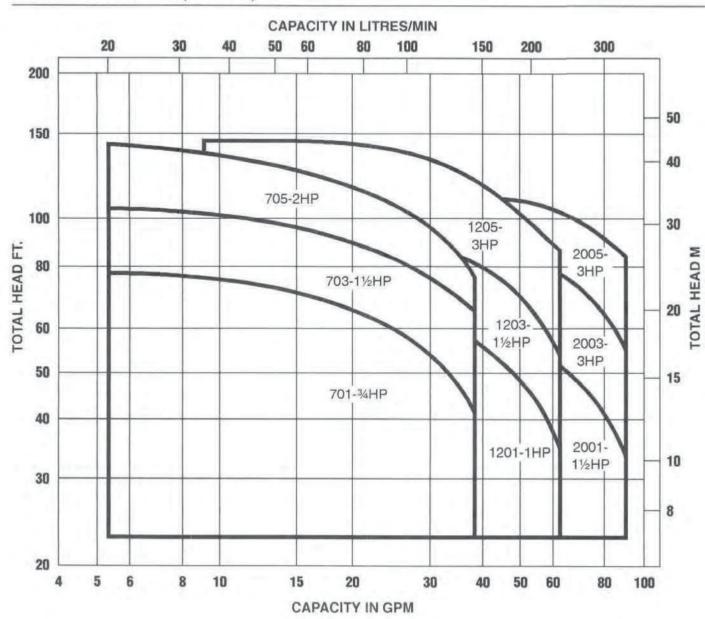




CERTIFIED:			TE:	
FLUID	S.G	TEMP	CAPACITY	TDH
CUSTOMER			REFERENCE	



FORM - PS00080 January 03




CUSTOMER			REFERENCE _	
FLUID	8.G	TEMP	CAPACITY	TDH
CERTIFIED:		DA	TE:	

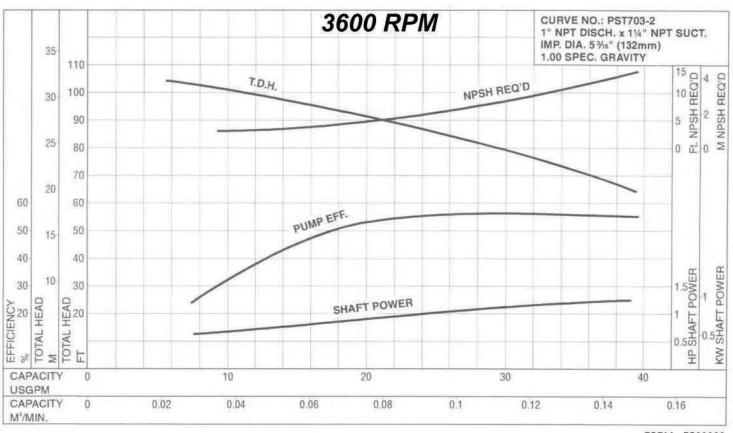

FORM - PS00090 January 03




CUSTOMER			REFERENCE	
FLUID	S.G	TEMP	CAPACITY	TDH
CERTIFIED:		DAT	·F·	

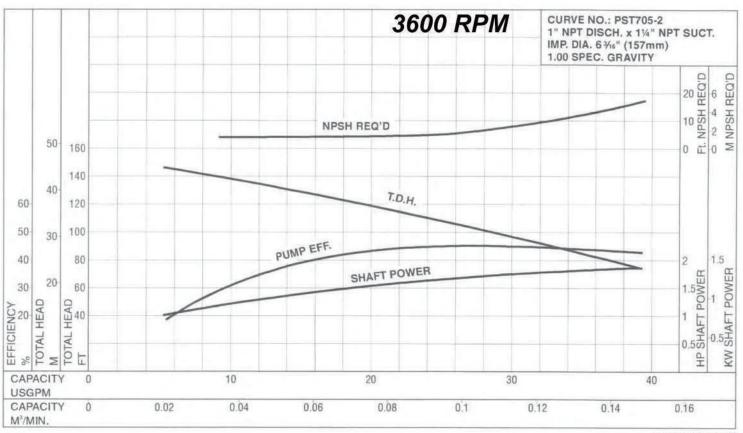

FORM - PS00100 January 03



CUSTOMER	II LOCKEDO	Vicinitization .	REFERENCE	Spotatorica
FLUID	S.G	TEMP	CAPACITY	TDH
CERTIFIED:		DA	TE:	

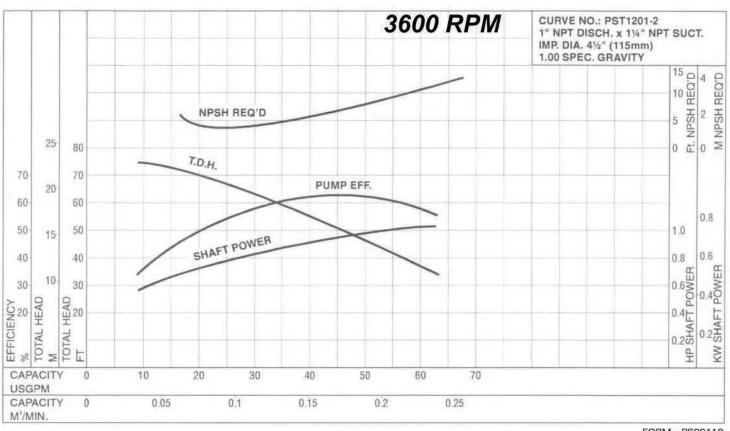

FORM - PS00110 January 03



CUSTOMER			REFERENCE	
FLUID	S.G.	TEMP	CAPACITY	TDH
CERTIFIED:		DA	TE:	



January 03






FORM - PS00130 January 03




CUSTOMER			REFERENCE _	j
FLUID	S.G	TEMP	CAPACITY	TDH
CERTIFIED:		DA	TE:	

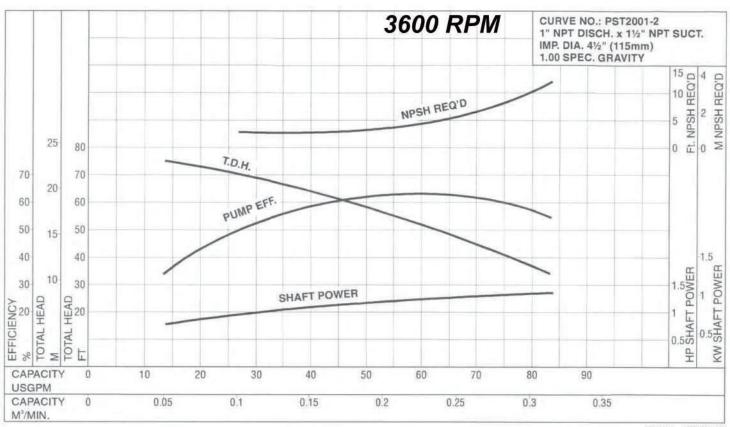

FORM - PS00140 January 03




CUSTOMER			_ REFERENCE _	
FLUID	S.G	TEMP	CAPACITY	TDH
CERTIFIED:		DAT	rE:	

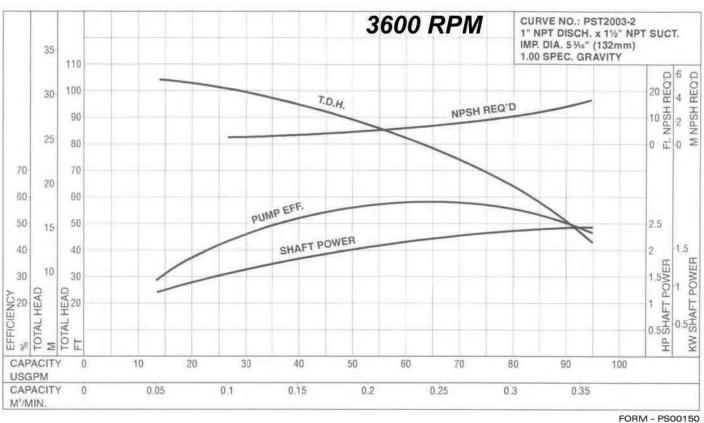

ORM - PS00150 January 03




CUSTOMER			REFERENCE _		-
FLUID	S.G	TEMP	CAPACITY	TDH	£
CERTIFIED:		DA	TE:		

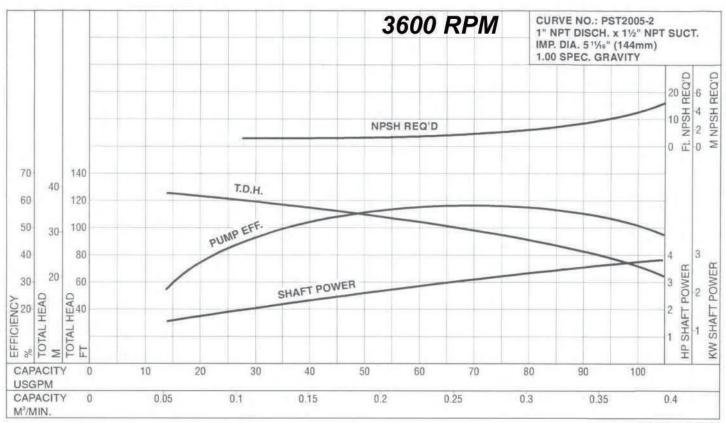


FORM - PS00160 January 03



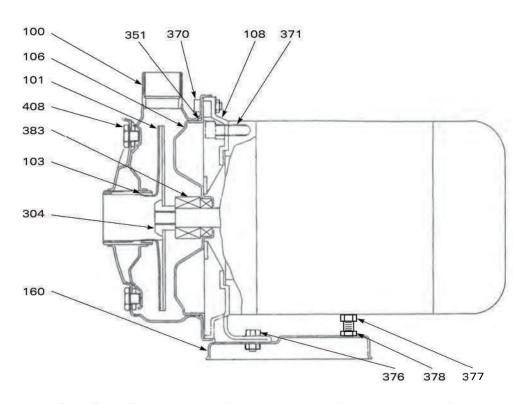


ITEM	QTY REQ'D	DESCRIPTION	MATERIAL	PART NUMBER
100	1	Casing	304 Stainless steel	E-251402230
101	1	Impeller	304 Stainless steel	E-251450785
103	1	Casing ring	Viton	E-255402064
106	1	Casing cover	304 Stainless steel	E-251438016
108	1	Adapter	Aluminum	E-340280085
160	1	Motor support	Steel	E-371472072
304	1	Impeller nut	304 Stainless steel	E-363396101
351	1	Casing o-ring	Viton (standard)	E-165X3V
			Buna (optional)	E-165X3B
370	8	Casing bolt	304 Stainless steel	E-M6X16HH
371	4	Motor bolt	Steel	E-3/8-16X3/4SH
376	2	Foot bolt	Steel	E-M8X16HH
377	1	Support bolt	Steel	E-M8X45HH
378	1	Support bolt nut	Steel	E-M8HN
383	1	Mechanical seal	Carbon/Ceramic/Buna	S10-2021-ABN
			Carbon/Ceramic/Viton	S10-2021-AVT
			Carbon/S.S./EPR	S10-2021-CEP
			Carbon/Carbide/Viton	S10-2021-BVT
			Carbide/Carbide/Viton	S10-2021-EVT
408	2	Casing plug	304 Stainless steel	375132107



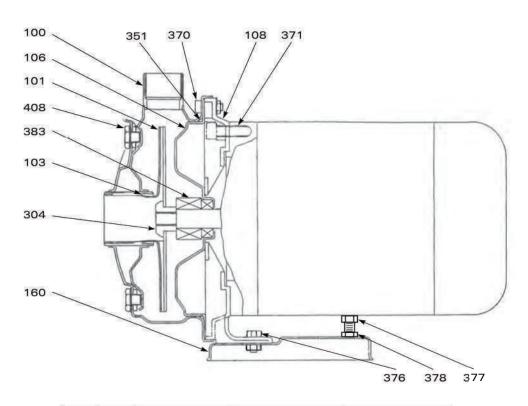


ITEM	QTY REQ'D	DESCRIPTION	MATERIAL	PART NUMBER
100	1	Casing	304 Stainless steel	E-251402230
101	1	Impeller	304 Stainless steel	E-251450786
103	1	Casing ring	Viton	E-255402064
106	1	Casing cover	304 Stainless steel	E-251438016
108	1	Adapter	Aluminum	E-340280085
160	1	Motor support	Steel	E-371472072
304	1	Impeller nut	304 Stainless steel	E-363396101
351	1	Casing o-ring	Viton (standard)	E-165X3V
			Buna (optional)	E-165X3B
370	8	Casing bolt	304 Stainless steel	E-M6X16HH
371	4	Motor bolt	Steel	E-3/8-16X3/4SH
376	2	Foot bolt	Steel	E-M8X16HH
377	1	Support bolt	Steel	E-M8X45HH
378	1	Support bolt nut	Steel	E-M8HN
383	1	Mechanical seal	Carbon/Ceramic/Buna	S10-2021-ABN
			Carbon/Ceramic/Viton	S10-2021-AVT
			Carbon/S.S./EPR	S10-2021-CEP
			Carbon/Carbide/Viton	S10-2021-BVT
			Carbide/Carbide/Viton	S10-2021-EVT
408	2	Casing plug	304 Stainless steel	375132107



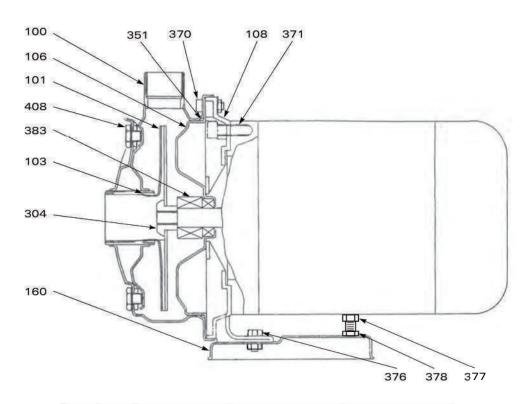


ITEM	QTY REQ'D	DESCRIPTION	MATERIAL	PART NUMBER
100	1	Casing	304 Stainless steel	E-251402230
101	1	Impeller	304 Stainless steel	E-251450787
103	1	Casing ring	Viton	E-255402064
106	1	Casing cover	304 Stainless steel	E-251438016
108	1	Adapter	Aluminum	E-340280085
160	1	Motor support	Steel	E-371472072
304	1	Impeller nut	304 Stainless steel	E-363396101
351	1	Casing o-ring	Viton (standard)	E-165X3V
			Buna (optional)	E-165X3B
370	8	Casing bolt	304 Stainless steel	E-M6X16HH
371	4	Motor bolt	Steel	E-3/8-16X3/4SH
376	2	Foot bolt	Steel	E-M8X16HH
377	1	Support bolt	Steel	E-M8X45HH
378	1	Support bolt nut	Steel	E-M8HN
383	1	Mechanical seal	Carbon/Ceramic/Buna	S10-2021-ABN
			Carbon/Ceramic/Viton	S10-2021-AVT
			Carbon/S.S./EPR	S10-2021-CEP
			Carbon/Carbide/Viton	S10-2021-BVT
			Carbide/Carbide/Viton	S10-2021-EVT
408	2	Casing plug	304 Stainless steel	375132107



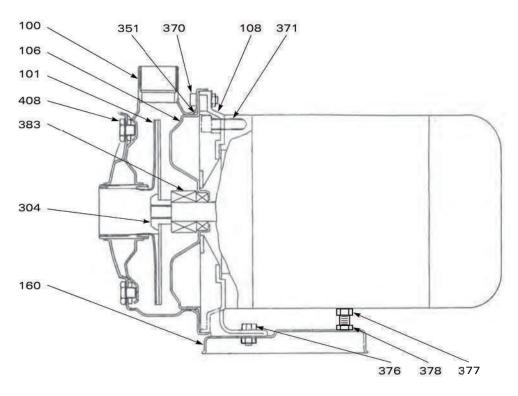


ITEM	QTY REQ'D	DESCRIPTION	MATERIAL	PART NUMBER
100	1	Casing	304 Stainless steel	E-251402231
101	1	Impeller	304 Stainless steel	E-251450788
106	1	Casing cover	304 Stainless steel	E-251438016
108	1	Adapter	Aluminum	E-340280085
160	1	Motor support	Steel	E-371472072
304	1	Impeller nut	304 Stainless steel	E-363396101
351	1	Casing o-ring	Viton (standard)	E-165X3V
			Buna (optional)	E-165X3B
370	8	Casing bolt	304 Stainless steel	E-M6X16HH
371	4	Motor bolt	Steel	E-3/8-16X3/4SH
376	2	Foot bolt	Steel	E-M8X16HH
377	1	Support bolt	Steel	E-M8X45HH
378	1	Support bolt nut	Steel	E-M8HN
383	1	Mechanical seal	Carbon/Ceramic/Buna	S10-2021-ABN
			Carbon/Ceramic/Viton	S10-2021-AVT
			Carbon/S.S./EPR	S10-2021-CEP
			Carbon/Carbide/Viton	S10-2021-BVT
			Carbide/Carbide/Viton	S10-2021-EVT
408	2	Casing plug	304 Stainless steel	375132107



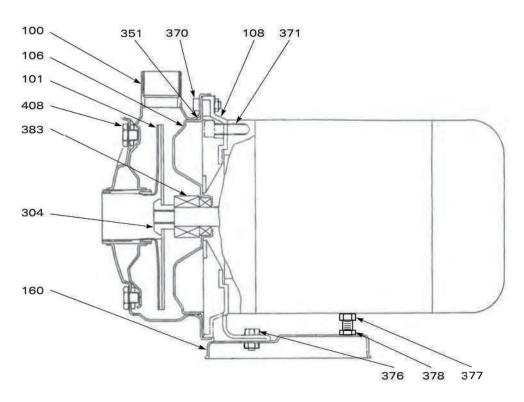


ITEM	QTY REQ'D	DESCRIPTION	MATERIAL	PART NUMBER
100	1	Casing	304 Stainless steel	E-251402231
101	1	Impeller	304 Stainless steel	E-251450789
106	1	Casing cover	304 Stainless steel	E-251438016
108	1	Adapter	Aluminum	E-340280085
160	1	Motor support	Steel	E-371472072
304	1	Impeller nut	304 Stainless steel	E-363396101
351	1	Casing o-ring	Viton (standard)	E-165X3V
			Buna (optional)	E-165X3B
370	8	Casing bolt	304 Stainless steel	E-M6X16HH
371	4	Motor bolt	Steel	E-3/8-16X3/4SH
376	2	Foot bolt	Steel	E-M8X16HH
377	1	Support bolt	Steel	E-M8X45HH
378	1	Support bolt nut	Steel	E-M8HN
383	1	Mechanical seal	Carbon/Ceramic/Buna	S10-2021-ABN
			Carbon/Ceramic/Viton	S10-2021-AVT
			Carbon/S.S./EPR	S10-2021-CEP
			Carbon/Carbide/Viton	S10-2021-BVT
			Carbide/Carbide/Viton	S10-2021-EVT
408	2	Casing plug	304 Stainless steel	375132107



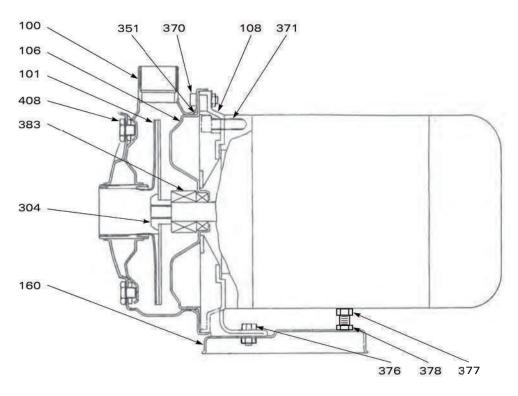


ITEM	QTY REQ'D	DESCRIPTION	MATERIAL	PART NUMBER
100	1	Casing	304 Stainless steel	E-251420086
101	1	Impeller	304 Stainless steel	E-251450790
106	1	Casing cover	304 Stainless steel	E-251438016
108	1	Adapter	Aluminum	E-340280085
160	1	Motor support	Steel	E-371472072
304	1	Impeller nut	304 Stainless steel	E-363396101
351	1	Casing o-ring	Viton (standard)	E-165X3V
			Buna (optional)	E-165X3B
370	8	Casing bolt	304 Stainless steel	E-M6X16HH
371	4	Motor bolt	Steel	E-3/8-16X3/4SH
376	2	Foot bolt	Steel	E-M8X16HH
377	1	Support bolt	Steel	E-M8X45HH
378	1	Support bolt nut	Steel	E-M8HN
383	1	Mechanical seal	Carbon/Ceramic/Buna	S10-2021-ABN
			Carbon/Ceramic/Viton	S10-2021-AVT
			Carbon/S.S./EPR	S10-2021-CEP
			Carbon/Carbide/Viton	S10-2021-BVT
			Carbide/Carbide/Viton	S10-2021-EVT
408	2	Casing plug	304 Stainless steel	375132107



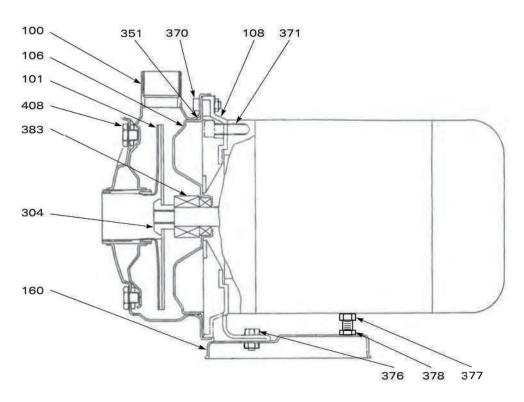


ITEM	QTY REQ'D	DESCRIPTION	MATERIAL	PART NUMBER
100	1	Casing	304 Stainless steel	E-251420087
101	1	Impeller	304 Stainless steel	E-251450791
106	1	Casing cover	304 Stainless steel	E-251438016
108	1	Adapter	Aluminum	E-340280085
160	1	Motor support	Steel	E-371472072
304	1	Impeller nut	304 Stainless steel	E-363396101
351	1	Casing o-ring	Viton (standard)	E-165X3V
			Buna (optional)	E-165X3B
370	8	Casing bolt	304 Stainless steel	E-M6X16HH
371	4	Motor bolt	Steel	E-3/8-16X3/4SH
376	2	Foot bolt	Steel	E-M8X16HH
377	1	Support bolt	Steel	E-M8X45HH
378	1	Support bolt nut	Steel	E-M8HN
383	1	Mechanical seal	Carbon/Ceramic/Buna	S10-2021-ABN
			Carbon/Ceramic/Viton	S10-2021-AVT
			Carbon/S.S./EPR	S10-2021-CEP
			Carbon/Carbide/Viton	S10-2021-BVT
			Carbide/Carbide/Viton	S10-2021-EVT
408	2	Casing plug	304 Stainless steel	375132107



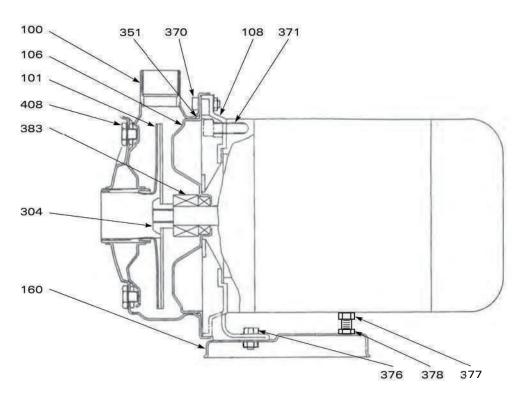

ITEM	QTY REQ'D	DESCRIPTION	MATERIAL	PART NUMBER
100	1	Casing	304 Stainless steel	E-251420087
101	1	Impeller	304 Stainless steel	E-251450792
106	1	Casing cover	304 Stainless steel	E-251438016
108	1	Adapter	Aluminum	E-340280085
160	1	Motor support	Steel	E-371472072
304	1	Impeller nut	304 Stainless steel	E-363396101
351	1	Casing o-ring	Viton (standard)	E-165X3V
			Buna (optional)	E-165X3B
370	8	Casing bolt	304 Stainless steel	E-M6X16HH
371	4	Motor bolt	Steel	E-3/8-16X3/4SH
376	2	Foot bolt	Steel	E-M8X16HH
377	1	Support bolt	Steel	E-M8X45HH
378	1	Support bolt nut	Steel	E-M8HN
383	1	Mechanical seal	Carbon/Ceramic/Buna	S10-2021-ABN
			Carbon/Ceramic/Viton	S10-2021-AVT
			Carbon/S.S./EPR	S10-2021-CEP
			Carbon/Carbide/Viton	S10-2021-BVT
			Carbide/Carbide/Viton	S10-2021-EVT
408	2	Casing plug	304 Stainless steel	375132107




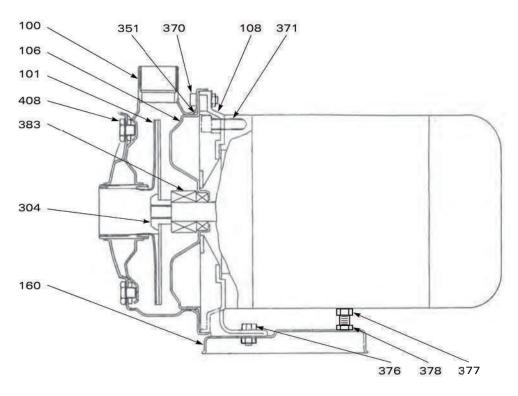

ITEM	QTY REQ'D	DESCRIPTION	MATERIAL	PART NUMBER
100	1	Casing	304 Stainless steel	E-251420087
101	1	Impeller	304 Stainless steel	E-251450793
106	1	Casing cover	304 Stainless steel	E-251438016
108	1	Adapter	Aluminum	E-340280085
160	1	Motor support	Steel	E-371472072
304	1	Impeller nut	304 Stainless steel	E-363396101
351	1	Casing o-ring	Viton (standard)	E-165X3V
			Buna (optional)	E-165X3B
370	8	Casing bolt	304 Stainless steel	E-M6X16HH
371	4	Motor bolt	Steel	E-3/8-16X3/4SH
376	2	Foot bolt	Steel	E-M8X16HH
377	1	Support bolt	Steel	E-M8X45HH
378	1	Support bolt nut	Steel	E-M8HN
383	1	Mechanical seal	Carbon/Ceramic/Buna	S10-2021-ABN
			Carbon/Ceramic/Viton	S10-2021-AVT
			Carbon/S.S./EPR	S10-2021-CEP
			Carbon/Carbide/Viton	S10-2021-BVT
			Carbide/Carbide/Viton	S10-2021-EVT
408	2	Casing plug	304 Stainless steel	375132107



SERIES PS Dimensional Outline MODEL - PST

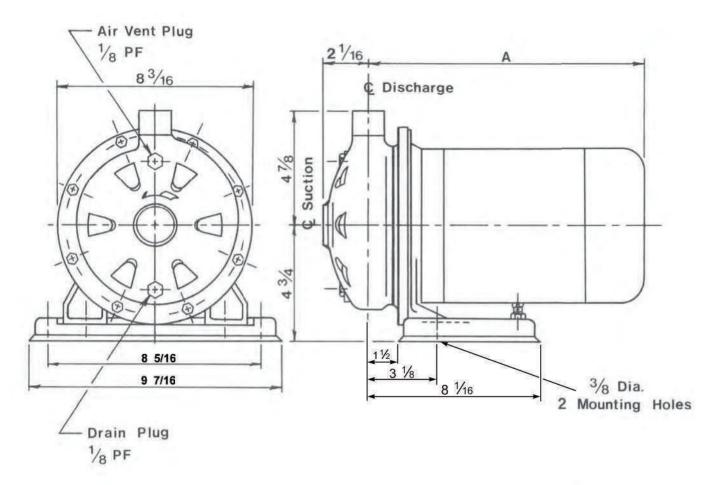


Inches

		Pump Size - NPT (in)		A	Unit Weight (lbs)				
Model	Size				Single Phase		Three Phase		
		Suction	Discharge	(max.)	ODP	TEFC	ODP	TEFC	
701 ¾HP	1 x 11/4 - 41/2	11/4	1	13 1/8	36	41	31	31	
703 1½HP	1 x 1¼ - 5¾6	11/4	1	139/16	47	50	39	39	
705 2HP	1 x 1¼ - 6¾6	11/4	t	147/16	51	58	44	48	
1201 1HP	1 x 11/4 - 41/2	11/4	1	13%16	41	46	33	32	
1203 1½HP	1 × 1½ - 5¾6	11/4	1	139/ie	47	50	39	39	
1205 3HP	1 × 1¼ - 6¾6	11/4	1	147/16	59	66	51	60	
2001 1½HP	1 x 1½ - 4½	11/2	1	131/16	47	50	39	39	
2003 3HP	1 x 1½ - 5¾i6	11/2	1	147/16	58	65	50	59	
2005 3HP	1 x 1½ - 511/16	11/2	1	147/16	58	65	50	59	

NOT FOR CONSTRUCTION PURPOSES UNLESS CERTIFIED.



CUSTO	MER REF	OUR REF		
HP	RPM	VOLTAGE -		ENCL
CERTI	FIED		DATE	-

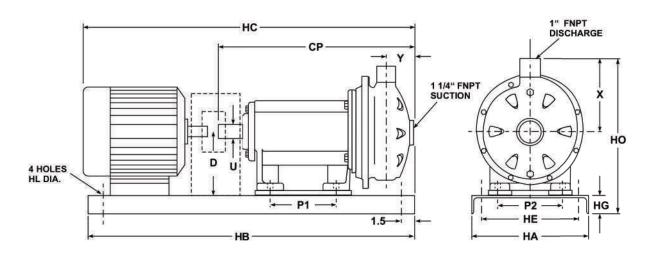

						DIM	ENSI	ONS							WE	IGHT (lb	s)*
MOTOR FRAME	HA	НВ	HL	HC*	но	HG	HE	CP	P1	P2	D**	U	X	Y	PUMP	MOTOR	ASS'Y
56	10	30	0.62	23	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	30	95
143T	10	30	0.62	25	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	40	105
145T	10	30	0.62	26	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	50	115
182T	10	30	0.62	27	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	80	150
184T	10	30	0.62	28	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	90	160


NOTES - Not for construction purposes unless certified above. - All dimensions in inches.

- Some dimensions may vary +/- 0.25 inches.
 Approximate only.
 Shaft centerline to underside of pump feet.

FORM PS00270 January 03



CUSTO	MER REF		OUR REF	
HP	RPM	VOLTAGE -		ENCL
CERTI	FIED -		DATE	=

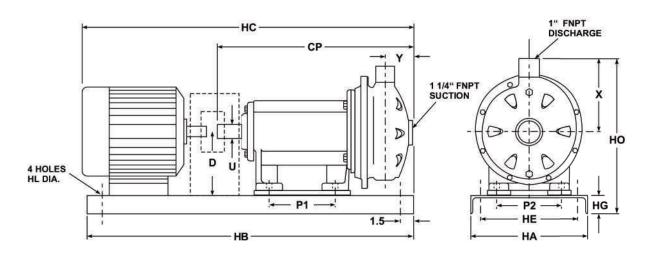

						DIM	ENSI	ONS							WE	IGHT (lb	s)*
MOTOR FRAME	HA	НВ	HL	HC*	но	HG	HE	CP	P1	P2	D**	U	X	Y	PUMP	MOTOR	ASS'Y
56	10	30	0.62	23	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	30	95
143T	10	30	0.62	25	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	40	105
145T	10	30	0.62	26	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	50	115
182T	10	30	0.62	27	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	80	150
184T	10	30	0.62	28	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	90	160


NOTES - Not for construction purposes unless certified above. - All dimensions in inches.

- Some dimensions may vary +/- 0.25 inches.
 Approximate only.
 Shaft centerline to underside of pump feet.

FORM PS00280 January 03



CUSTO	MER REF		OUR REF	
HP	RPM	VOLTAGE -		ENCL
CEDTI	EIED		DATE	

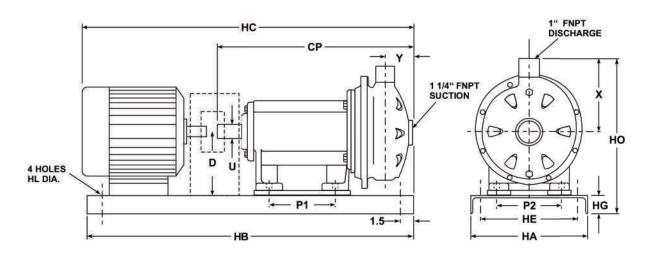

						DIM	ENSI	ONS							WE	IGHT (lb	s)*
MOTOR FRAME	HA	НВ	HL	HC*	но	HG	HE	CP	P1	P2	D**	U	X	Y	PUMP	MOTOR	ASS'Y
56	10	30	0.62	23	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	30	95
143T	10	30	0.62	25	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	40	105
145T	10	30	0.62	26	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	50	115
182T	10	30	0.62	27	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	80	150
184T	10	30	0.62	28	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	90	160


NOTES - Not for construction purposes unless certified above. - All dimensions in inches.

- Some dimensions may vary +/- 0.25 inches.
 Approximate only.
 Shaft centerline to underside of pump feet.

FORM PS00290 January 03



CUSTO	MER REF		OUR REF	
HP	RPM	VOLTAGE -		ENCL
CERTI	FIED		DATE	

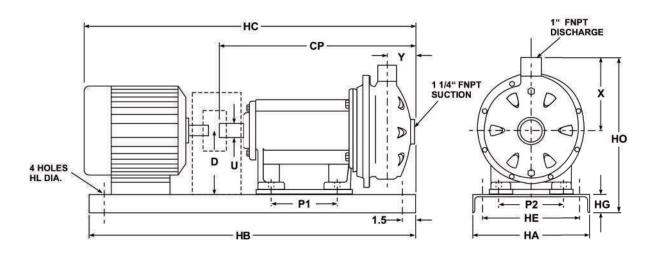

						DIM	ENSI	ONS							WE	IGHT (lb	s)*
MOTOR FRAME	HA	НВ	HL	HC*	но	HG	HE	CP	P1	P2	D**	U	X	Y	PUMP	MOTOR	ASS'Y
56	10	30	0.62	23	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	30	95
143T	10	30	0.62	25	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	40	105
145T	10	30	0.62	26	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	50	115
182T	10	30	0.62	27	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	80	150
184T	10	30	0.62	28	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	90	160


NOTES - Not for construction purposes unless certified above. - All dimensions in inches.

- Some dimensions may vary +/- 0.25 inches.
 Approximate only.
 Shaft centerline to underside of pump feet.

FORM PS00300 January 03



CUSTO	MER REF		OUR REF	
HP	RPM	VOLTAGE -		ENCL
CERTI	FIED -		DATE	=

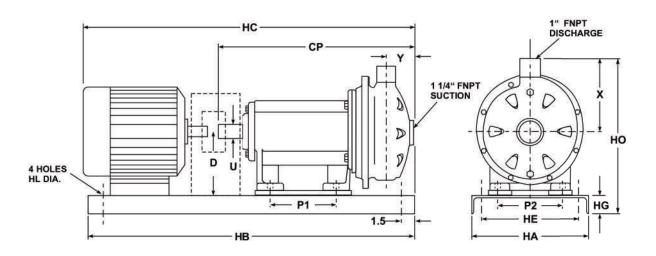

						DIM	ENSI	ONS							WE	IGHT (lb	s)*
MOTOR FRAME	HA	НВ	HL	HC*	но	HG	HE	CP	P1	P2	D**	U	X	Y	PUMP	MOTOR	ASS'Y
56	10	30	0.62	23	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	30	95
143T	10	30	0.62	25	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	40	105
145T	10	30	0.62	26	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	50	115
182T	10	30	0.62	27	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	80	150
184T	10	30	0.62	28	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	90	160


NOTES - Not for construction purposes unless certified above. - All dimensions in inches.

- Some dimensions may vary +/- 0.25 inches.
 Approximate only.
 Shaft centerline to underside of pump feet.

FORM PS00310 January 03



CUSTO	MER REF		OUR REF	
HP	RPM	VOLTAGE -		ENCL
CERTI	FIED -		DATE	=

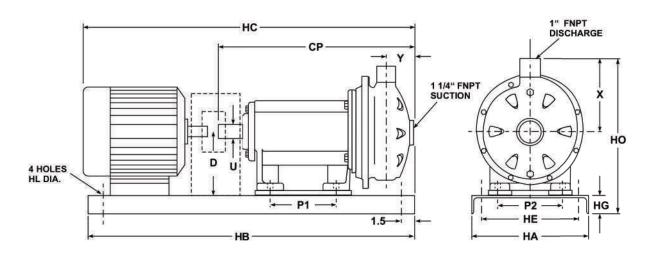

						DIM	ENSI	ONS							WE	IGHT (lb	s)*
MOTOR FRAME	HA	НВ	HL	HC*	но	HG	HE	CP	P1	P2	D**	U	X	Y	PUMP	MOTOR	ASS'Y
56	10	30	0.62	23	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	30	95
143T	10	30	0.62	25	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	40	105
145T	10	30	0.62	26	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	50	115
182T	10	30	0.62	27	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	80	150
184T	10	30	0.62	28	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	90	160


NOTES - Not for construction purposes unless certified above. - All dimensions in inches.

- Some dimensions may vary +/- 0.25 inches.
 Approximate only.
 Shaft centerline to underside of pump feet.

FORM PS00320 January 03



CUSTON	MER REF	0	UR REF
HP	RPM	VOLTAGE	ENCL
CERTI	FIED		DATE

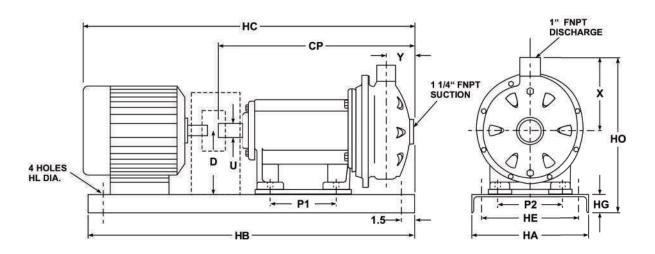

	DIMENSIONS														WEIGHT (lbs)*		
MOTOR FRAME	HA	НВ	HL	HC*	но	HG	HE	CP	P1	P2	D**	U	X	Υ	PUMP	MOTOR	ASS'Y
56	10	30	0.62	23	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	30	95
143T	10	30	0.62	25	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	40	105
145T	10	30	0.62	26	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	50	115
182T	10	30	0.62	27	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	80	150
184T	10	30	0.62	28	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	90	160

NOTES - Not for construction purposes unless certified above. - All dimensions in inches.


- Some dimensions may vary +/- 0.25 inches.
 Approximate only.
 Shaft centerline to underside of pump feet.

FORM PS00330 January 03



SERIES PS - DIMENSIONAL OUTLINE **MODEL - PST2003**

CUSTO	MER REF		OUR REF	
HP	RPM	VOLTAGE -		ENCL
CERTII	FIFD -		DATE	

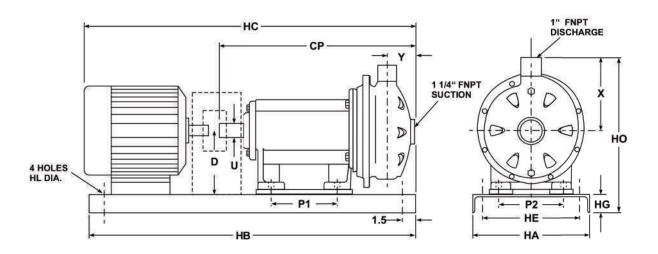

DIMENSIONS									WEIGHT (lbs)*								
MOTOR FRAME	HA	НВ	HL	HC*	но	HG	HE	CP	P1	P2	D**	U	X	Y	PUMP	MOTOR	ASS'Y
56	10	30	0.62	23	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	30	95
143T	10	30	0.62	25	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	40	105
145T	10	30	0.62	26	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	50	115
182T	10	30	0.62	27	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	80	150
184T	10	30	0.62	28	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	90	160

NOTES - Not for construction purposes unless certified above. - All dimensions in inches.


- Some dimensions may vary +/- 0.25 inches.
 Approximate only.
 Shaft centerline to underside of pump feet.

FORM PS00340 January 03



SERIES PS - DIMENSIONAL OUTLINE **MODEL - PST2005**

CUSTO	MER REF	OUR REF		
HP	RPM	VOLTAGE -		ENCL
CEDTI	EIED		DATE	=

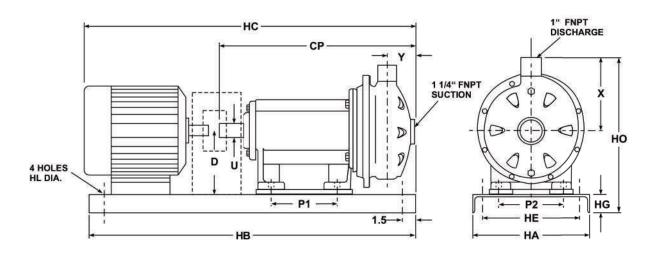

DIMENSIONS									WEIGHT (lbs)*								
MOTOR FRAME	HA	НВ	HL	HC*	но	HG	HE	CP	P1	P2	D**	U	X	Y	PUMP	MOTOR	ASS'Y
56	10	30	0.62	23	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	30	95
143T	10	30	0.62	25	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	40	105
145T	10	30	0.62	26	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	50	115
182T	10	30	0.62	27	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	80	150
184T	10	30	0.62	28	11.75	2.62	7.0	12.12	4.25	5.5	3.68	0.75	4.88	2.06	25	90	160

NOTES - Not for construction purposes unless certified above. - All dimensions in inches.

- Some dimensions may vary +/- 0.25 inches.
 Approximate only.
 Shaft centerline to underside of pump feet.

FORM PS00350 January 03




SERIES PS Specifications MODEL - PSF

	Standard	Optional
Size		
Suction	PSF70: 2" ANSI	
(150 lb. ANSI R.F. Equivalent)	PSF120: 21/2" ANSI	
	PSF200: 21/2" ANSI	
Discharge	PSF70. 11/4" ANSI	
(150 lb. ANSI R.F. Equivalent)	PSF120: 11/2" ANSI	
	PSF200: 2" ANSI	
H.P. Range	1 H.P. to 15 H.P.	
Performance Range		
Capacity	13 to 380 GPM at 3450 R.P.M.	
Head	33 to 285 feet at 3450 R P.M.	
Liquid Handling		
Liquid Type	Various	
Temperature	Dependent on Mechanical Seal	
	Selection	
Working Pressure	Max. 145 P.S.I.G. (10 Bar)	
Materials		
Casing	304 Stainless Steel	
Impeller (Closed Type)	304 Stainless Steel	
Shaft	Stainless Steel	
Bracket	Cast Iron	
Mechanical Seal	Carbon vs. Ceramic	Various material options for high
	(Buna Elastomers)	temperature, corrosive, and
		abrasive services.
Direction of Rotation	Clockwise when viewed from	
	motor end	
Motor		
Туре	NEMA JM Frame	*Explosion Proof
Speed	60Hz 3450 RPM (2 poles)	•1750 RPM for lower flows and
Single Phase	TEFC: 1 H.P. to 10 H.P.	pressures
	ODP: 1 H.P. to 10 H.P.	
	115/208-230V	
Three Phase	TEFC: 1 H.P. to 15 H.P.	
	ODP: 1 H.P. to 15 H.P.	
	208-230/460V and 575V	



SERIES PS Cross Section MODEL - PSF Close-coupled

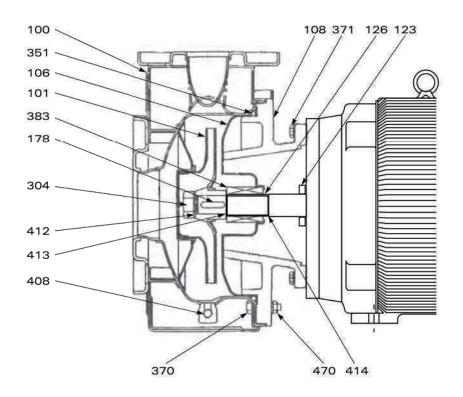


ITEM	QTY REQ'D	DESCRIPTION	MATERIAL
100	1	Casing	304 Stainless steel
101	1	Impeller	304 Stainless steel
106	1	Casing cover	304 Stainless steel
108	1	Adapter	Cast Iron
123	1	Slinger	Rubber
126	1	Shaft sleeve	304 Stainless steel
178	1	Impeller key	Steel
304	1	Impeller bolt	316 SS
351	1	Casing o-ring	Buna (standard)
370	*	Casing bolt	304 Stainless steel
371	4	Motor bolt	Steel
383	1	Mechanical seal	Various
408	1	Casing plug	304 Stainless steel
412	1	Impeller gasket	Teflon
413	1	Sleeve gasket	Teflon
414	1	Sleeve gasket	Teflon
470	*	Casing bolt nut	304 Stainless Steel

^{*} Dependent on pump model



SERIES PS Cross Section MODEL - PSF Frame mounted

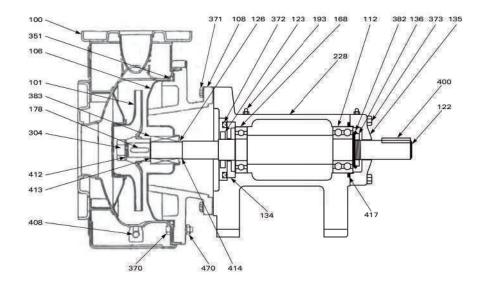

ITEM	QTY REQ'D	DESCRIPTION	MATERIAL
100	1	Casing	304 Stainless steel
101	18	Impeller	304 Stainless steel
106	1	Casing cover	304 Stainless steel
108	i	Adapter	Cast Iron
112	1	Thrust bearing	Steel
122	1	Shaft	Steel
123	18	Slinger	Rubber
126	11	Shaft sleeve	304 Stainless steel
134	1	Inboard brg cap	Steel
135	1	Outboard brg cap	Cast Iron
136	1	Brg lock nut	Steel
168	1	Radial bearing	Steel
178	1	Impeller key	304 Stainless steel
193	2	Grease fitting	Steel
228	1	Bearing frame	Cast Iron
304	10	Impeller bolt	304 Stainless steel
351	1	Casing o-ring	Buna (standard)
370	3.55	Casing bolt	304 Stainless steel
371	4	Frame bolt	Steel
372	4	Inboard cap bolt	Steel
373	4	Outboard cap bolt	Steel
382	1	Brg lock washer	Steel
383	1	Mechanical seal	Various
400	1	Shaft key	Steel
408	1	Casing plug	304 Stainless steel
412	1	Impeller gasket	Teflon
413	1	Sleeve gasket	Teflon
414	1	Sleeve gasket	Teflon
417	1	Retaining ring	Steel
470		Casing bolt nut	304 Stainless steel


^{*} Dependent on pump model

FORM - PS00380 January 03




SERIES PS Specifications MODEL - PSF

Model PSF Selection Chart (1725 RPM)

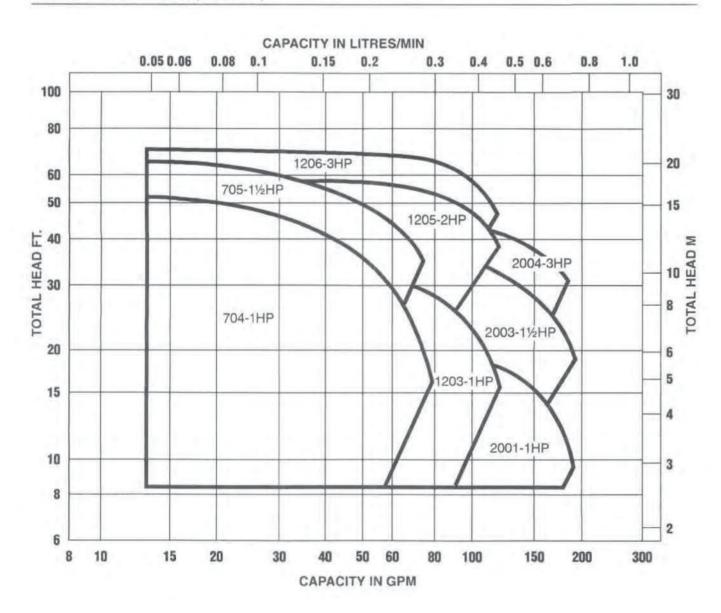




CUSTOMER		REFERENCE		
FLUID	S.G	TEMP	CAPACITY	TDH
CERTIFIED:		DA	TE:	

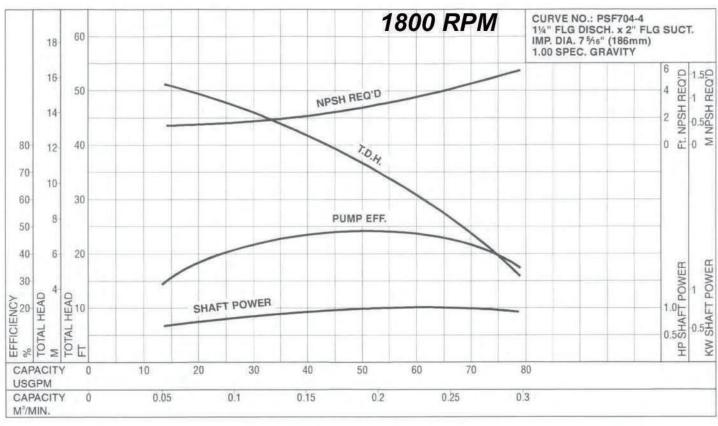

FORM - PS00400 January 03




CUSTOMER		REFERENCE		
FLUID	s.g	TEMP	CAPACITY	TDH
CERTIFIED:		DA	TE:	

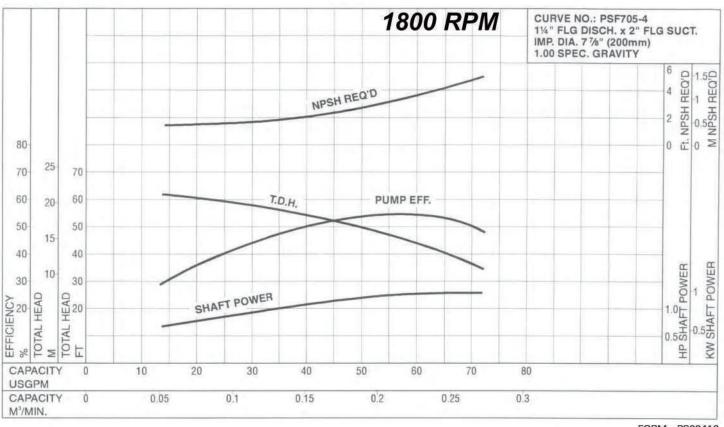

FORM - PS00410 January 03




CUSTOMER		REFERENCE		
FLUID	S.G	TEMP	CAPACITY	TDH
CERTIFIED:		DA	TE:	

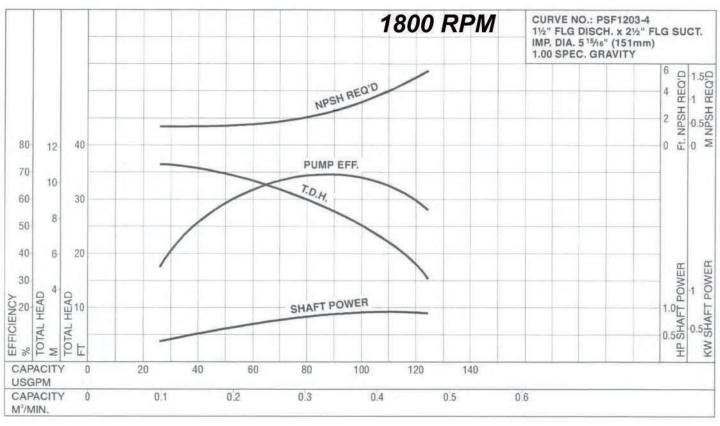

FORM - PS00420 January 03




CUSTOMER		REFERENCE		
FLUID	S.G	TEMP	CAPACITY	TDH
CERTIFIED:		DA	TE:	

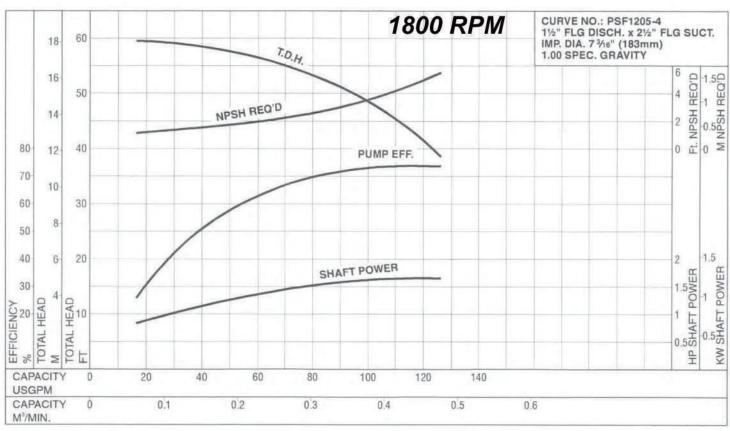

FORM - PS00430 January 03




CUSTOMER		REFERENCE		
FLUID	S.G	TEMP	CAPACITY	TDH
CERTIFIED:		DA	TE:	

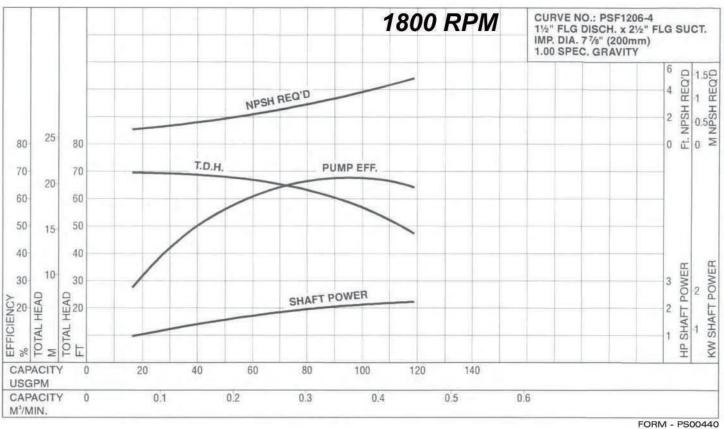

DRM - PS00440 January 03




CUSTOMER			REFERENCE _	
FLUID	S.G	TEMP	CAPACITY	TDH
CERTIFIED:		DA	TE:	

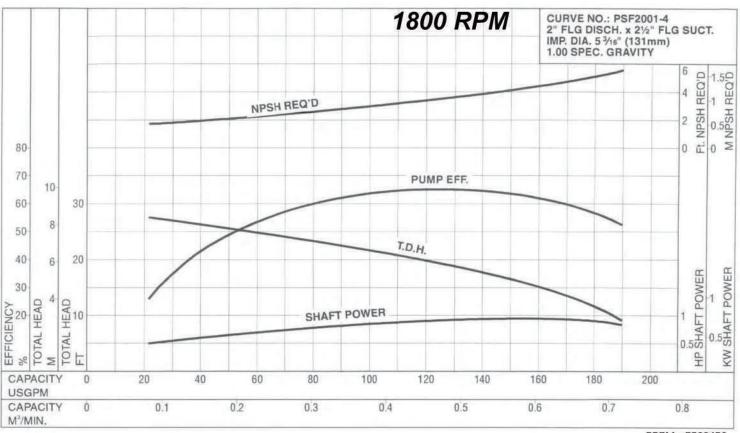

FORM - PS00450 January 03




CUSTOMER			REFERENCE		
FLUID	S.G	TEMP	CAPACITY	TDH	
CERTIFIED:		DA	TE:		

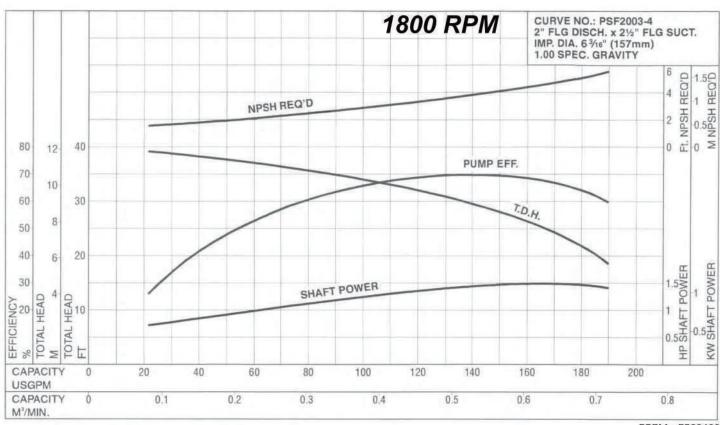

FORM - PS00460 January 03



CUSTOMER			REFERENCE		
FLUID	S.G	TEMP	CAPACITY	TDH	
CERTIFIED:		DA	TE:		

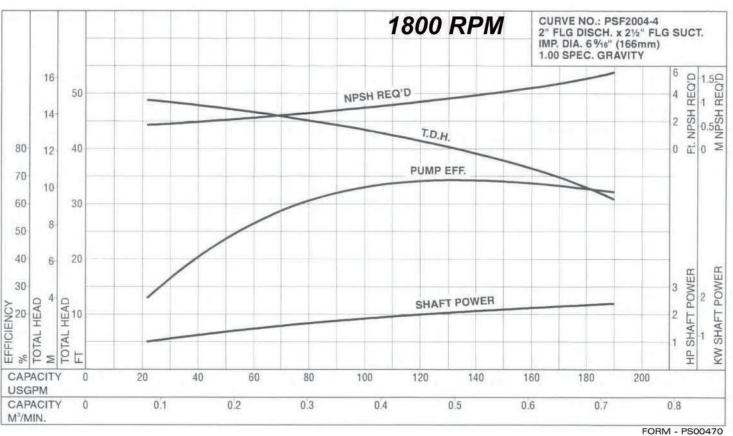


January 03




SERIES PS Specifications MODEL - PSF

Model PSF Selection Chart (3450 RPM)

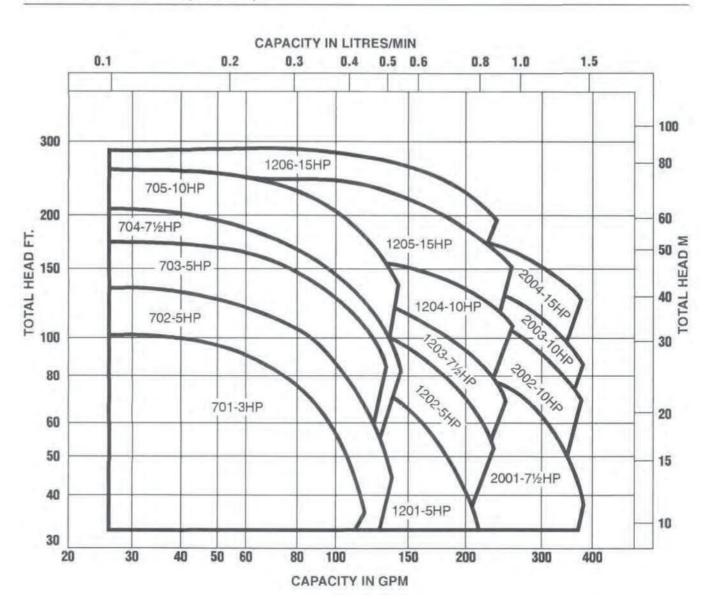




CUSTOMER			REFERENCE	
FLUID	s.g	TEMP	CAPACITY	TDH
CERTIFIED:		DA	TE:	

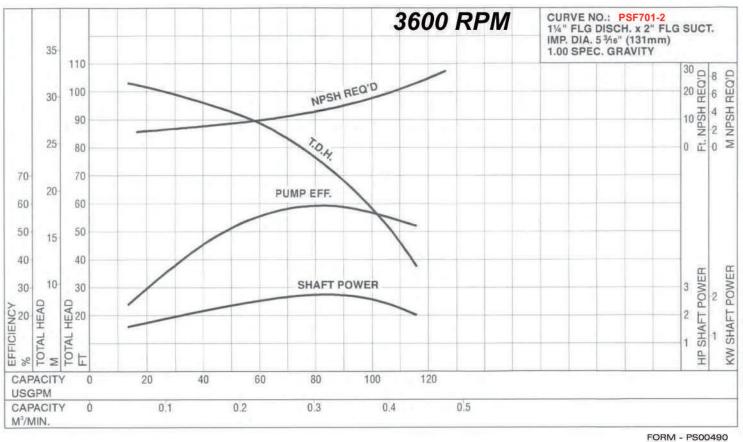

ORM - PS00490 January 03




CUSTOMER			REFERENCE _	
FLUID	S.G	TEMP	CAPACITY	TDH
CERTIFIED:		DA	TE:	

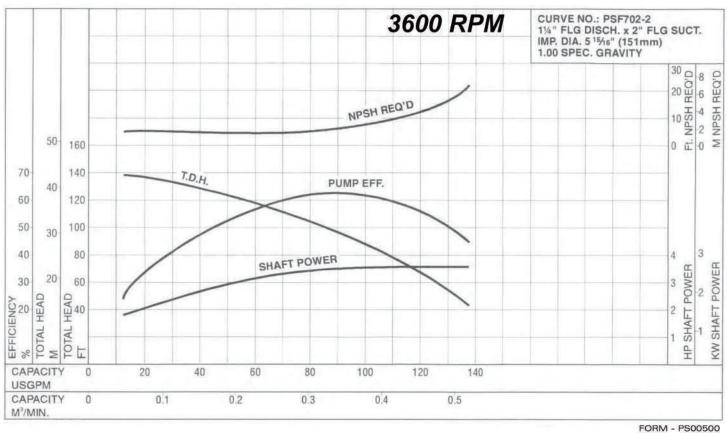

DRM - PS00500 January 03



CUSTOMER			REFERENCE	
FLUID	s.g	TEMP	CAPACITY	TDH
CERTIFIED:		DA	TE:	

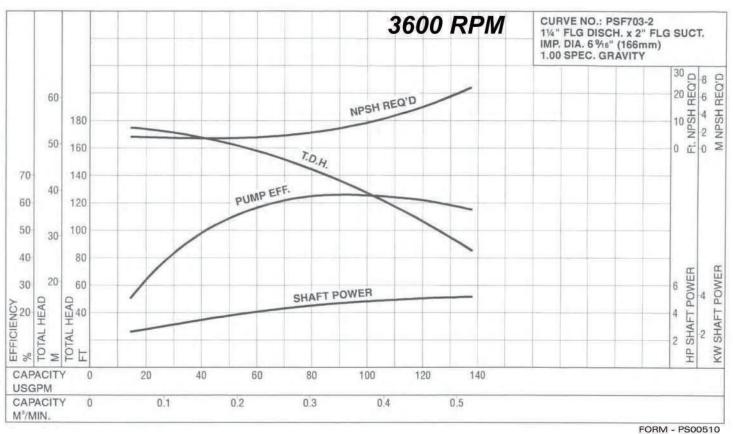

January 03




CUSTOMER			REFERENCE	
FLUID	S.G	TEMP	CAPACITY	TDH
CERTIFIED:		DA	TE:	



January 03




CUSTOMER			REFERENCE	
FLUID	s.g	TEMP	CAPACITY	TDH
CERTIFIED:		DA	TE:	

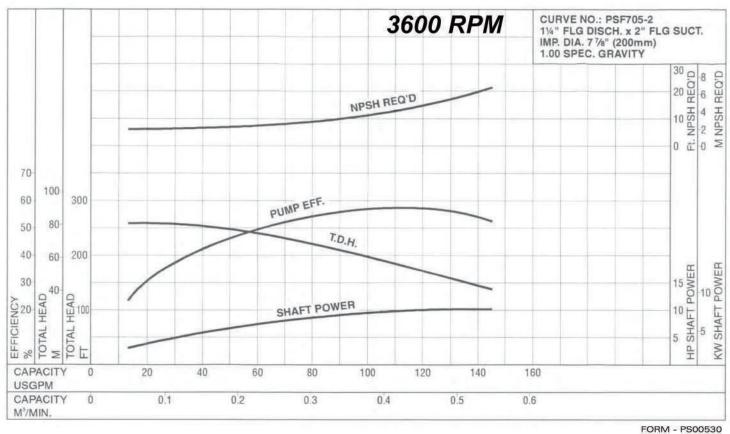

ORM - PS0053 January 03




CUSTOMER			REFERENCE	
FLUID	S.G	TEMP	CAPACITY	TDH
CERTIFIED:		DA	TE:	

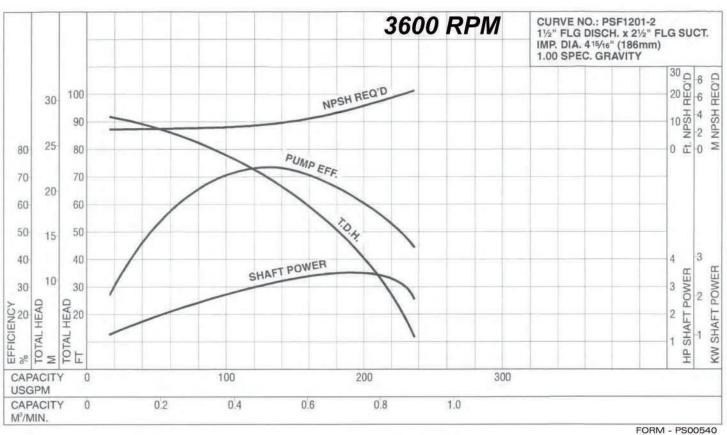

DRM - PS00540 January 03




CUSTOMER			REFERENCE _	
FLUID	S.G	TEMP	CAPACITY	TDH
CERTIFIED:		DA	TE:	

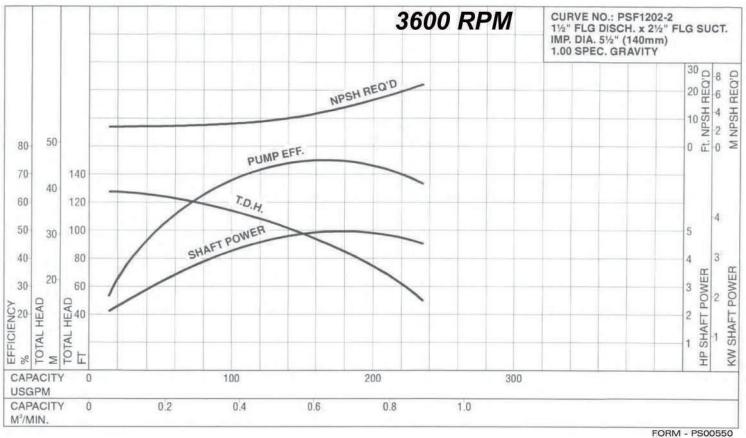

DRM - PS0055 January 03



CUSTOMER			REFERENCE	
FLUID	S.G	TEMP	CAPACITY	TDH
CERTIFIED:		DA:	TE:	

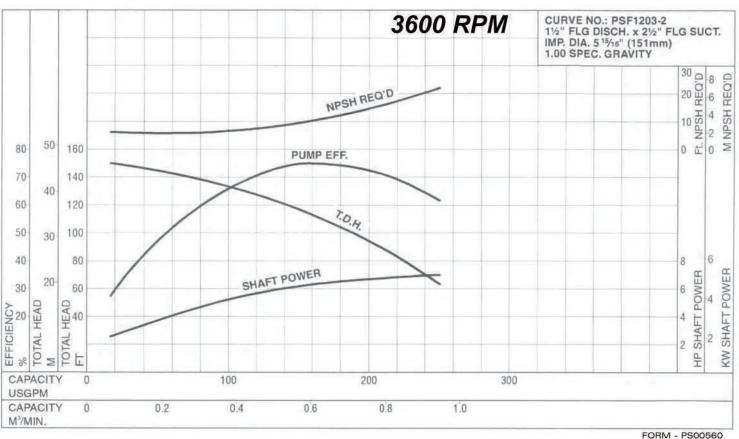

DRM - PS00560 January 03




CUSTOMER			REFERENCE		
FLUID	S.G	TEMP	CAPACITY	TDH	
CERTIFIED:		DA	TE:		



January 03




CUSTOMER			REFERENCE		
FLUID	S.G	TEMP	CAPACITY	TDH	
CERTIFIED:		D4	TF.		

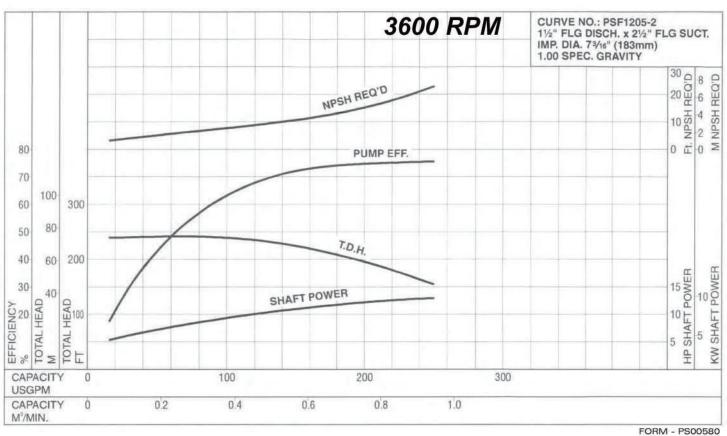

DRM - PS00580 January 03




CUSTOMER			REFERENCE		
FLUID	S.G	_TEMP	CAPACITY	TDH	
CERTIFIED:		D4	TF:		

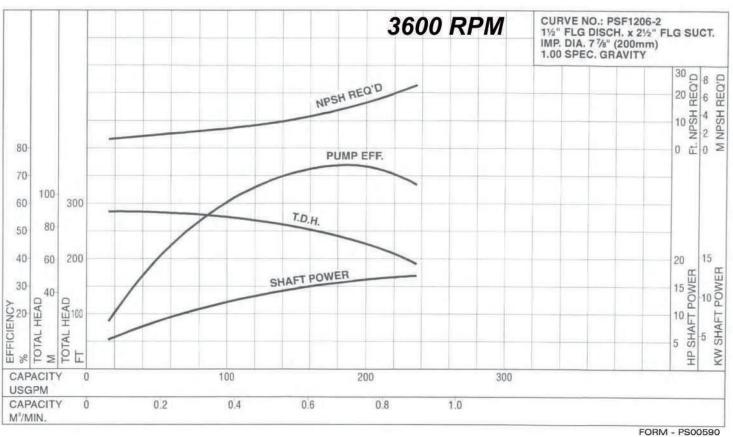

January 03




CUSTOMER			REFERENCE		
FLUID	S.G	TEMP	CAPACITY	TDH	
CERTIFIED:		DA.	TE:		

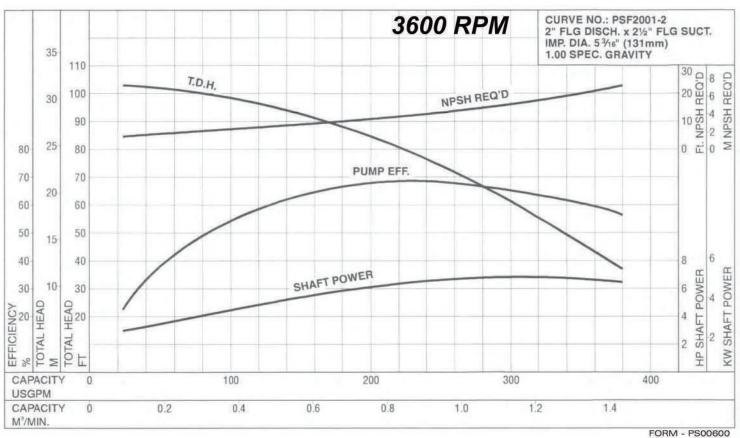

DRM - PS0060 January 03



CUSTOMER			REFERENCE		
FLUID	S.G	TEMP	CAPACITY	TDH	
CERTIFIED		0.4	TE:8		

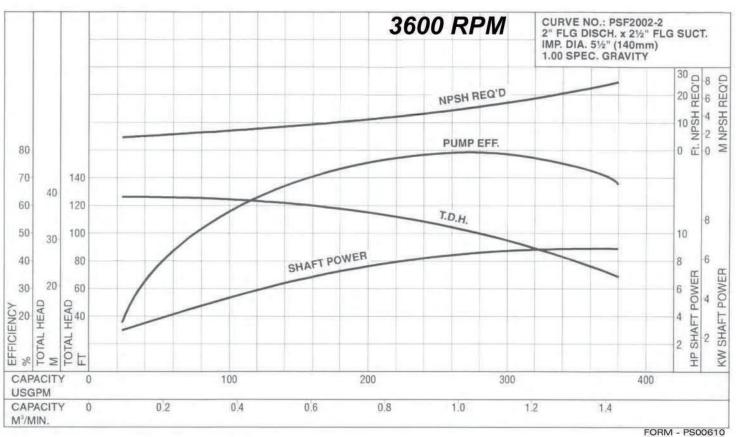

January 03




CUSTOMER			REFERENCE		
FLUID	S.G	TEMP	CAPACITY	TDH	
CERTIFIED		0.4	TE:8		



DRM - PS0062 January 03




CUSTOMER			REFERENCE		
FLUID	S.G	_TEMP	CAPACITY	TDH	
CERTIFIED:		D4	TF:		

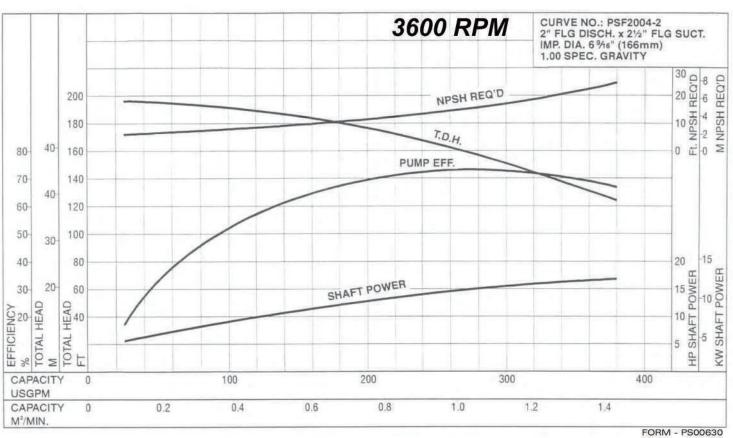

January 03






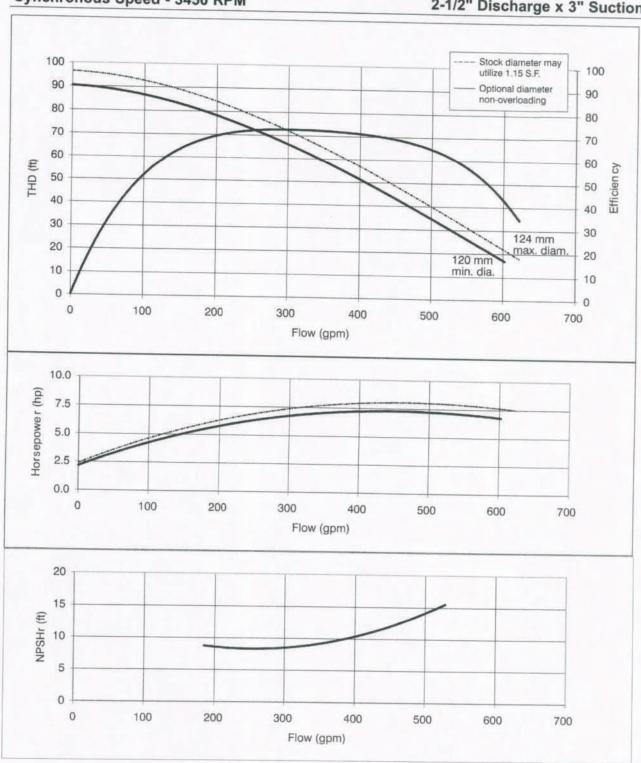




Synchronous Speed - 3450 RPM

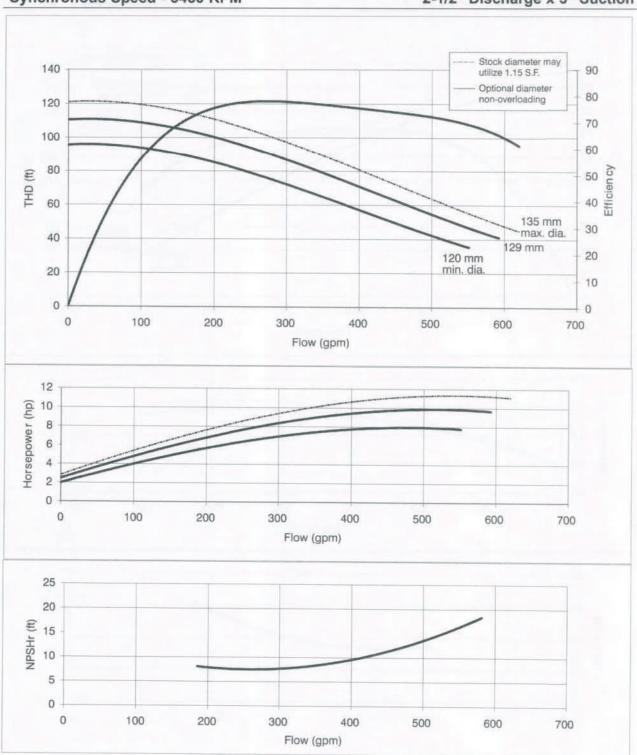




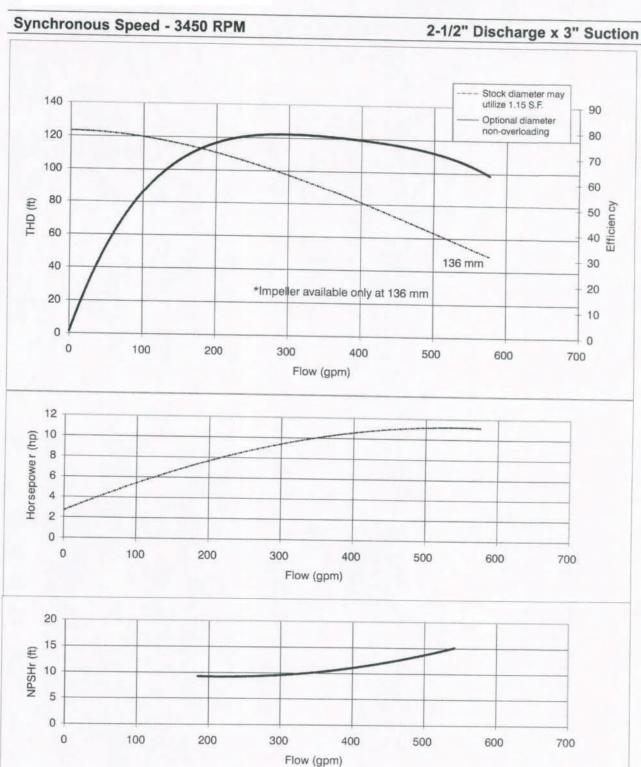




Synchronous Speed - 3450 RPM

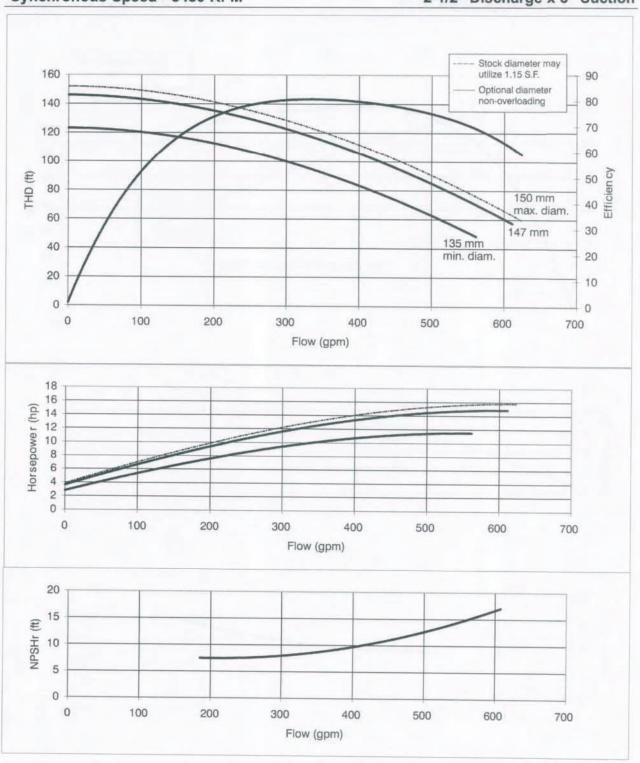




Synchronous Speed - 3450 RPM

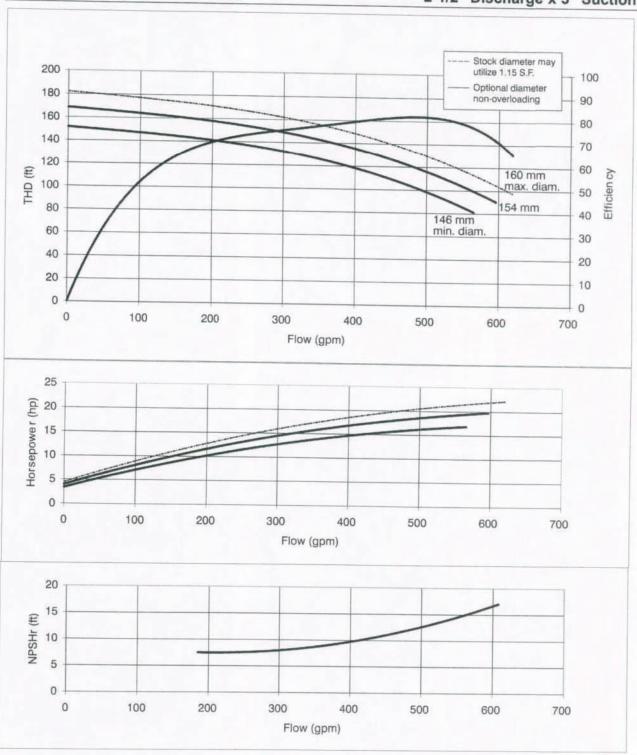



Synchronous Speed - 3450 RPM

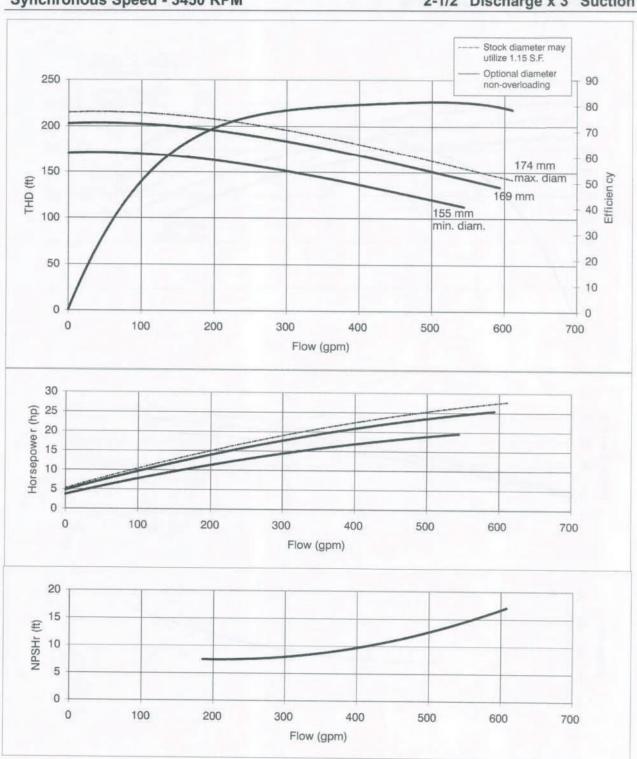




SERIES PS Performance Curve **MODEL - PSF3007**



2-1/2" Discharge x 3" Suction

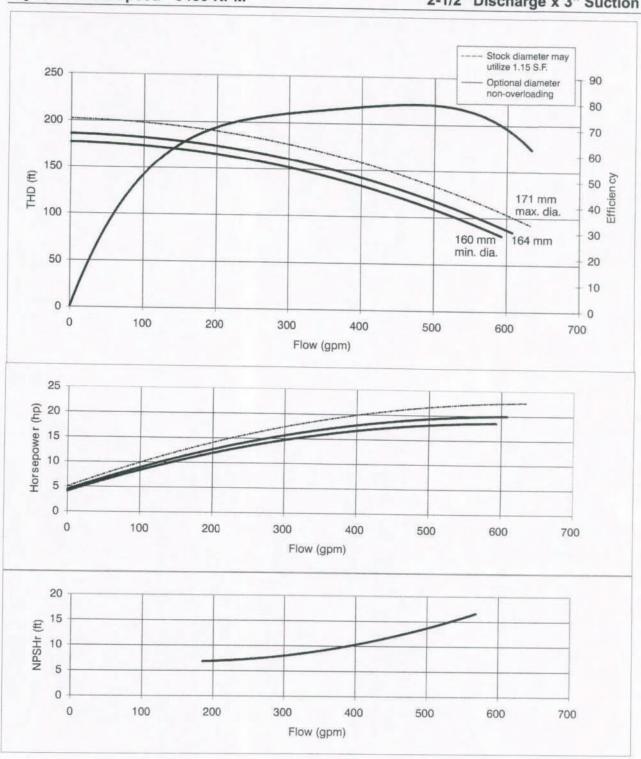




SERIES PS Performance Curve **MODEL - PSF3008**

Synchronous Speed - 3450 RPM

2-1/2" Discharge x 3" Suction

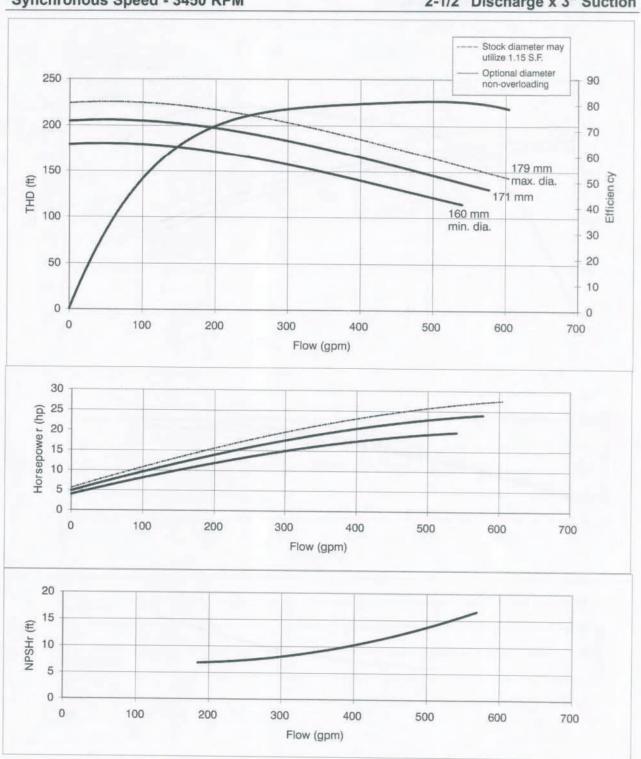





SERIES PS Performance Curve MODEL - PSF3009

Synchronous Speed - 3450 RPM

2-1/2" Discharge x 3" Suction

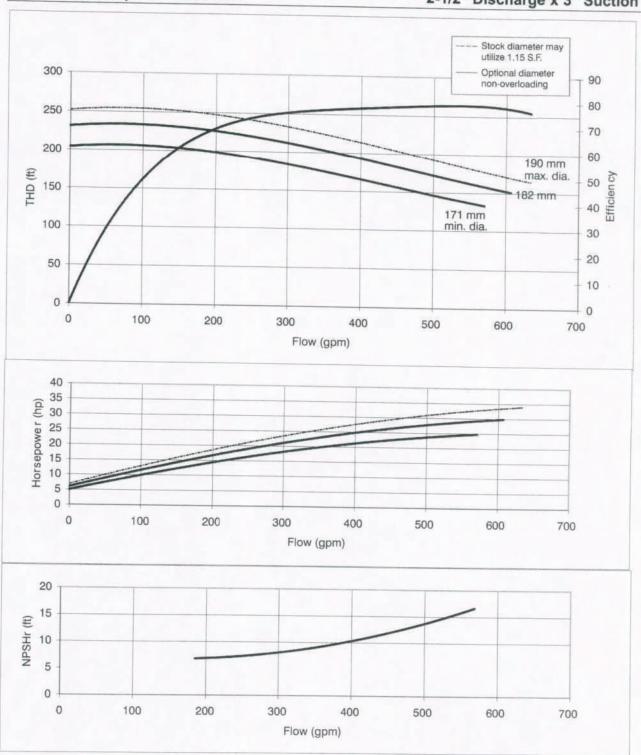




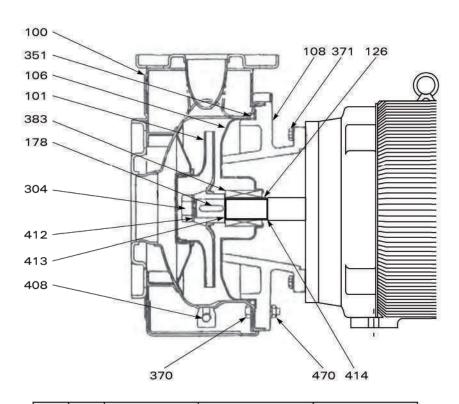


ITEM	QTY REQ'D	DESCRIPTION	MATERIAL	PART NUMBER
100	1	Casing	304 Stainless steel	E-251402201
101	1	Impeller	304 Stainless steel	E-251450866
106	1	Casing cover	304 Stainless steel	E-251438023
108	1	Adapter	Cast Iron	E-240080580
126	1	Shaft sleeve	304 Stainless steel	E-275416013
178	1	Impeller key	Steel	E-316X316
304	1	Impeller bolt	316 SS	E-275440031
351	1	Casing o-ring	Buna	E-160X5.3B
			Viton	E-160X5.3V
370	8	Casing bolt	304 Stainless steel	Е-М8ХЗОНН
371	4	Motor bolt	Steel	E-3/8-16X3/4HH
383	1	Mechanical seal	Carbon/Ceramic/Buna	S18-2821-ABN
			Carbon/Ceramic/Viton	S18-2821-AVT
			Carbon/S.S./EPR	S18-2821-CEP
			Carbon/Carbide/Viton	S18-2821-BVT
			Carbide/Carbide/Viton	S18-2821-EVT
408	1	Casing plug	304 Stainless steel	E-363631000
412	1	Impeller gasket	Teflon	E-275476030
413	1	Sleeve gasket	Teflon	E-275476029
414	1	Sleeve gasket	Teflon	E-275476028
470	8	Casing bolt nut	304 Stainless Steel	E-M8HN



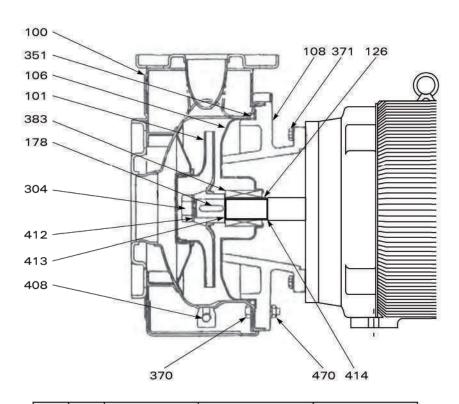


ITEM	QTY REQ'D	DESCRIPTION	MATERIAL	PART NUMBER
100	1	Casing	304 Stainless steel	E-251402202
101	1	Impeller	304 Stainless steel	E-251450867
106	1	Casing cover	304 Stainless steel	E-251438024
108	1	Adapter	Cast Iron	E-240080581
126	1	Shaft sleeve	304 Stainless steel	E-275416013
178	1	Impeller key	Steel	E-316X316
304	1	Impeller bolt	316 SS	E-275440031
351	1	Casing o-ring	Buna	E-190X5.3B
			Viton	E-190X5.3V
370	10	Casing bolt	304 Stainless steel	E-M10X35HH
371	4	Motor bolt	Steel	E-3/8-16X1
383	1	Mechanical seal	Carbon/Ceramic/Buna	S18-2821-ABN
			Carbon/Ceramic/Viton	S18-2821-AVT
			Carbon/S.S./EPR	S18-2821-CEP
			Carbon/Carbide/Viton	S18-2821-BVT
			Carbide/Carbide/Viton	S18-2821-EVT
408	1	Casing plug	304 Stainless steel	E-363631000
412	1	Impeller gasket	Teflon	E-275476030
413	1	Sleeve gasket	Teflon	E-275476029
414	1	Sleeve gasket	Teflon	E-275476028
470	10	Casing bolt nut	304 Stainless Steel	E-M10HN



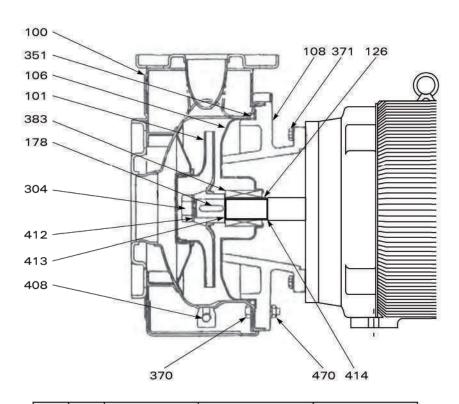


ITEM	QTY REQ'D	DESCRIPTION	MATERIAL	PART NUMBER
100	1	Casing	304 Stainless steel	E-251402202
101	1	Impeller	304 Stainless steel	E-251450868
106	1	Casing cover	304 Stainless steel	E-251438024
108	1	Adapter	Cast Iron	E-240080581
126	1	Shaft sleeve	304 Stainless steel	E-275416013
178	1	Impeller key	Steel	E-316X316
304	1	Impeller bolt	316 SS	E-275440031
351	1	Casing o-ring	Buna	E-190X5.3B
			Viton	E-190X5.3V
370	10	Casing bolt	304 Stainless steel	E-M10X35HH
371	4	Motor bolt	Steel	E-3/8-16X1
383	1	Mechanical seal	Carbon/Ceramic/Buna	S18-2821-ABN
			Carbon/Ceramic/Viton	S18-2821-AVT
			Carbon/S.S./EPR	S18-2821-CEP
			Carbon/Carbide/Viton	S18-2821-BVT
			Carbide/Carbide/Viton	S18-2821-EVT
408	1	Casing plug	304 Stainless steel	E-363631000
412	1	Impeller gasket	Teflon	E-275476030
413	1	Sleeve gasket	Teflon	E-275476029
414	1	Sleeve gasket	Teflon	E-275476028
470	10	Casing bolt nut	304 Stainless Steel	E-M10HN



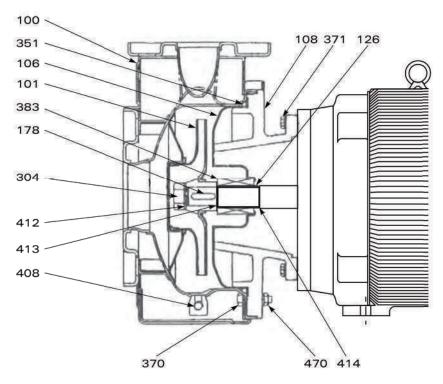


ITEM	QTY REQ'D	DESCRIPTION	MATERIAL	PART NUMBER
100	1	Casing	304 Stainless steel	E-251402203
101	1	Impeller	304 Stainless steel	E-251450869
106	1	Casing cover	304 Stainless steel	E-251402220
108	1	Adapter	C.I. (up to 184JM)	E-240080583
			C.I. (213JM and up)	E-240080584
126	1	Shaft sleeve	304 Stainless steel	E-275416013
178	1	Impeller key	Steel	E-316X316
304	1	Impeller bolt	316 SS	E-275440031
351	1	Casing o-ring	Buna	E-230X5.3B
			Viton	E-230X5.3V
370	12	Casing bolt	304 Stainless steel	E-M10X30HH
371	4	Motor bolt	Steel	E-1/2-13X1-1/2
383	1	Mechanical seal	Carbon/Ceramic/Buna	S18-2821-ABN
			Carbon/Ceramic/Viton	S18-2821-AVT
			Carbon/S.S./EPR	S18-2821-CEP
			Carbon/Carbide/Viton	S18-2821-BVT
			Carbide/Carbide/Viton	S18-2821-EVT
408	1	Casing plug	304 Stainless steel	E-363631000
412	1	Impeller gasket	Teflon	E-275476030
413	1	Sleeve gasket	Teflon	E-275476029
414	1	Sleeve gasket	Teflon	E-275476028
470	12	Casing bolt nut	304 Stainless Steel	E-M10HN



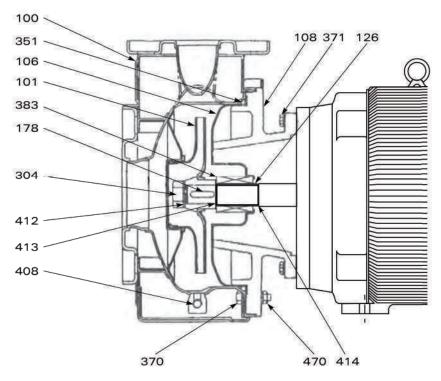


ITEM	QTY REQ'D	DESCRIPTION	MATERIAL	PART NUMBER
100	1	Casing	304 Stainless steel	E-251402203
101	1	Impeller	304 Stainless steel	E-251450870
106	1	Casing cover	304 Stainless steel	E-251402220
108	1	Adapter	C.I. (up to 184JM)	E-240080583
			C.I. (213JM and up)	E-240080584
126	1	Shaft sleeve	304 Stainless steel	E-275416013
178	1	Impeller key	Steel	E-316X316
304	1	Impeller bolt	316 SS	E-275440031
351	1	Casing o-ring	Buna	E-230X5.3B
			Viton	E-230X5.3V
370	12	Casing bolt	304 Stainless steel	E-M10X35HH
371	4	Motor bolt	Steel	E-1/2-13X1-1/2
383	1	Mechanical seal	Carbon/Ceramic/Buna	S18-2821-ABN
			Carbon/Ceramic/Viton	S18-2821-AVT
			Carbon/S.S./EPR	S18-2821-CEP
			Carbon/Carbide/Viton	S18-2821-BVT
			Carbide/Carbide/Viton	S18-2821-EVT
408	1	Casing plug	304 Stainless steel	E-363631000
412	1	Impeller gasket	Teflon	E-275476030
413	1	Sleeve gasket	Teflon	E-275476029
414	1	Sleeve gasket	Teflon	E-275476028
470	12	Casing bolt nut	304 Stainless Steel	E-M10HN



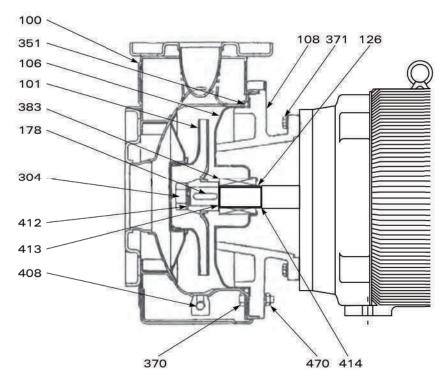


ITEM	QTY REQ'D	DESCRIPTION	MATERIAL	PART NUMBER
100	1	Casing	304 Stainless steel	E-251402204
101	1	Impeller	304 Stainless steel	E-251450871
106	1	Casing cover	304 Stainless steel	E-251438023
108	1	Adapter	Cast Iron	E-240080580
126	1	Shaft sleeve	304 Stainless steel	E-275416013
178	1	Impeller key	Steel	E-316X316
304	1	Impeller bolt	316 SS	E-275440031
351	1	Casing o-ring	Buna	E-160X5.3B
			Viton	E-160X5.3V
370	8	Casing bolt	304 Stainless steel	Е-М8ХЗОНН
371	4	Motor bolt	Steel	E-3/8-16X3/4HH
383	1	Mechanical seal	Carbon/Ceramic/Buna	S18-2821-ABN
			Carbon/Ceramic/Viton	S18-2821-AVT
			Carbon/S.S./EPR	S18-2821-CEP
			Carbon/Carbide/Viton	S18-2821-BVT
			Carbide/Carbide/Viton	S18-2821-EVT
408	1	Casing plug	304 Stainless steel	E-363631000
412	1	Impeller gasket	Teflon	E-275476030
413	1	Sleeve gasket	Teflon	E-275476029
414	1	Sleeve gasket	Teflon	E-275476028
470	8	Casing bolt nut	304 Stainless Steel	E-M8HN



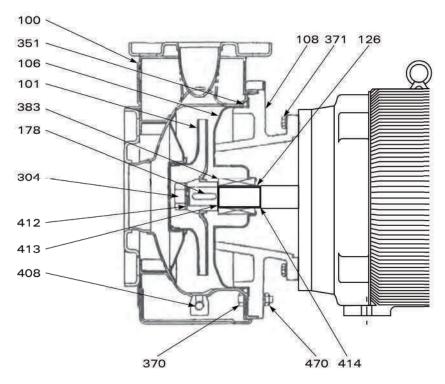


ITEM	QTY REQ'D	DESCRIPTION	MATERIAL	PART NUMBER
100	1	Casing	304 Stainless steel	E-251402204
101	1	Impeller	304 Stainless steel	E-251450872
106	1	Casing cover	304 Stainless steel	E-251438023
108	1	Adapter	Cast Iron	E-240080580
126	1	Shaft sleeve	304 Stainless steel	E-275416013
178	1	Impeller key	Steel	E-316X316
304	1	Impeller bolt	316 SS	E-275440031
351	1	Casing o-ring	Buna	E-160X5.3B
			Viton	E-160X5.3V
370	8	Casing bolt	304 Stainless steel	Е-М8ХЗОНН
371	4	Motor bolt	Steel	E-3/8-16X3/4HH
383	1	Mechanical seal	Carbon/Ceramic/Buna	S18-2821-ABN
			Carbon/Ceramic/Viton	S18-2821-AVT
			Carbon/S.S./EPR	S18-2821-CEP
			Carbon/Carbide/Viton	S18-2821-BVT
			Carbide/Carbide/Viton	S18-2821-EVT
408	1	Casing plug	304 Stainless steel	E-363631000
412	1	Impeller gasket	Teflon	E-275476030
413	1	Sleeve gasket	Teflon	E-275476029
414	1	Sleeve gasket	Teflon	E-275476028
470	8	Casing bolt nut	304 Stainless Steel	E-M8HN



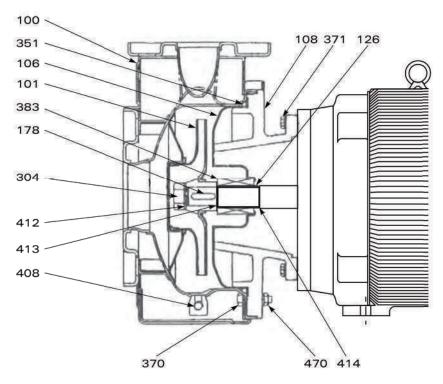


ITEM	QTY REQ'D	DESCRIPTION	MATERIAL	PART NUMBER
100	1	Casing	304 Stainless steel	E-251402205
101	1	Impeller	304 Stainless steel	E-251450873
106	1	Casing cover	304 Stainless steel	E-251438024
108	1	Adapter	C.I. (up to 184JM)	E-240080581
			C.I. (213JM and up)	E-240080582
126	1	Shaft sleeve	304 Stainless steel	E-275416013
178	1	Impeller key	Steel	E-316X316
304	1	Impeller bolt	316 SS	E-275440031
351	1	Casing o-ring	Buna	E-190X5.3B
			Viton	E-190X5.3V
370	10	Casing bolt	304 Stainless steel	E-M10X35HH
371	4	Motor bolt	Steel	E-3/8-16X1-3/4
383	1	Mechanical seal	Carbon/Ceramic/Buna	S18-2821-ABN
			Carbon/Ceramic/Viton	S18-2821-AVT
			Carbon/S.S./EPR	S18-2821-CEP
			Carbon/Carbide/Viton	S18-2821-BVT
			Carbide/Carbide/Viton	S18-2821-EVT
408	1	Casing plug	304 Stainless steel	E-363631000
412	1	Impeller gasket	Teflon	E-275476030
413	1	Sleeve gasket	Teflon	E-275476029
414	1	Sleeve gasket	Teflon	E-275476028
470	10	Casing bolt nut	304 Stainless Steel	E-M10HN



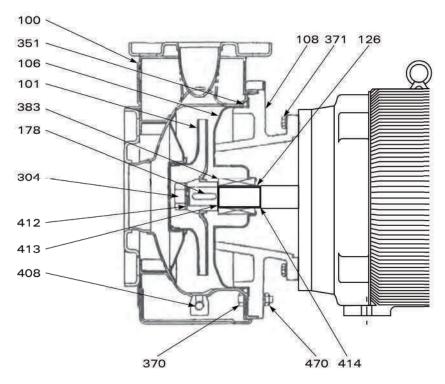


ITEM	QTY REQ'D	DESCRIPTION	MATERIAL	PART NUMBER
100	1	Casing	304 Stainless steel	E-251402205
101	1	Impeller	304 Stainless steel	E-251450874
106	1	Casing cover	304 Stainless steel	E-251438024
108	1	Adapter	C.I. (up to 184JM)	E-240080581
			C.I. (213JM and up)	E-240080582
126	1	Shaft sleeve	304 Stainless steel	E-275416013
178	1	Impeller key	Steel	E-316X316
304	1	Impeller bolt	316 SS	E-275440031
351	1	Casing o-ring	Buna	E-190X5.3B
			Viton	E-190X5.3V
370	10	Casing bolt	304 Stainless steel	E-M10X35HH
371	4	Motor bolt	Steel	E-1/2-13X1-3/4
383	1	Mechanical seal	Carbon/Ceramic/Buna	S18-2821-ABN
			Carbon/Ceramic/Viton	S18-2821-AVT
			Carbon/S.S./EPR	S18-2821-CEP
			Carbon/Carbide/Viton	S18-2821-BVT
			Carbide/Carbide/Viton	S18-2821-EVT
408	1	Casing plug	304 Stainless steel	E-363631000
412	1	Impeller gasket	Teflon	E-275476030
413	1	Sleeve gasket	Teflon	E-275476029
414	1	Sleeve gasket	Teflon	E-275476028
470	10	Casing bolt nut	304 Stainless Steel	E-M10HN



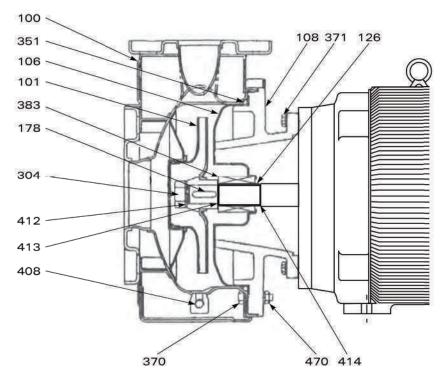


ITEM	QTY REQ'D	DESCRIPTION	MATERIAL	PART NUMBER
100	1	Casing	304 Stainless steel	E-251402206
101	1	Impeller	304 Stainless steel	E-251450875
106	1	Casing cover	304 Stainless steel	E-251402220
108	1	Adapter	C.I. (up to 184JM)	E-240080583
			C.I. (213JM and up)	E-240080584
126	1	Shaft sleeve	304 Stainless steel	E-275416013
178	1	Impeller key	Steel	E-316X316
304	1	Impeller bolt	316 SS	E-275440031
351	1	Casing o-ring	Buna	E-230X5.3B
			Viton	E-230X5.3V
370	12	Casing bolt	304 Stainless steel	E-M10X35HH
371	4	Motor bolt	Steel	E-1/2-13X1-1/2
383	1	Mechanical seal	Carbon/Ceramic/Buna	S18-2821-ABN
			Carbon/Ceramic/Viton	S18-2821-AVT
			Carbon/S.S./EPR	S18-2821-CEP
			Carbon/Carbide/Viton	S18-2821-BVT
			Carbide/Carbide/Viton	S18-2821-EVT
408	1	Casing plug	304 Stainless steel	E-363631000
412	1	Impeller gasket	Teflon	E-275476030
413	1	Sleeve gasket	Teflon	E-275476029
414	1	Sleeve gasket	Teflon	E-275476028
470	12	Casing bolt nut	304 Stainless Steel	E-M10HN



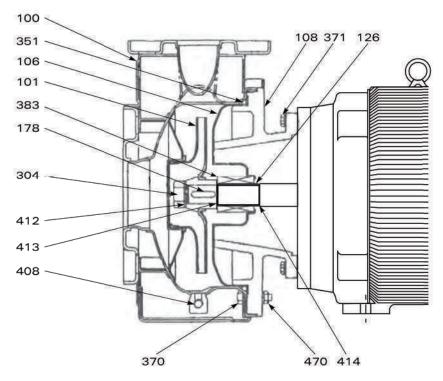


ITEM	QTY REQ'D	DESCRIPTION	MATERIAL	PART NUMBER
100	1	Casing	304 Stainless steel	E-251402206
101	1	Impeller	304 Stainless steel	E-251450876
106	1	Casing cover	304 Stainless steel	E-251402220
108	1	Adapter	C.I. (up to 184JM)	E-240080583
			C.I. (213JM and up)	E-240080584
126	1	Shaft sleeve	304 Stainless steel	E-275416013
178	1	Impeller key	Steel	E-316X316
304	1	Impeller bolt	316 SS	E-275440031
351	1	Casing o-ring	Buna	E-230X5.3B
			Viton	E-230X5.3V
370	12	Casing bolt	304 Stainless steel	E-M10X35HH
371	4	Motor bolt	Steel	E-1/2-13X1-1/2
383	1	Mechanical seal	Carbon/Ceramic/Buna	S18-2821-ABN
			Carbon/Ceramic/Viton	S18-2821-AVT
			Carbon/S.S./EPR	S18-2821-CEP
			Carbon/Carbide/Viton	S18-2821-BVT
			Carbide/Carbide/Viton	S18-2821-EVT
408	1	Casing plug	304 Stainless steel	E-363631000
412	1	Impeller gasket	Teflon	E-275476030
413	1	Sleeve gasket	Teflon	E-275476029
414	1	Sleeve gasket	Teflon	E-275476028
470	12	Casing bolt nut	304 Stainless Steel	E-M10HN



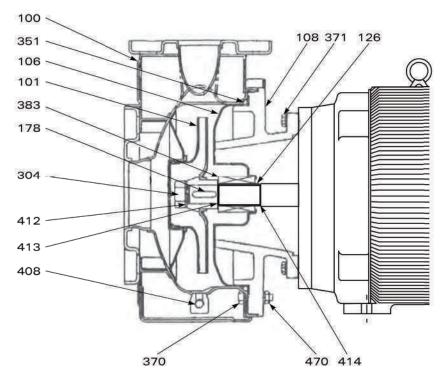


ITEM	QTY REQ'D	DESCRIPTION	MATERIAL	PART NUMBER
100	1	Casing	304 Stainless steel	E-251402207
101	1	Impeller	304 Stainless steel	E-251450877
106	1	Casing cover	304 Stainless steel	E-251438024
108	1	Adapter	C.I. (up to 184JM)	E-240080581
			C.I. (213JM and up)	E-240080582
126	1	Shaft sleeve	304 Stainless steel	E-275416013
178	1	Impeller key	Steel	E-316X316
304	1	Impeller bolt	316 SS	E-275440031
351	1	Casing o-ring	Buna	E-190X5.3B
			Viton	E-190X5.3V
370	10	Casing bolt	304 Stainless steel	E-M10X35HH
371	4	Motor bolt	Steel	E-1/2-13X1-3/4
383	1	Mechanical seal	Carbon/Ceramic/Buna	S18-2821-ABN
			Carbon/Ceramic/Viton	S18-2821-AVT
			Carbon/S.S./EPR	S18-2821-CEP
			Carbon/Carbide/Viton	S18-2821-BVT
			Carbide/Carbide/Viton	S18-2821-EVT
408	1	Casing plug	304 Stainless steel	E-363631000
412	1	Impeller gasket	Teflon	E-275476030
413	1	Sleeve gasket	Teflon	E-275476029
414	1	Sleeve gasket	Teflon	E-275476028
470	10	Casing bolt nut	304 Stainless Steel	E-M10HN



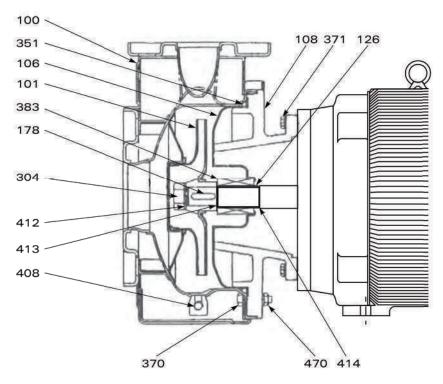


ITEM	QTY REQ'D	DESCRIPTION	MATERIAL	PART NUMBER
100	1	Casing	304 Stainless steel	E-251402207
101	1	Impeller	304 Stainless steel	E-251450878
106	1	Casing cover	304 Stainless steel	E-251438024
108	1	Adapter	C.I. (up to 184JM)	E-240080581
			C.I. (213JM and up)	E-240080582
126	1	Shaft sleeve	304 Stainless steel	E-275416013
178	1	Impeller key	Steel	E-316X316
304	1	Impeller bolt	316 SS	E-275440031
351	1	Casing o-ring	Buna	E-190X5.3B
			Viton	E-190X5.3V
370	10	Casing bolt	304 Stainless steel	E-M10X35HH
371	4	Motor bolt	Steel	E-1/2-13X1-3/4
383	1	Mechanical seal	Carbon/Ceramic/Buna	S18-2821-ABN
			Carbon/Ceramic/Viton	S18-2821-AVT
			Carbon/S.S./EPR	S18-2821-CEP
			Carbon/Carbide/Viton	S18-2821-BVT
			Carbide/Carbide/Viton	S18-2821-EVT
408	1	Casing plug	304 Stainless steel	E-363631000
412	1	Impeller gasket	Teflon	E-275476030
413	1	Sleeve gasket	Teflon	E-275476029
414	1	Sleeve gasket	Teflon	E-275476028
470	10	Casing bolt nut	304 Stainless Steel	E-M10HN



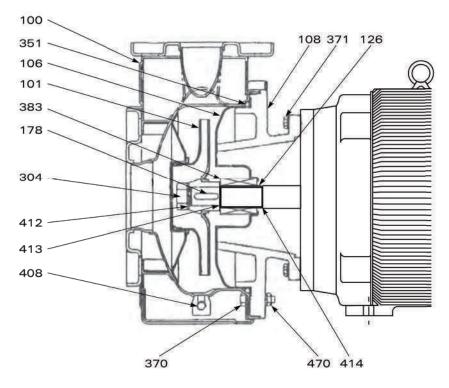


ITEM	QTY REQ'D	DESCRIPTION	MATERIAL	PART NUMBER
100	1	Casing	304 Stainless steel	E-251402208
101	1	Impeller	304 Stainless steel	E-251450879
106	1	Casing cover	304 Stainless steel	E-251402221
108	1	Adapter	C.I. (up to 184JM)	E-240080583
			C.I. (213JM and up)	E-240080584
126	1	Shaft sleeve	304 Stainless steel	E-275416013
178	1	Impeller key	Steel	E-316X316
304	1	Impeller bolt	316 SS	E-275440031
351	1	Casing o-ring	Buna	E-230X5.3B
			Viton	E-230X5.3V
370	12	Casing bolt	304 Stainless steel	E-M10X35HH
371	4	Motor bolt	Steel	E-1/2-13X1-1/2
383	1	Mechanical seal	Carbon/Ceramic/Buna	S18-2821-ABN
			Carbon/Ceramic/Viton	S18-2821-AVT
			Carbon/S.S./EPR	S18-2821-CEP
			Carbon/Carbide/Viton	S18-2821-BVT
			Carbide/Carbide/Viton	S18-2821-EVT
408	1	Casing plug	304 Stainless steel	E-363631000
412	1	Impeller gasket	Teflon	E-275476030
413	1	Sleeve gasket	Teflon	E-275476029
414	1	Sleeve gasket	Teflon	E-275476028
470	12	Casing bolt nut	304 Stainless Steel	E-M10HN



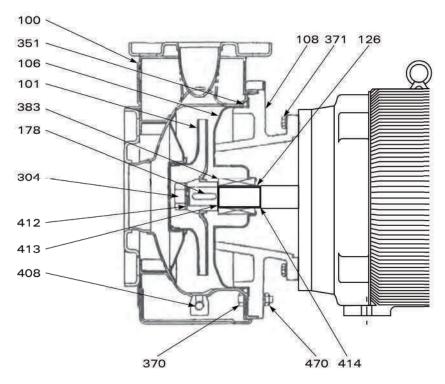


ITEM	QTY REQ'D	DESCRIPTION	MATERIAL	PART NUMBER
100	1	Casing	304 Stainless steel	E-251402208
101	1	Impeller	304 Stainless steel	E-251450880
106	1	Casing cover	304 Stainless steel	E-251402221
108	1	Adapter	C.I. (up to 184JM)	E-240080583
			C.I. (213JM and up)	E-240080584
126	1	Shaft sleeve	304 Stainless steel	E-275416013
178	1	Impeller key	Steel	E-316X316
304	1	Impeller bolt	316 SS	E-275440031
351	1	Casing o-ring	Buna	E-230X5.3B
			Viton	E-230X5.3V
370	12	Casing bolt	304 Stainless steel	E-M10X35HH
371	4	Motor bolt	Steel	E-1/2-13X1-1/2
383	1	Mechanical seal	Carbon/Ceramic/Buna	S18-2821-ABN
			Carbon/Ceramic/Viton	S18-2821-AVT
			Carbon/S.S./EPR	S18-2821-CEP
			Carbon/Carbide/Viton	S18-2821-BVT
			Carbide/Carbide/Viton	S18-2821-EVT
408	1	Casing plug	304 Stainless steel	E-363631000
412	1	Impeller gasket	Teflon	E-275476030
413	1	Sleeve gasket	Teflon	E-275476029
414	1	Sleeve gasket	Teflon	E-275476028
470	12	Casing bolt nut	304 Stainless Steel	E-M10HN



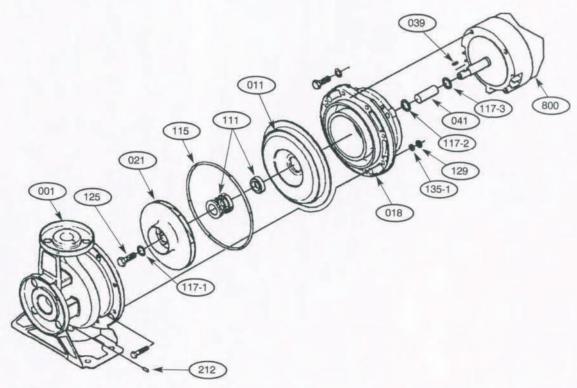


Part No.	Part Name	Material	Reg'd	Part Number
001	Casing	304L Stainless	1	251421526
011	Casing cover	304L Stainless	1	251438024
018	Bracket	Cast Iron	1	240080582
021	Impeller	304L Stainless	1	240350137
039	Key	304L Stainless	1	316X1316KEY
041	Shaft sleeve	304L Stainless	1	275416013
111	Mechanical seal	Various	1	See pump price pages
115	O-Ring	Viton	1	190X5.3ORING
117-1	Gasket	Nylon	1	275476030
117-2	Gasket	Nylon	1	275476028
117-3	Gasket	Nylon	1	275476029
125	Impeller Bolt	304L Stainless	1	275440031
160	Motor support (not shown)	Steel	1 set	271472082
212	Plug	304L Stainless	1	
800	Motor	-	1	
	Suction Flange Gasket	Viton	1	364701165
	Discharge Flange Gasket	Viton	1	364701180



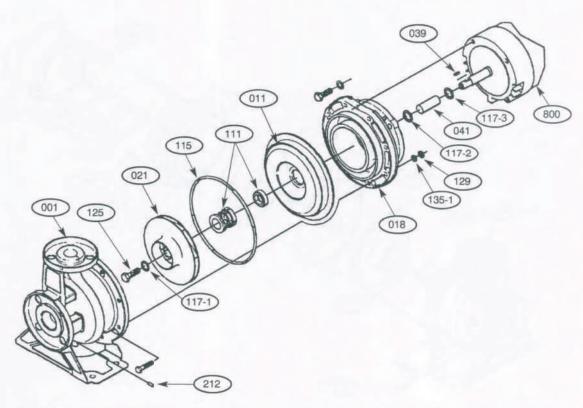


sing sing cover cket peller daft sleeve	304L Stainless 304L Stainless Cast Iron 304L Stainless 304L Stainless	1 1 1 1	251421526 251438024 240080582 240350138
cket peller r aft sleeve	Cast Iron 304L Stainless 304L Stainless	1 1 1	240080582
peller vaft sleeve	304L Stainless 304L Stainless	1	The state of the s
aft sleeve	304L Stainless	1	240350138
aft sleeve			L-10000100
		1	316X1316KEY
about the Lorent	304L Stainless	1	275416013
chanical seal	Various	1	See pump price pages
Ring	Viton	1	190X5.3ORING
sket	Nylon	1	275476030
sket	Nylon	1	275476028
sket	Nylon	1	275476029
peller Bolt	304L Stainless	1	275440031
tor support (not shown)	Steel	1 set	271472082
g	304L Stainless	1	
tor	_	1	
ction Flange Gasket	Viton	1	364701165
charge Flange Gasket	Viton	1	364701180
to	or tion Flange Gasket	or – tion Flange Gasket Viton	or – 1 tion Flange Gasket Viton 1



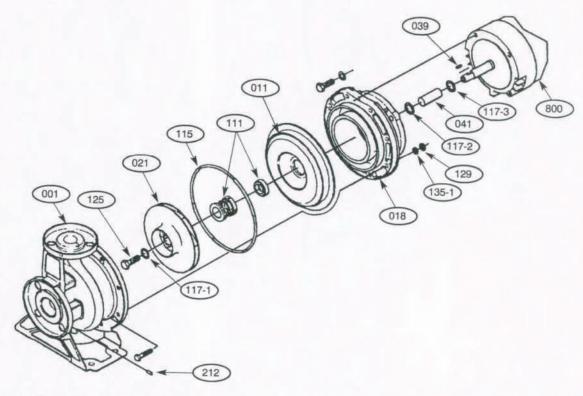


Part No.	Part Name	Material	Reg'd	Part Number
001	Casing	304L Stainless	1	251421527
011	Casing cover	304L Stainless	1	251438026
018	Bracket	Cast Iron	1	240080584
021	Impeller	304L Stainless	1	240350139
039	Key	304L Stainless	1	316X1316KEY
041	Shaft sleeve	304L Stainless	1	275416013
111	Mechanical seal	Various	1	See pump price pages
115	O-Ring	Viton	1	230X5.3ORING
117-1	Gasket	Nylon	1	275476030
117-2	Gasket	Nylon	1	275476028
117-3	Gasket	Nylon	1	275476029
125	Impeller Bolt	304L Stainless	1	275440031
160	Motor support (not shown)	Steel	1 set	271472082
212	Plug	304L Stainless	1	Z/ TH/ ZOOZ
800	Motor	_	1	
	Suction Flange Gasket	Viton	1	364701165
	Discharge Flange Gasket	Viton	1	364701180



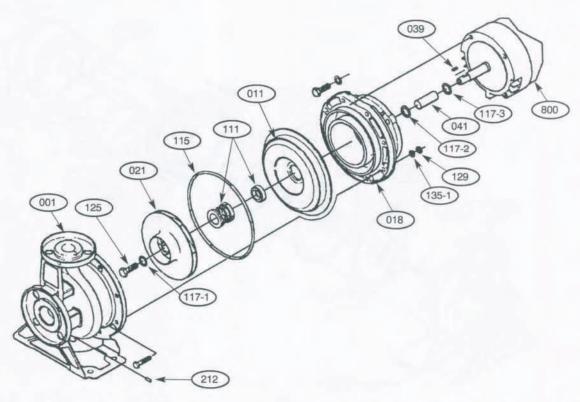


Part No.	Part Name	Material	Req'd	Part Number
001	Casing	304L Stainless	1	251421527
011	Casing cover	304L Stainless	1	251438026
018	Bracket	Cast Iron	1	240080584
021	Impeller	304L Stainless	1	240350140
039	Key	304L Stainless	1	316X1316KEY
041	Shaft sleeve	304L Stainless	1	275416013
111	Mechanical seal	Various	1	See pump price pages
115	O-Ring	Viton	1	230X5.3ORING
117-1	Gasket	Nylon	1	275476030
117-2	Gasket	Nylon	1	275476028
117-3	Gasket	Nylon	1	275476029
125	Impeller Bolt	304L Stainless	1	275440031
160	Motor support (not shown)	Steel	1 set	271472082
212	Plug	304L Stainless	1	
800	Motor	_	1	
	Suction Flange Gasket	Viton	1	364701165
	Discharge Flange Gasket	Viton	1	364701180



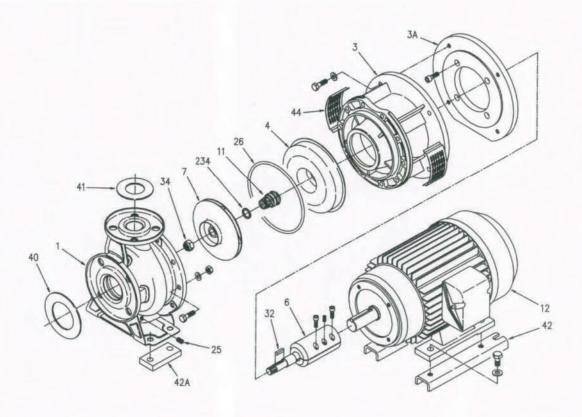


Part No.	Part Name	Material	Reg'd	Part Number
001	Casing	304L Stainless	1	251421527
003	Motor Bracket	Cast Iron	1	240080603
003A	Motor Adapter	Cast Iron	1	241410133
004	Casing Cover	304L Stainless	1	251438039
006	Coupling	Steel/Stainless	1	375449005
007	Impeller	304L Stainless	1	240350141
111	Mechanical Seal	Various	1	See pump price pages
026	O-ring	Viton	1	230X5.3ORING
032	Key	304L Stainless	1	516X516KEY
034	Impeller Nut	Stainless/Nylon	1	7/8-14LOCKNUT
040	Suction Flange Gasket	EPDM	1	364701180
041	Discharge Flange Gasket	EPDM	1	364701165
042	Motor Support	Steel	2	271472167
044	Coupling Guard	Stainless	2	271473017
234	Lip Seal	304L Stainless	1	275476039



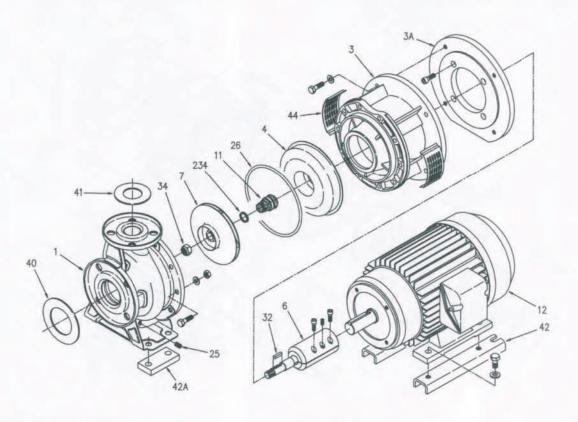


Part No.	Part Name	Material	Req'd	Part Number
001	Casing	304L Stainless	1	251421527
003	Motor Bracket	Cast Iron	1	240080603
003A	Motor Adapter	Cast Iron	1	241410134
004	Casing Cover	304L Stainless	1	251438039
006	Coupling	Steel/Stainless	1	375449005
007	Impeller	304L Stainless	1	240350142
111	Mechanical Seal	Various	1	See pump price pages
026	O-ring	Viton	1	230X5.3ORING
032	Key	304L Stainless	1	516X516KEY
034	Impeller Nut	Stainless/Nylon	1	7/8-14LOCKNUT
040	Suction Flange Gasket	EPDM	1	364701180
041	Discharge Flange Gasket	EPDM	1	364701165
042A	Casing Support	Steel	2	271472170
044	Coupling Guard	Stainless	2	271473017
234	Lip Seal	304L Stainless	1	275476039



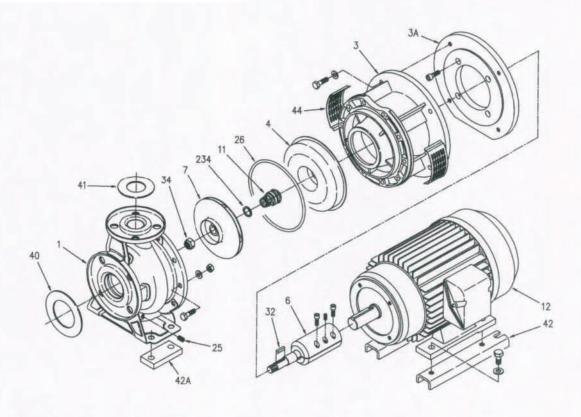


Part Name	Material	Reg'd	Part Number
Casing	304L Stainless	1	251421528
Motor Bracket	Cast Iron	1	240080603
Motor Adapter	Cast Iron	1	241410133
Casing Cover	304L Stainless	1	251438039
Coupling	Steel/Stainless	1	375449005
Impeller	304L Stainless	1	240350143
Mechanical Seal	Various	1	See pump price pages
O-ring	Viton	1	230X5.3ORING
Key	304L Stainless	1	516X516KEY
Impeller Nut	Stainless/Nylon	1	7/8-14LOCKNUT
Suction Flange Gasket	EPDM	1	364701180
Discharge Flange Gasket	EPDM	1	364701165
Motor Support	Steel	2	271472169
Coupling Guard	Stainless	2	271473017
Lip Seal	304L Stainless	1	275476039
	Casing Motor Bracket Motor Adapter Casing Cover Coupling Impeller Mechanical Seal O-ring Key Impeller Nut Suction Flange Gasket Discharge Flange Gasket Motor Support Coupling Guard	Casing 304L Stainless Motor Bracket Cast Iron Motor Adapter Cast Iron Casing Cover 304L Stainless Coupling Steel/Stainless Impeller 304L Stainless Mechanical Seal Various O-ring Viton Key 304L Stainless Impeller Nut Stainless Impeller Nut Stainless Suction Flange Gasket EPDM Discharge Flange Gasket EPDM Motor Support Steel Coupling Guard Stainless	Casing 304L Stainless 1 Motor Bracket Cast Iron 1 Motor Adapter Cast Iron 1 Casing Cover 304L Stainless 1 Coupling Steel/Stainless 1 Impeller 304L Stainless 1 Mechanical Seal Various 1 O-ring Viton 1 Key 304L Stainless 1 Impeller Nut Stainless/Nylon 1 Suction Flange Gasket EPDM 1 Discharge Flange Gasket EPDM 1 Motor Support Steel 2 Coupling Guard Stainless 2



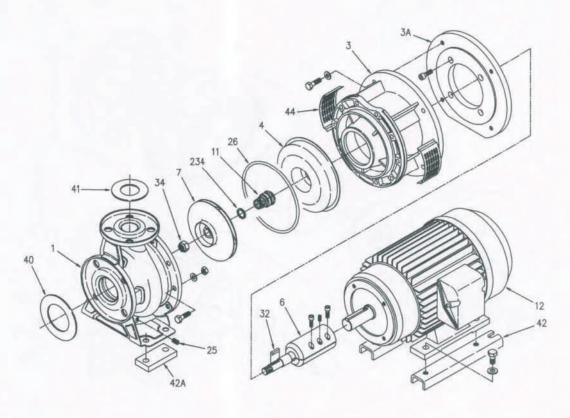

Part No.	Part Name	Material	Req'd	Part Number
001	Casing	304L Stainless	1	251421528
003	Motor Bracket	Cast Iron	1	240080603
003A	Motor Adapter	Cast Iron	1	241410134
004	Casing Cover	304L Stainless	1	251438039
006	Coupling	Steel/Stainless	1	375449005
007	Impeller	304L Stainless	1	240350144
111	Mechanical Seal	Various	1	See pump price pages
026	O-ring	Viton	1	230X5.3ORING
032	Key	304L Stainless	1	516X516KEY
034	Impeller Nut	Stainless/Nylon	1	7/8-14LOCKNUT
040	Suction Flange Gasket	EPDM	1	364701180
041	Discharge Flange Gasket	EPDM	1	364701165
042	Motor Support	Steel	2	271472168
044	Coupling Guard	Stainless	2	271473017
234	Lip Seal	304L Stainless	1	275476039




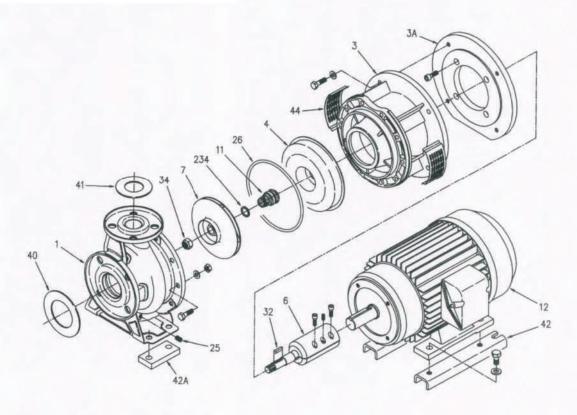

Part No.	Part Name	Material	Reg'd	Part Number
001	Casing	304L Stainless	1	251421528
003	Motor Bracket	Cast Iron	1	240080603
003A	Motor Adapter	Cast Iron	1	241410134
004	Casing Cover	304L Stainless	1	251438039
006	Coupling	Steel/Stainless	1	375449005
007	Impeller	304L Stainless	1	240350145
111	Mechanical Seal	Various	1	See pump price pages
026	O-ring	Viton	1	230X5.3ORING
032	Key	304L Stainless	1	516X516KEY
034	Impeller Nut	Stainless/Nylon	1	7/8-14LOCKNUT
040	Suction Flange Gasket	EPDM	1	364701180
041	Discharge Flange Gasket	EPDM	1	364701165
042	Motor Support	Steel	2	271472168
044	Coupling Guard	Stainless	2	271473017
234	Lip Seal	304L Stainless	1	275476039



CUSTOMER REF	OUR REF
	VOLTAGE ENCL
CERTIFIED -	DATE -

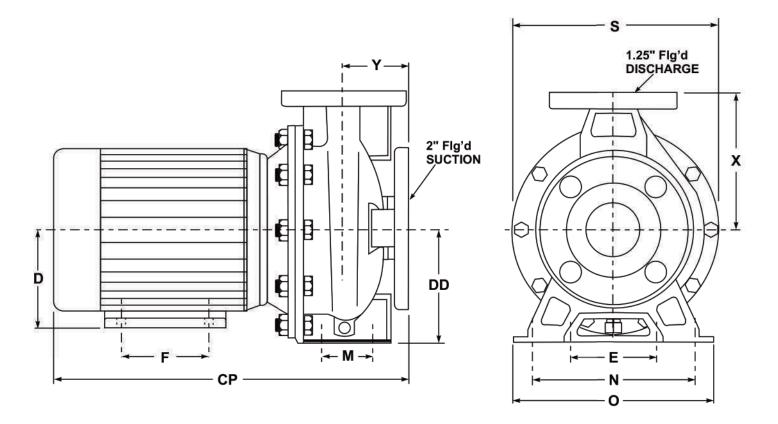


	DIMENSIONS												
MOTOR FRAME	CP*	F	E**	D	DD	М	N	0	S	Χ	Υ	PUMP	MOTOR
143JM	16.75	4.0	5.5	3.50	4.44	2.75	5.5	7.5	8.38	5.5	3.12	20	44
145JM	17.75	5.0	5.5	3.50	4.44	2.75	5.5	7.5	8.38	5.5	3.12	20	44
182JM	18.50	4.5	7.5	4.50	4.44	2.75	5.5	7.5	8.38	5.5	3.12	20	90
184JM	19.50	5.5	7.5	4.50	4.44	2.75	5.5	7.5	8.38	5.5	3.12	20	110
213JM	21.25	5.5	8.5	5.25	4.44	2.75	5.5	7.5	8.38	5.5	3.12	20	120
215JM	22.75	7.0	8.5	5.25	4.44	2.75	5.5	7.5	8.38	5.5	3.12	20	160

- All dimensions in inches.
- Some dimensions may vary +/- 0.25 inches.
- * Approximate only. ** Motor mount hole spacing.



CUSTOMER	OUR REF
	LTAGE ENCL
CERTIFIED -	DATE

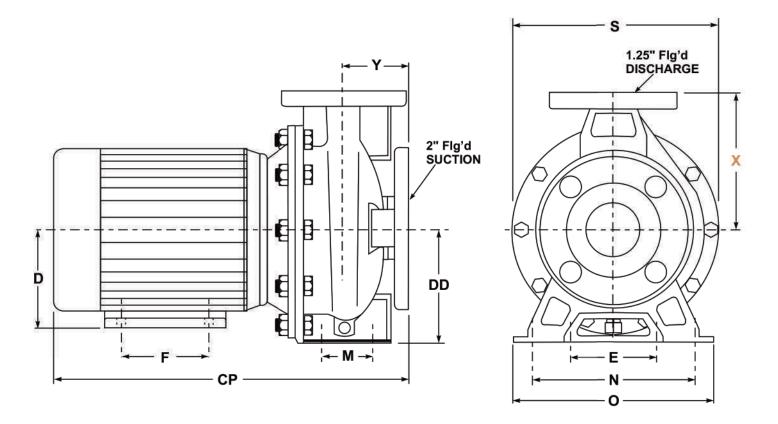


	DIMENSIONS												
MOTOR FRAME	CP*	F	E**	D	DD	М	N	0	S	Х	Υ	PUMP	MOTOR
143JM	16.75	4.0	5.5	3.50	5.19	2.75	7.5	9.44	10	6.31	3.12	20	44
145JM	17.75	5.0	5.5	3.50	5.19	2.75	7.5	9.44	10	6.31	3.12	20	44
182JM	18.50	4.5	7.5	4.50	5.19	2.75	7.5	9.44	10	6.31	3.12	20	90
184JM	19.50	5.5	7.5	4.50	5.19	2.75	7.5	9.44	10	6.31	3.12	20	110
213JM	21.25	5.5	8.5	5.25	5.19	2.75	7.5	9.44	10	6.31	3.12	20	120
215JM	22.75	7.0	8.5	5.25	5.19	2.75	7.5	9.44	10	6.31	3.12	20	160

- All dimensions in inches.
- Some dimensions may vary +/- 0.25 inches.
- * Approximate only.
- ** Motor mount hole spacing.



	OUR REF
	VOLTAGE ENCL
CERTIFIED -	DATE -

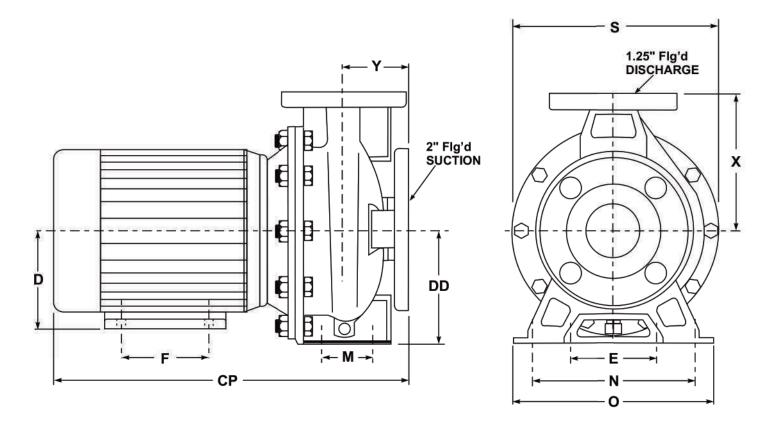


	DIMENSIONS												
MOTOR FRAME	CP*	F	E**	D	DD	М	N	0	S	Х	Υ	PUMP	MOTOR
143JM	16.75	4.0	5.5	3.50	5.19	2.75	7.5	9.44	10	6.31	3.12	20	44
145JM	17.75	5.0	5.5	3.50	5.19	2.75	7.5	9.44	10	6.31	3.12	20	44
182JM	18.50	4.5	7.5	4.50	5.19	2.75	7.5	9.44	10	6.31	3.12	20	90
184JM	19.50	5.5	7.5	4.50	5.19	2.75	7.5	9.44	10	6.31	3.12	20	110
213JM	21.25	5.5	8.5	5.25	5.19	2.75	7.5	9.44	10	6.31	3.12	20	120
215JM	22.75	7.0	8.5	5.25	5.19	2.75	7.5	9.44	10	6.31	3.12	20	160

- All dimensions in inches.
- Some dimensions may vary +/- 0.25 inches.
- * Approximate only. ** Motor mount hole spacing.



	OUR REF
	VOLTAGE ENCL
CERTIFIED -	DATE -

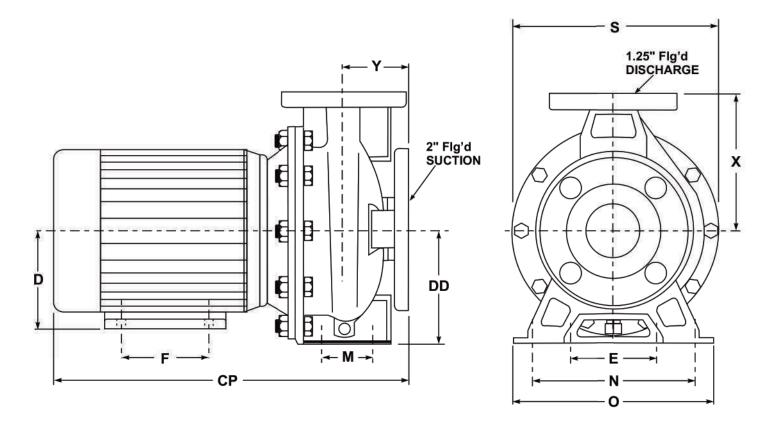


	DIMENSIONS												
MOTOR FRAME	CP*	F	E**	D	DD	М	N	0	S	Х	Υ	PUMP	MOTOR
143JM	19.00	4.0	5.5	3.50	6.31	2.75	7.5	9.44	11.56	7.06	3.12	20	44
145JM	20.00	5.0	5.5	3.50	6.31	2.75	7.5	9.44	11.56	7.06	3.12	20	44
182JM	21.75	4.5	7.5	4.50	6.31	2.75	7.5	9.44	11.56	7.06	3.12	20	90
184JM	22.75	5.5	7.5	4.50	6.31	2.75	7.5	9.44	11.56	7.06	3.12	20	110
213JM	24.50	5.5	8.5	5.25	6.31	2.75	7.5	9.44	11.56	7.06	3.12	20	120
215JM	26.00	7.0	8.5	5.25	6.31	2.75	7.5	9.44	11.56	7.06	3.12	20	160

- All dimensions in inches.
- Some dimensions may vary +/- 0.25 inches.
- * Approximate only.
- ** Motor mount hole spacing.



	OUR REF
	VOLTAGE ENCL
CERTIFIED -	DATE -

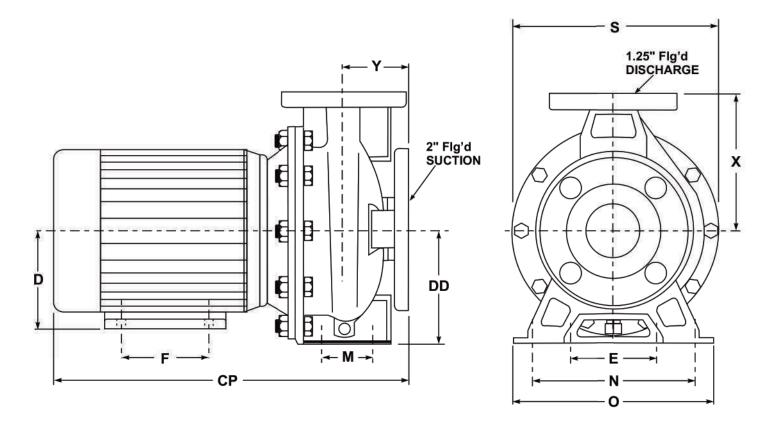

	DIMENSIONS												
MOTOR FRAME	CP*	F	E**	D	DD	М	N	0	S	Х	Υ	PUMP	MOTOR
143JM	19.00	4.0	5.5	3.50	6.31	2.75	7.5	9.44	11.56	7.06	3.12	20	44
145JM	20.00	5.0	5.5	3.50	6.31	2.75	7.5	9.44	11.56	7.06	3.12	20	44
182JM	21.75	4.5	7.5	4.50	6.31	2.75	7.5	9.44	11.56	7.06	3.12	20	90
184JM	22.75	5.5	7.5	4.50	6.31	2.75	7.5	9.44	11.56	7.06	3.12	20	110
213JM	24.50	5.5	8.5	5.25	6.31	2.75	7.5	9.44	11.56	7.06	3.12	20	120
215JM	26.00	7.0	8.5	5.25	6.31	2.75	7.5	9.44	11.56	7.06	3.12	20	160

NOTES - Not for construction purposes unless certified above.


- All dimensions in inches.

- Some dimensions may vary +/- 0.25 inches.

- * Approximate only. - ** Motor mount hole spacing.



	OUR REF
	VOLTAGE ENCL
CERTIFIED -	DATE -

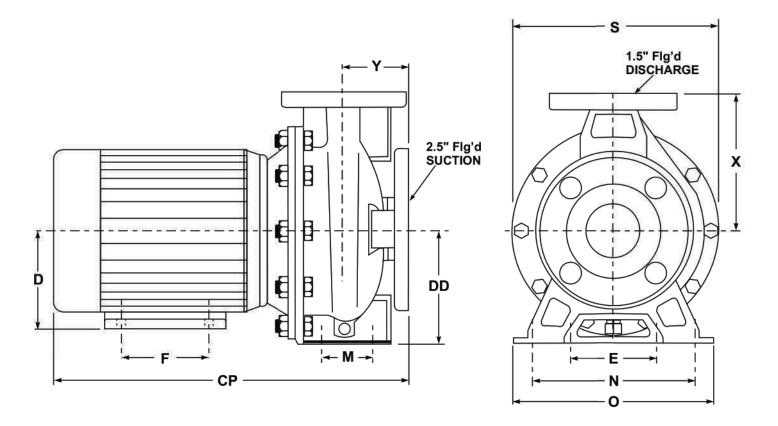


	DIMENSIONS												
MOTOR FRAME	CP*	F	E**	D	DD	М	N	0	S	Х	Υ	PUMP	MOTOR
143JM	16.75	4.0	5.5	3.50	4.44	2.75	6.31	8.25	8.75	5.5	3.12	21	44
145JM	17.75	5.0	5.5	3.50	4.44	2.75	6.31	8.25	8.75	5.5	3.12	21	44
182JM	18.50	4.5	7.5	4.50	4.44	2.75	6.31	8.25	8.75	5.5	3.12	21	90
184JM	19.50	5.5	7.5	4.50	4.44	2.75	6.31	8.25	8.75	5.5	3.12	21	110
213JM	21.25	5.5	8.5	5.25	4.44	2.75	6.31	8.25	8.75	5.5	3.12	21	120
215JM	22.75	7.0	8.5	5.25	4.44	2.75	6.31	8.25	8.75	5.5	3.12	21	160

- All dimensions in inches.
- Some dimensions may vary +/- 0.25 inches.
- * Approximate only.
- ** Motor mount hole spacing.



	OUR REF
	VOLTAGE ENCL
CERTIFIED -	DATE -

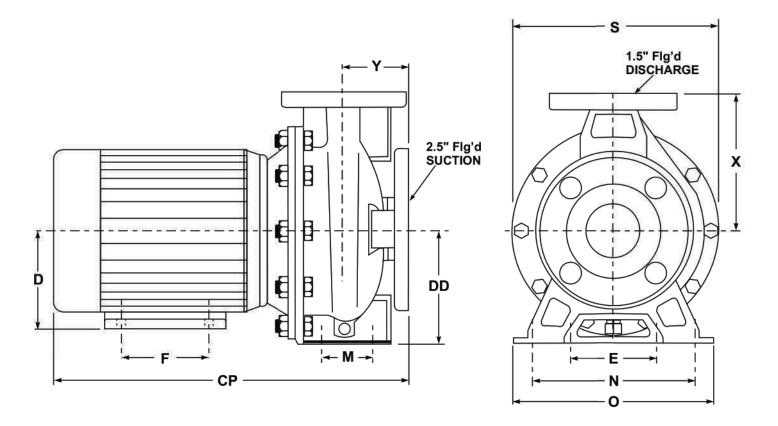


DIMENSIONS											WEIGHT (lbs)		
MOTOR FRAME	CP*	F	E**	D	DD	М	N	0	S	Х	Υ	PUMP	MOTOR
143JM	16.75	4.0	5.5	3.50	4.44	2.75	6.31	8.25	8.75	5.5	3.12	21	44
145JM	17.75	5.0	5.5	3.50	4.44	2.75	6.31	8.25	8.75	5.5	3.12	21	44
182JM	18.50	4.5	7.5	4.50	4.44	2.75	6.31	8.25	8.75	5.5	3.12	21	90
184JM	19.50	5.5	7.5	4.50	4.44	2.75	6.31	8.25	8.75	5.5	3.12	21	110
213JM	21.25	5.5	8.5	5.25	4.44	2.75	6.31	8.25	8.75	5.5	3.12	21	120
215JM	22.75	7.0	8.5	5.25	4.44	2.75	6.31	8.25	8.75	5.5	3.12	21	160

- All dimensions in inches.
- Some dimensions may vary +/- 0.25 inches.
- * Approximate only.
- ** Motor mount hole spacing.



		2		S ₄
		VOLTAGE -		
CERTIF	FIFD -		DATE	=

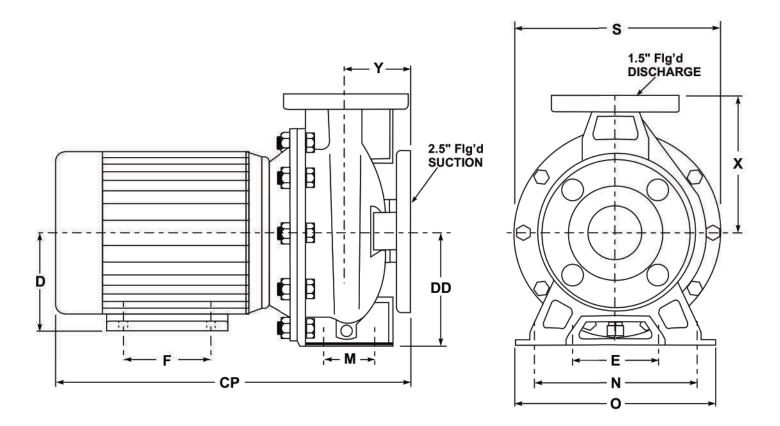


DIMENSIONS											WEIGHT (lbs)		
MOTOR FRAME	CP*	F	E**	D	DD	М	N	0	S	Х	Υ	PUMP	MOTOR
143JM	16.75	4.0	5.5	3.50	5.19	2.75	7.5	9.44	10	6.31	3.12	21	44
145JM	17.75	5.0	5.5	3.50	5.19	2.75	7.5	9.44	10	6.31	3.12	21	44
182JM	18.50	4.5	7.5	4.50	5.19	2.75	7.5	9.44	10	6.31	3.12	21	90
184JM	19.50	5.5	7.5	4.50	5.19	2.75	7.5	9.44	10	6.31	3.12	21	110
213JM	21.25	5.5	8.5	5.25	5.19	2.75	7.5	9.44	10	6.31	3.12	21	120
215JM	22.75	7.0	8.5	5.25	5.19	2.75	7.5	9.44	10	6.31	3.12	21	160

- All dimensions in inches.
- Some dimensions may vary +/- 0.25 inches.
- * Approximate only.
- ** Motor mount hole spacing.



	OUR REF
	VOLTAGE ENCL
CERTIFIED -	DATE -

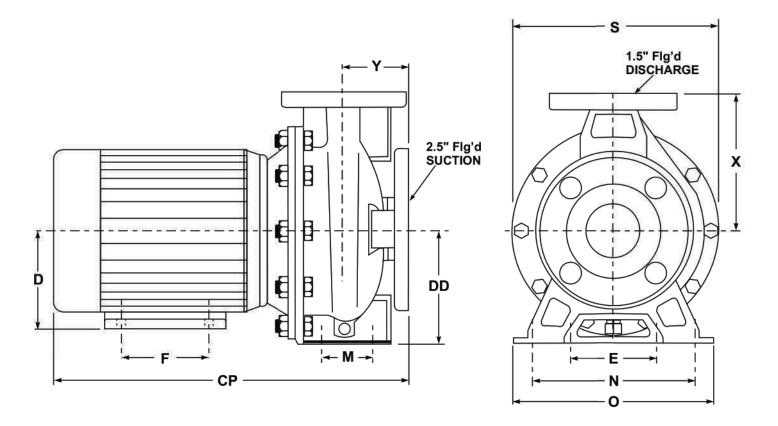


DIMENSIONS											WEIGHT (lbs)		
MOTOR FRAME	CP*	F	E**	D	DD	М	N	0	S	Х	Υ	PUMP	MOTOR
143JM	16.75	4.0	5.5	3.50	5.19	2.75	7.5	9.44	10	6.31	3.12	21	44
145JM	17.75	5.0	5.5	3.50	5.19	2.75	7.5	9.44	10	6.31	3.12	21	44
182JM	18.50	4.5	7.5	4.50	5.19	2.75	7.5	9.44	10	6.31	3.12	21	90
184JM	19.50	5.5	7.5	4.50	5.19	2.75	7.5	9.44	10	6.31	3.12	21	110
213JM	21.25	5.5	8.5	5.25	5.19	2.75	7.5	9.44	10	6.31	3.12	21	120
215JM	22.75	7.0	8.5	5.25	5.19	2.75	7.5	9.44	10	6.31	3.12	21	160

- All dimensions in inches.
- Some dimensions may vary +/- 0.25 inches.
- * Approximate only.
- ** Motor mount hole spacing.



CUSTO	MER REF	2	OUR REF	Si-
HP	RPM	VOLTAGE -		ENCL
CERTI	FIFD -		DATE	=

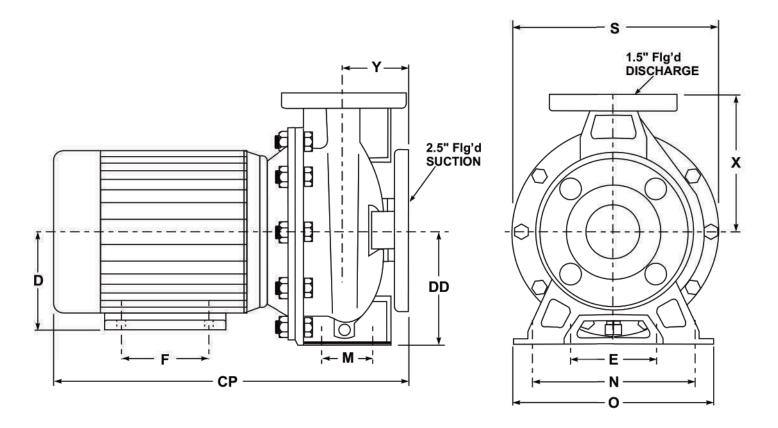


				DIME	ENSIO	NS						WEIGHT (lbs)	
MOTOR FRAME	CP*	F	E**	D	DD	М	N	0	S	Χ	Υ	PUMP	MOTOR
143JM	17.75	4.0	5.5	3.50	6.31	2.75	8.38	10.44	11.56	7.06	3.94	21	44
145JM	18.75	5.0	5.5	3.50	6.31	2.75	8.38	10.44	11.56	7.06	3.94	21	44
182JM	19.50	4.5	7.5	4.50	6.31	2.75	8.38	10.44	11.56	7.06	3.94	21	90
184JM	20.50	5.5	7.5	4.50	6.31	2.75	8.38	10.44	11.56	7.06	3.94	21	110
213JM	22.25	5.5	8.5	5.25	6.31	2.75	8.38	10.44	11.56	7.06	3.94	21	120
215JM	23.75	7.0	8.5	5.25	6.31	2.75	8.38	10.44	11.56	7.06	3.94	21	160

- All dimensions in inches.
- Some dimensions may vary +/- 0.25 inches.
- * Approximate only.
- ** Motor mount hole spacing.



CUSTON	IER REF	3	OUR REF	§
		VOLTAGE -		
CERTIE	IFD -		DATE	3 _ 0

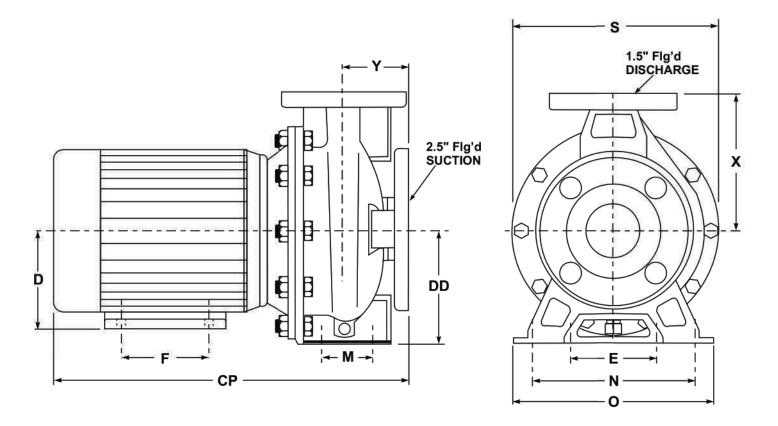


				DIME	ENSIO	NS						WEIGHT (lbs)	
MOTOR FRAME	CP*	F	E**	D	DD	М	N	0	S	Χ	Υ	PUMP	MOTOR
143JM	17.75	4.0	5.5	3.50	6.31	2.75	8.38	10.44	11.56	7.06	3.94	21	44
145JM	18.75	5.0	5.5	3.50	6.31	2.75	8.38	10.44	11.56	7.06	3.94	21	44
182JM	19.50	4.5	7.5	4.50	6.31	2.75	8.38	10.44	11.56	7.06	3.94	21	90
184JM	20.50	5.5	7.5	4.50	6.31	2.75	8.38	10.44	11.56	7.06	3.94	21	110
213JM	22.25	5.5	8.5	5.25	6.31	2.75	8.38	10.44	11.56	7.06	3.94	21	120
215JM	23.75	7.0	8.5	5.25	6.31	2.75	8.38	10.44	11.56	7.06	3.94	21	160

- All dimensions in inches.
- Some dimensions may vary +/- 0.25 inches.
- * Approximate only.
- ** Motor mount hole spacing.



CUSTOMER	R REF	 OUR REF	
		EN	
CERTIFIE	D -	DATE -	

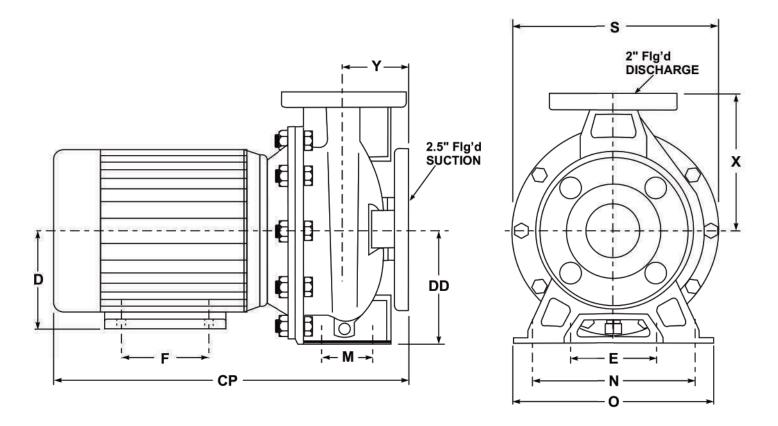


				DIME	ENSIO	NS						WEIGHT (lbs)		
MOTOR FRAME	CP*	F	E**	D	DD	М	N	0	S	Х	Υ	PUMP	MOTOR	
143JM	17.75	4.0	5.5	3.50	5.19	2.75	7.5	9.44	10	6.31	3.94	22	44	
145JM	18.75	5.0	5.5	3.50	5.19	2.75	7.5	9.44	10	6.31	3.94	22	44	
182JM	19.50	4.5	7.5	4.50	5.19	2.75	7.5	9.44	10	6.31	3.94	22	90	
184JM	20.50	5.5	7.5	4.50	5.19	2.75	7.5	9.44	10	6.31	3.94	22	110	
213JM	22.25	5.5	8.5	5.25	5.19	2.75	7.5	9.44	10	6.31	3.94	22	120	
215JM	23.75	7.0	8.5	5.25	5.19	2.75	7.5	9.44	10	6.31	3.94	22	160	

- All dimensions in inches.
- Some dimensions may vary +/- 0.25 inches.
- * Approximate only. ** Motor mount hole spacing.



	OUR REF
	VOLTAGE ENCL
CERTIFIED -	DATE -

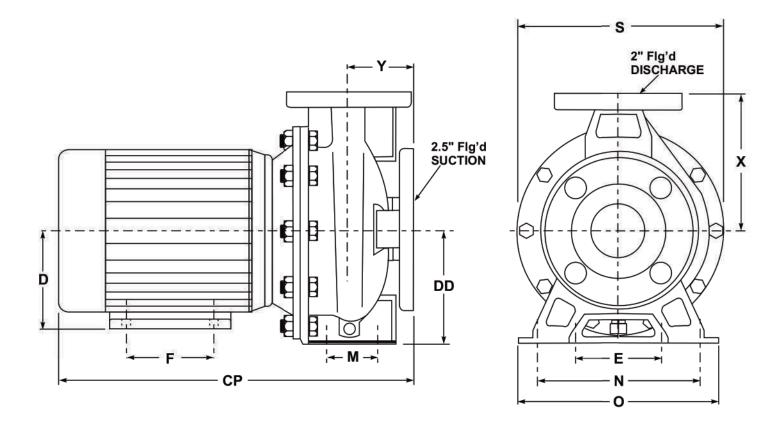

				DIME	ENSIO	NS						WEIGHT (lbs)	
MOTOR FRAME	CP*	F	E**	D	DD	М	N	0	S	Х	Υ	PUMP	MOTOR
143JM	17.75	4.0	5.5	3.50	5.19	2.75	7.5	9.44	10	6.31	3.94	22	44
145JM	18.75	5.0	5.5	3.50	5.19	2.75	7.5	9.44	10	6.31	3.94	22	44
182JM	19.50	4.5	7.5	4.50	5.19	2.75	7.5	9.44	10	6.31	3.94	22	90
184JM	20.50	5.5	7.5	4.50	5.19	2.75	7.5	9.44	10	6.31	3.94	22	110
213JM	22.25	5.5	8.5	5.25	5.19	2.75	7.5	9.44	10	6.31	3.94	22	120
215JM	23.75	7.0	8.5	5.25	5.19	2.75	7.5	9.44	10	6.31	3.94	22	160

NOTES - Not for construction purposes unless certified above.


- All dimensions in inches.

- Some dimensions may vary +/- 0.25 inches.

- * Approximate only. - ** Motor mount hole spacing.



	OUR REF
	VOLTAGE ENCL
CERTIFIED -	DATE -

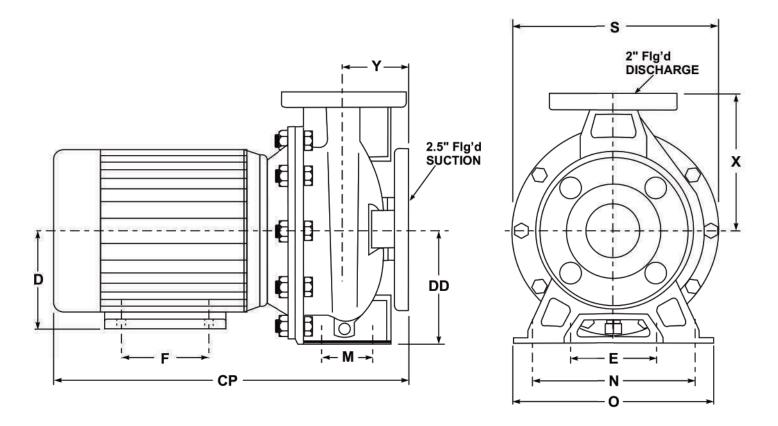


				DIME	ENSIO	NS						WEIGHT (lbs)		
MOTOR FRAME	CP*	F	E**	D	DD	М	N	0	S	Х	Υ	PUMP	MOTOR	
143JM	17.75	4.0	5.5	3.50	6.31	2.75	8.38	10.44	11.69	7.06	3.94	22	44	
145JM	18.75	5.0	5.5	3.50	6.31	2.75	8.38	10.44	11.69	7.06	3.94	22	44	
182JM	19.50	4.5	7.5	4.50	6.31	2.75	8.38	10.44	11.69	7.06	3.94	22	90	
184JM	20.50	5.5	7.5	4.50	6.31	2.75	8.38	10.44	11.69	7.06	3.94	22	110	
213JM	22.25	5.5	8.5	5.25	6.31	2.75	8.38	10.44	11.69	7.06	3.94	22	120	
215JM	23.75	7.0	8.5	5.25	6.31	2.75	8.38	10.44	11.69	7.06	3.94	22	160	

- All dimensions in inches.
- Some dimensions may vary +/- 0.25 inches.
- * Approximate only. ** Motor mount hole spacing.



CUSTOMER	R REF	 OUR REF	
		EN	
CERTIFIE	D -	DATE -	

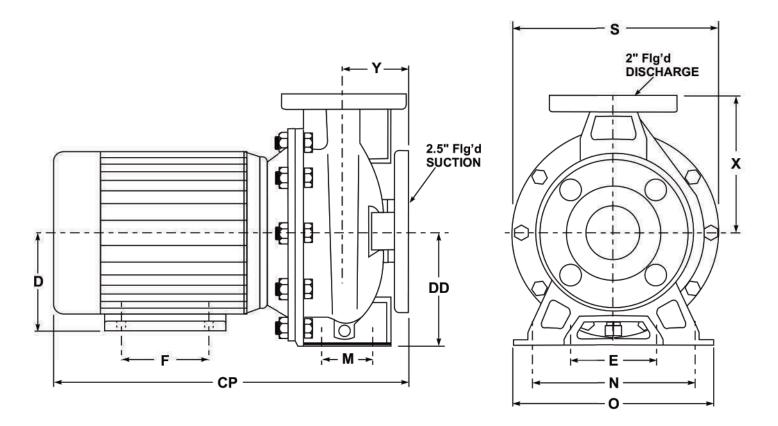


				DIME	ENSIO	NS						WEIGHT (lbs)		
MOTOR FRAME	CP*	F	E**	D	DD	М	N	0	S	Х	Υ	PUMP	MOTOR	
143JM	17.75	4.0	5.5	3.50	6.31	2.75	8.38	10.44	11.69	7.06	3.94	22	44	
145JM	18.75	5.0	5.5	3.50	6.31	2.75	8.38	10.44	11.69	7.06	3.94	22	44	
182JM	19.50	4.5	7.5	4.50	6.31	2.75	8.38	10.44	11.69	7.06	3.94	22	90	
184JM	20.50	5.5	7.5	4.50	6.31	2.75	8.38	10.44	11.69	7.06	3.94	22	110	
213JM	22.25	5.5	8.5	5.25	6.31	2.75	8.38	10.44	11.69	7.06	3.94	22	120	
215JM	23.75	7.0	8.5	5.25	6.31	2.75	8.38	10.44	11.69	7.06	3.94	22	160	

- All dimensions in inches.
- Some dimensions may vary +/- 0.25 inches.
- * Approximate only.
- ** Motor mount hole spacing.



SERIES PS - DIMENSIONAL OUTLINE MODEL - PSF3001 thru PSF3004

CUSTOMER REF		OUR REE	
HP RPM	VOLTAGE -	OOK KEI, I	ENCL
CERTIFIED		DATE	

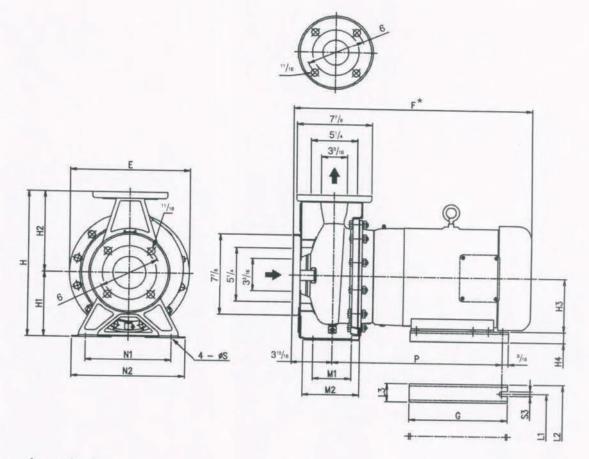

Dimensions: inch

MODEL	SIZE	TYPE	E	F	G	Н	H	Ha	H	He	L	L	L	M.	M ₂	N.	N ₂	P	S	Sa
PSF3001/7.5	21/2 x 3 x 47/6	1	10	233/16	99/16	133/6	65/16	71/16				101/4		33/4	51/4	R0/a		169/16	_	100
PSF3002/10	21/2 x 3 x 55/16	1	10	233/10	99/16	133/6	65/16	71/10	51/4	11/16	81/2	101/4	13/4	33/4	51/2	B3/a		169/16	3.877	1-
PSF3003/10	21/2 x 3 x 53/8					143/16						101/4						16%		17
PSF3004/15	21/2 x 3 x 57/n	1	115/6	233/16	99/16	143/16	65/16					101/4						169/16	-	1-


NOTES - Not for construction purposes unless certified above.

All dimensions in inches.
 * Approximate only.



SERIES PS - DIMENSIONAL OUTLINE MODEL - PSF3005 thru PSF3009

CUSTOM	ER REF		OUR REF	
HP	_ RPM	VOLTAGE -		
CERTIF	ED		DATE	

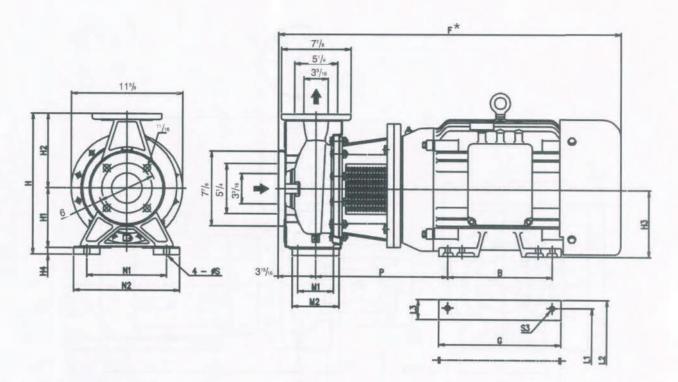

Dimensions: inch


MODEL	SIZE	TYPE	В	F	G	Н	H	Ha	Ha	He	L	Lz	L	Mı	Ma	N ₁	N ₂	P	S	Sa
PSF3005/20	21/2 x 3 x 65/16	3	10	323/8	115/s	143/18	65/16	7º/s	61/4	1/16	10	123/4	23/8	33/4	51/2	83/5	11	1313/16		17/30
PSF3006/25	21/2 x 3 x 67/e	3	11	36	1213/16	147/4	65/16	77/a	7	11/16	11	123/4	_	33/4	415/16	8º/s	111/0	137/4	9/16	17/30
PSF3007/20	21/2 x 3 x 63/4	3	3/4	323/8	139/16	1515/16	71/16	87/8	61/4	13/16	10	123/8	23/8	33/4	51/2	913/18	125/a	25 ¹² /18		9/16
PSF3008/25	21/2 x 3 x 71/16	3	11	36	13	1515/16	71/18	8 ⁷ /e	7	1/16	11	1215/16	115/16	33/4		912/16	12º/a	137/a	9/10	17/30
PSF3009/30	21/2 x 3 x 71/2	3	11	36	13	1515/16	71/16	87/s	7	1/16	11	1215/16	115/16	33/4	-		III.	137/4	9/16	17/3

NOTES - Not for construction purposes unless certified above.
- All dimensions in inches.
- * Approximate only.



CUSTO	MER		
CUSTO	MER REF	OUR R	EF
HP	RPM	VOLTAGE	ENCL

CERTIFIED - _ DATE - _____

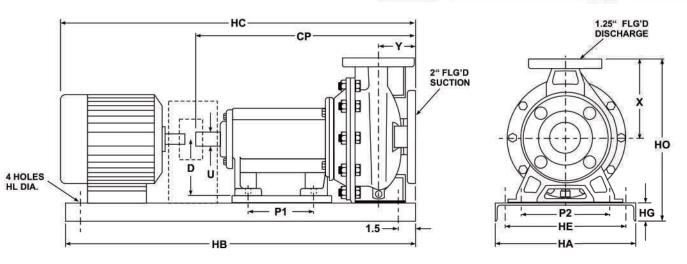

						DIM	ENSI	ONS							WE	IGHT (lb	s)*
MOTOR FRAME	HA	НВ	HL	HC*	но	HG	HE	CP	P1	P2	D**	U	X	Y	PUMP	MOTOR	ASS'Y
56	10	35	0.62	33.0	13.38	2.62	7.0	20.5	5.75	5.62	5.25	1.25	5.50	3.12	80	30	155
143T	10	35	0.62	34.0	13.38	2.62	7.0	20.5	5.75	5.62	5.25	1.25	5.50	3.12	80	40	165
145T	10	35	0.62	34.0	13.38	2.62	7.0	20.5	5.75	5.62	5.25	1.25	5.50	3.12	80	40	165
182T	10	35	0.62	35.0	13.38	2.62	7.0	20.5	5.75	5.62	5.25	1.25	5.50	3.12	80	80	205
184T	10	35	0.62	35.0	13.38	2.62	7.0	20.5	5.75	5.62	5.25	1.25	5.50	3.12	80	80	205
									-				-				
										1					i :		

NOTES - Not for construction purposes unless certified above.


- All dimensions in inches. Some dimensions may vary +/- 0.25 inches.
- Approximate only.
 Shaft centerline to underside of frame feet.

FORM PS00940 January 03



CUSTO	MER		
CUSTO	MER REF	OUR R	EF
HP	RPM	VOLTAGE	ENCL

CERTIFIED - __ DATE - _____

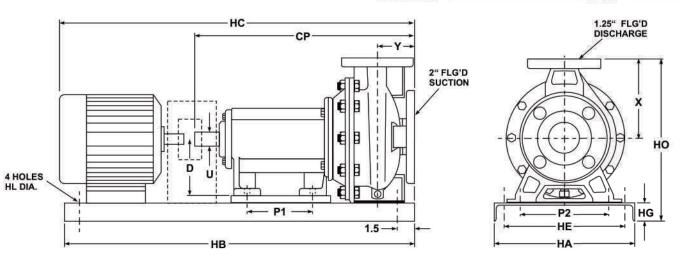

						DIM	ENSI	ONS							WE	IGHT (lb	s)*
MOTOR FRAME	HA	НВ	HL	HC*	но	HG	HE	CP	P1	P2	D**	U	X	Y	PUMP	MOTOR	ASS'Y
56	10	35	0.62	33.0	14.81	2.62	7.0	20.5	5.75	5.62	5.25	1.25	6.31	3.12	80	30	155
143T	10	35	0.62	34.0	14.81	2.62	7.0	20.5	5.75	5.62	5.25	1.25	6.31	3.12	80	40	165
145T	10	35	0.62	34.0	14.81	2.62	7.0	20.5	5.75	5.62	5.25	1.25	6.31	3.12	80	40	165
182T	10	35	0.62	35.0	14.81	2.62	7.0	20.5	5.75	5.62	5.25	1.25	6.31	3.12	80	80	205
184T	10	35	0.62	35.0	14.81	2.62	7.0	20.5	5.75	5.62	5.25	1.25	6.31	3.12	80	80	205
												-	-				

NOTES - Not for construction purposes unless certified above.


- All dimensions in inches. Some dimensions may vary +/- 0.25 inches.
- * Approximate only.
 ** Shaft centerline to underside of frame feet.

FORM PS00950 January 03



CUSTO	MER REF	OUR	REF
HP	RPM	VOLTAGE	ENCL

CERTIFIED - __ DATE - _____

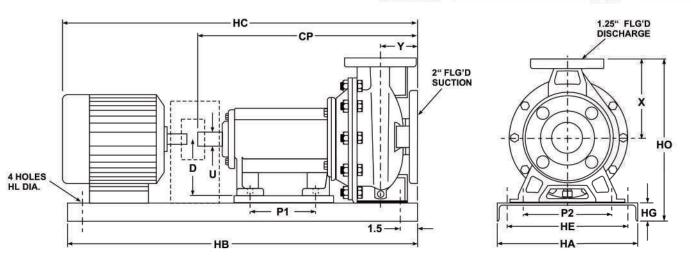

						DIM	ENSI	ONS							WE	IGHT (lb	s)*
MOTOR FRAME	HA	НВ	HL	HC*	но	HG	HE	CP	P1	P2	D**	U	X	Y	PUMP	MOTOR	ASS'Y
56	10	35	0.62	33.0	14.81	2.62	7.0	20.5	5.75	5.62	5.25	1.25	6.31	3.12	80	30	155
143T	10	35	0.62	34.0	14.81	2.62	7.0	20.5	5.75	5.62	5.25	1.25	6.31	3.12	80	40	165
145T	10	35	0.62	34.0	14.81	2.62	7.0	20.5	5.75	5.62	5.25	1.25	6.31	3.12	80	40	165
182T	10	35	0.62	35.0	14.81	2.62	7.0	20.5	5.75	5.62	5.25	1.25	6.31	3.12	80	80	205
184T	10	35	0.62	35.0	14.81	2.62	7.0	20.5	5.75	5.62	5.25	1.25	6.31	3.12	80	80	205
												-	-				

NOTES - Not for construction purposes unless certified above.


- All dimensions in inches. Some dimensions may vary +/- 0.25 inches.
- * Approximate only.
 ** Shaft centerline to underside of frame feet.

FORM PS00960 January 03



CUSTO	MER REF	OUR	REF
HP	RPM	VOLTAGE	ENCL

CERTIFIED - __ DATE - _____

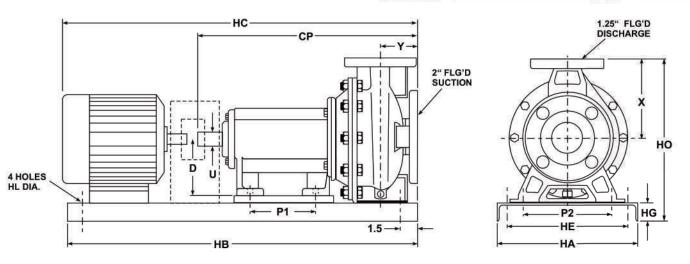

						DIM	ENSI	ONS					45		WE	IGHT (lb	s)*
MOTOR FRAME	HA	НВ	HL	HC*	но	HG	HE	CP	P1	P2	D**	U	X	Y	PUMP	MOTOR	ASS'Y
56	10	35	0.62	33.0	16.06	2.62	7.0	20.88	5.75	5.62	5.25	1.25	7.06	3.12	80	30	155
143T	10	35	0.62	34.0	16.06	2.62	7.0	20.88	5.75	5.62	5.25	1.25	7.06	3.12	80	40	165
145T	10	35	0.62	34.0	16.06	2.62	7.0	20.88	5.75	5.62	5.25	1.25	7.06	3.12	80	40	165
182T	10	35	0.62	35.0	16.06	2.62	7.0	20.88	5.75	5.62	5.25	1.25	7.06	3.12	80	80	205
184T	10	35	0.62	35.0	16.06	2.62	7.0	20.88	5.75	5.62	5.25	1.25	7.06	3.12	80	80	205
213T	12	40	0.62	39.0	16.44	3.00	9.0	20.88	5.75	5.62	5.25	1.25	7.06	3.12	80	150	275
215T	12	40	0.62	39.0	16.44	3.00	9.0	20.88	5.75	5.62	5.25	1.25	7.06	3.12	80	150	275

NOTES - Not for construction purposes unless certified above.


- All dimensions in inches. Some dimensions may vary +/- 0.25 inches.
- * Approximate only.
 ** Shaft centerline to underside of frame feet.

FORM PS00970 January 03



CUSTO	MER				
CUSTO	MER REF		OUR REF		
HP	RPM	VOLTAGE -	.50500	ENCL	

CERTIFIED - _ DATE - ___

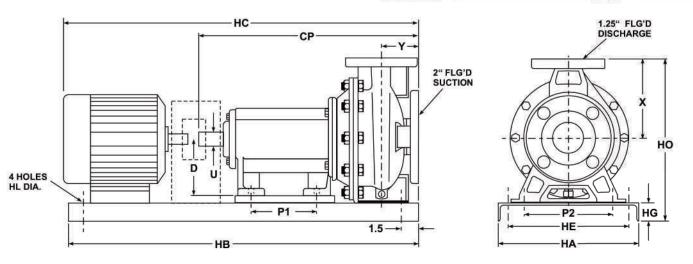

						DIM	ENSI	ONS					45		WE	IGHT (lb	s)*
MOTOR FRAME	HA	НВ	HL	HC*	но	HG	HE	CP	P1	P2	D**	U	X	Y	PUMP	MOTOR	ASS'Y
56	10	35	0.62	33.0	16.06	2.62	7.0	20.88	5.75	5.62	5.25	1.25	7.06	3.12	80	30	155
143T	10	35	0.62	34.0	16.06	2.62	7.0	20.88	5.75	5.62	5.25	1.25	7.06	3.12	80	40	165
145T	10	35	0.62	34.0	16.06	2.62	7.0	20.88	5.75	5.62	5.25	1.25	7.06	3.12	80	40	165
182T	10	35	0.62	35.0	16.06	2.62	7.0	20.88	5.75	5.62	5.25	1.25	7.06	3.12	80	80	205
184T	10	35	0.62	35.0	16.06	2.62	7.0	20.88	5.75	5.62	5.25	1.25	7.06	3.12	80	80	205
213T	12	40	0.62	39.0	16.44	3.00	9.0	20.88	5.75	5.62	5.25	1.25	7.06	3.12	80	150	275
215T	12	40	0.62	39.0	16.44	3.00	9.0	20.88	5.75	5.62	5.25	1.25	7.06	3.12	80	150	275

NOTES - Not for construction purposes unless certified above.


- All dimensions in inches. Some dimensions may vary +/- 0.25 inches.
- * Approximate only.
 ** Shaft centerline to underside of frame feet.

FORM PS00980 January 03



CUSTO	MER REF	OUR R	EF
HP	RPM	VOLTAGE	ENCL

CERTIFIED - _ DATE - ___

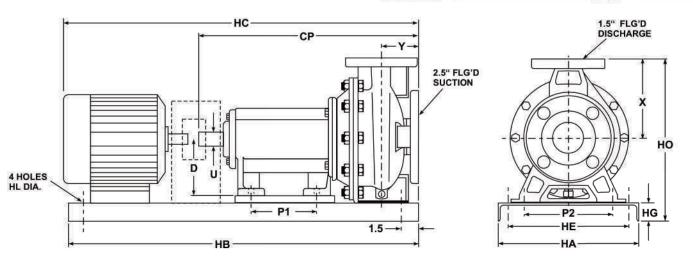

mace en com						DIM	ENSI	ONS		v-					WE	IGHT (lb	s)*
MOTOR FRAME	HA	НВ	HL	HC*	но	HG	HE	CP	P1	P2	D**	U	X	Y	PUMP	MOTOR	ASS'Y
56	10	35	0.62	32.0	13.38	2.62	7.0	20.12	5.75	5.62	5.25	1.25	5.50	3.12	80	30	155
143T	10	35	0.62	33.0	13.38	2.62	7.0	20.12	5.75	5.62	5.25	1.25	5.50	3.12	80	40	165
145T	10	35	0.62	33.0	13.38	2.62	7.0	20.12	5.75	5.62	5.25	1.25	5.50	3.12	80	40	165
182T	10	35	0.62	34.0	13.38	2.62	7.0	20.12	5.75	5.62	5.25	1.25	5.50	3.12	80	80	205
184T	10	35	0.62	34.0	13.38	2.62	7.0	20.12	5.75	5.62	5.25	1.25	5.50	3.12	80	80	205

NOTES - Not for construction purposes unless certified above.


- All dimensions in inches. Some dimensions may vary +/- 0.25 inches.
- Approximate only.
 Shaft centerline to underside of frame feet.

FORM PS00990 January 03



CUSTO	MER REF	OI	UR REF
HP	RPM	VOLTAGE	ENCL

CERTIFIED - _ DATE - ___

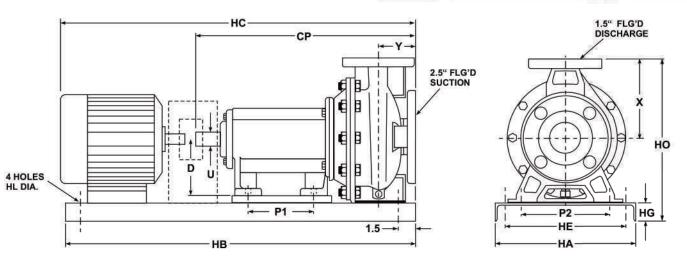

						DIM	ENSI	ONS							WE	IGHT (lb	s)*
MOTOR FRAME	HA	НВ	HL	HC*	но	HG	HE	CP	P1	P2	D**	U	X	Y	PUMP	MOTOR	ASS'Y
56	10	35	0.62	32.0	13.38	2.62	7.0	20.12	5.75	5.62	5.25	1.25	5.50	3.12	80	30	155
143T	10	35	0.62	33.0	13.38	2.62	7.0	20.12	5.75	5.62	5.25	1.25	5.50	3.12	80	40	165
145T	10	35	0.62	33.0	13.38	2.62	7.0	20.12	5.75	5.62	5.25	1.25	5.50	3.12	80	40	165
182T	10	35	0.62	34.0	13.38	2.62	7.0	20.12	5.75	5.62	5.25	1.25	5.50	3.12	80	80	205
184T	10	35	0.62	34.0	13.38	2.62	7.0	20.12	5.75	5.62	5.25	1.25	5.50	3.12	80	80	205
													-				

NOTES - Not for construction purposes unless certified above.


- All dimensions in inches. Some dimensions may vary +/- 0.25 inches.
- * Approximate only.
 ** Shaft centerline to underside of frame feet.

FORM PS01000 January 03



CUSTO	MER REF	OI	UR REF
HP	RPM	VOLTAGE	ENCL

CERTIFIED - _ DATE - ___

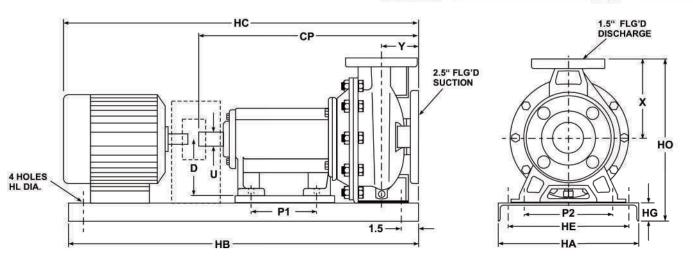

						DIM	ENSI	ONS							WE	IGHT (lb	s)*
MOTOR FRAME	HA	НВ	HL	HC*	но	HG	HE	CP	P1	P2	D**	U	X	Y	PUMP	MOTOR	ASS'Y
56	10	35	0.62	33.0	14.19	2.62	7.0	21.0	5.75	5.62	5.25	1.25	6.31	3.12	85	30	160
143T	10	35	0.62	34.0	14.19	2.62	7.0	21.0	5.75	5.62	5.25	1.25	6.31	3.12	85	40	170
145T	10	35	0.62	34.0	14.19	2.62	7.0	21.0	5.75	5.62	5.25	1.25	6.31	3.12	85	40	170
182T	10	35	0.62	35.0	14.19	2.62	7.0	21.0	5.75	5.62	5.25	1.25	6.31	3.12	85	80	210
184T	10	35	0.62	35.0	14.19	2.62	7.0	21.0	5.75	5.62	5.25	1.25	6.31	3.12	85	80	210
213T	12	40	0.62	39.0	14.56	3.00	9.0	21.0	5.75	5.62	5.25	1.25	6.31	3.12	85	150	370
215T	12	40	0.62	39.0	14.56	3.00	9.0	21.0	5.75	5.62	5.25	1.25	6.31	3.12	85	150	370

NOTES - Not for construction purposes unless certified above.


- All dimensions in inches. Some dimensions may vary +/- 0.25 inches.
- * Approximate only.
 ** Shaft centerline to underside of frame feet.

FORM PS01010 January 03



CUSTON	MER REF		OUR REF	
HP	RPM	VOLTAGE -	OUT INET.	ENCL

CERTIFIED - _ DATE - ___

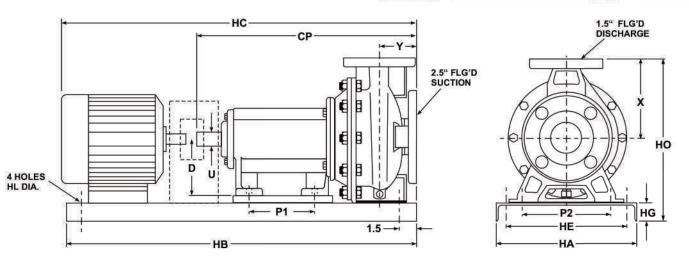

						DIM	ENSI	ONS							WE	IGHT (lb	s)*
MOTOR FRAME	HA	НВ	HL	HC*	но	HG	HE	CP	P1	P2	D**	U	X	Y	PUMP	MOTOR	ASS'Y
56	10	35	0.62	33.0	14.19	2.62	7.0	21.0	5.75	5.62	5.25	1.25	6.31	3.12	85	30	160
143T	10	35	0.62	34.0	14.19	2.62	7.0	21.0	5.75	5.62	5.25	1.25	6.31	3.12	85	40	170
145T	10	35	0.62	34.0	14.19	2.62	7.0	21.0	5.75	5.62	5.25	1.25	6.31	3.12	85	40	170
182T	10	35	0.62	35.0	14.19	2.62	7.0	21.0	5.75	5.62	5.25	1.25	6.31	3.12	85	80	210
184T	10	35	0.62	35.0	14.19	2.62	7.0	21.0	5.75	5.62	5.25	1.25	6.31	3.12	85	80	210
213T	12	40	0.62	39.0	14.56	3.00	9.0	21.0	5.75	5.62	5.25	1.25	6.31	3.12	85	150	370
215T	12	40	0.62	39.0	14.56	3.00	9.0	21.0	5.75	5.62	5.25	1.25	6.31	3.12	85	150	370

NOTES - Not for construction purposes unless certified above.


- All dimensions in inches. Some dimensions may vary +/- 0.25 inches.
- * Approximate only.
 ** Shaft centerline to underside of frame feet.

FORM PS01020 January 03



CUSTO	MER REF	OUR R	EF
HP	RPM	VOLTAGE	ENCL

CERTIFIED - _ DATE - ___

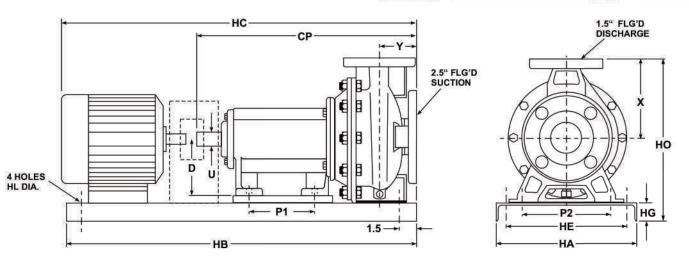

						DIM	ENSI	ONS		v-					WE	IGHT (lb	s)*
MOTOR FRAME	HA	НВ	HL	HC*	но	HG	HE	CP	P1	P2	D**	U	X	Y	PUMP	MOTOR	ASS'Y
56	10	35	0.62	34.0	16.06	2.62	7.0	22.0	5.75	5.62	5.25	1.25	7.06	3.94	85	30	160
143T	10	35	0.62	34.0	16.06	2.62	7.0	22.0	5.75	5.62	5.25	1.25	7.06	3.94	85	40	170
145T	10	35	0.62	34.0	16.06	2.62	7.0	22.0	5.75	5.62	5.25	1.25	7.06	3.94	85	40	170
182T	10	35	0.62	35.0	16.06	2.62	7.0	22.0	5.75	5.62	5.25	1.25	7.06	3.94	85	80	210
184T	10	35	0.62	35.0	16.06	2.62	7.0	22.0	5.75	5.62	5.25	1.25	7.06	3.94	85	80	210
213T	12	40	0.62	41.0	16.44	3.00	9.0	22.0	5.75	5.62	5.25	1.25	7.06	3.94	85	150	365
215T	12	40	0.62	41.0	16.44	3.00	9.0	22.0	5.75	5.62	5.25	1.25	7.06	3.94	85	150	365
254T	15	48	0.75	46.0	16.81	3.38	12.0	22.0	5.75	5.62	5.25	1.25	7.06	3.94	85	250	490

NOTES - Not for construction purposes unless certified above.


- All dimensions in inches. Some dimensions may vary +/- 0.25 inches.
- * Approximate only.
 ** Shaft centerline to underside of frame feet.

FORM PS01030 January 03



CUSTO	MER REF	c	OUR REF
HP	RPM	VOLTAGE	ENCL

CERTIFIED - __ DATE - ____

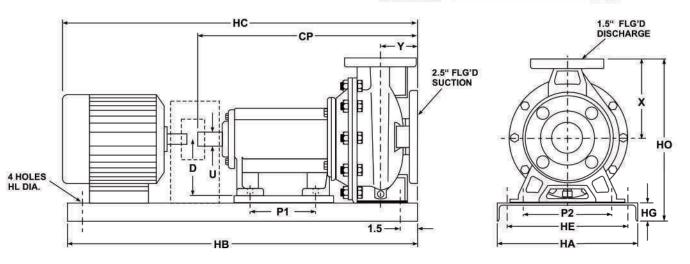

DIMENSIONS											WEIGHT (lbs)*						
MOTOR FRAME	HA	НВ	HL	HC*	но	HG	HE	CP	P1	P2	D**	U	X	Y	PUMP	MOTOR	ASS'Y
56	10	35	0.62	34.0	16.06	2.62	7.0	22.0	5.75	5.62	5.25	1.25	7.06	3.94	85	30	160
143T	10	35	0.62	34.0	16.06	2.62	7.0	22.0	5.75	5.62	5.25	1.25	7.06	3.94	85	40	170
145T	10	35	0.62	34.0	16.06	2.62	7.0	22.0	5.75	5.62	5.25	1.25	7.06	3.94	85	40	170
182T	10	35	0.62	35.0	16.06	2.62	7.0	22.0	5.75	5.62	5.25	1.25	7.06	3.94	85	80	210
184T	10	35	0.62	35.0	16.06	2.62	7.0	22.0	5.75	5.62	5.25	1.25	7.06	3.94	85	80	210
213T	12	40	0.62	41.0	16.44	3.00	9.0	22.0	5.75	5.62	5.25	1.25	7.06	3.94	85	150	365
215T	12	40	0.62	41.0	16.44	3.00	9.0	22.0	5.75	5.62	5.25	1.25	7.06	3.94	85	150	365
254T	15	48	0.75	46.0	16.81	3.38	12.0	22.0	5.75	5.62	5.25	1.25	7.06	3.94	85	250	490

NOTES - Not for construction purposes unless certified above.


- All dimensions in inches. Some dimensions may vary +/- 0.25 inches.
- * Approximate only.
 ** Shaft centerline to underside of frame feet.

FORM PS01040 January 03



CUSTO	MER				
CUSTO	MER REF		OUR REF		
HP	RPM	VOLTAGE -		ENCL	

CERTIFIED - _ DATE - ____

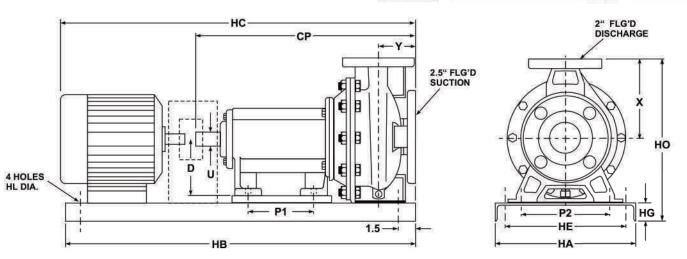

DIMENSIONS											WEIGHT (lbs)*						
MOTOR	HA	НВ	HL	HC*	но	HG	HE	CP	P1	P2	D**	U	X	Y	PUMP	MOTOR	ASS'Y
56	10	35	0.62	33.0	14.19	2.62	7.0	22.0	5.75	5.62	5.25	1.25	6.31	3.94	90	30	165
143T	10	35	0.62	34.0	14.19	2.62	7.0	22.0	5.75	5.62	5.25	1.25	6.31	3.94	90	40	175
145T	10	35	0.62	34.0	14.19	2.62	7.0	22.0	5.75	5.62	5.25	1.25	6.31	3.94	90	40	175
182T	10	35	0.62	35.0	14.19	2.62	7.0	22.0	5.75	5.62	5.25	1.25	6.31	3.94	90	80	215
184T	10	35	0.62	35.0	14.19	2.62	7.0	22.0	5.75	5.62	5.25	1.25	6.31	3.94	90	80	215
213T	12	40	0.62	40.0	14.56	3.00	9.0	22.0	5.75	5.62	5.25	1.25	6.31	3.94	90	150	370
215T	12	40	0.62	40.0	14.56	3.00	9.0	22.0	5.75	5.62	5.25	1.25	6.31	3.94	90	150	370

NOTES - Not for construction purposes unless certified above.


- All dimensions in inches. Some dimensions may vary +/- 0.25 inches.
- Approximate only.
 Shaft centerline to underside of frame feet.

FORM PS01050 January 03



CUSTO	MER		
CUSTO	MER REF	OUR F	REF
HP	RPM	VOLTAGE	ENCL

CERTIFIED - _ DATE - _____

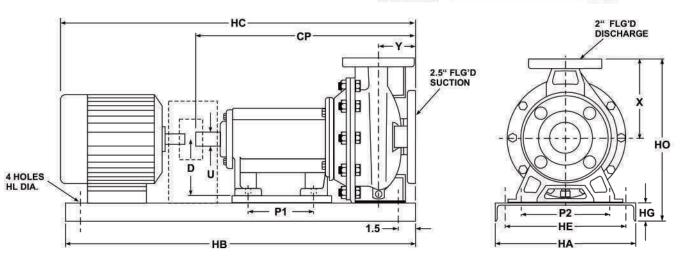

DIMENSIONS												WEIGHT (lbs)*					
MOTOR FRAME	HA	НВ	HL	HC*	но	HG	HE	CP	P1	P2	D**	U	X	Y	PUMP	MOTOR	ASS'Y
56	10	35	0.62	33.0	14.19	2.62	7.0	22.0	5.75	5.62	5.25	1.25	6.31	3.94	90	30	165
143T	10	35	0.62	34.0	14.19	2.62	7.0	22.0	5.75	5.62	5.25	1.25	6.31	3.94	90	40	175
145T	10	35	0.62	34.0	14.19	2.62	7.0	22.0	5.75	5.62	5.25	1.25	6.31	3.94	90	40	175
182T	10	35	0.62	35.0	14.19	2.62	7.0	22.0	5.75	5.62	5.25	1.25	6.31	3.94	90	80	215
184T	10	35	0.62	35.0	14.19	2.62	7.0	22.0	5.75	5.62	5.25	1.25	6.31	3.94	90	80	215
213T	12	40	0.62	40.0	14.56	3.00	9.0	22.0	5.75	5.62	5.25	1.25	6.31	3.94	90	150	370
215T	12	40	0.62	40.0	14.56	3.00	9.0	22.0	5.75	5.62	5.25	1.25	6.31	3.94	90	150	370

NOTES - Not for construction purposes unless certified above.

- All dimensions in inches. Some dimensions may vary +/- 0.25 inches.
- Approximate only.

 Shaft centerline to underside of frame feet.

FORM PS01060 January 03

We are proud supplier for the following completed and on going projects:



Bethware Elementary
High School

5 Bethware Dr. Kings Mour

115 Bethware Dr, Kings Mountain, NC, United States



Old Montreal College 255 Ontario Est Montreal, Quebec, CA



Ratiopharm Inc. 17800 Rue Lapointe, Mirabel, QC, CA



Campus 99 5151 Côte-Ste-Catherine Road, Montréal, QC, CA

Sales and Service:

Quebec, Canada Tel.: (450) 621-2995 Fax: (450) 621-4995

Lake Worth Florida, USA 33467-5749

Toronto, Canada

Tel.: +1 (647) 544-2995







